

Advanced Monolithic Systems

AMS78LXX

100mA VOLTAGE REGULATOR

RoHS compliant

FEATURES

- 5.0V, 6.2V and 8.0V Output Voltage Available*
- Output Voltage Tolerance of $\pm 5\%$ Over Temperature
- Output Current in excess of 100mA
- Internal Thermal Overload Protection
- Overvoltage Protection
- Short Circuit protection
- TO-92, SO-8 and SOT-89 Packages Available

APPLICATIONS

- Battery Powered Systems
- Portable Consumer Equipment
- Cordless Telephones
- Portable (Notebook) Computers
- Portable Instrumentation
- Radio Control Systems
- Logic Systems

GENERAL DESCRIPTION

The AMS78LXX series consists of positive fixed voltage regulators ideally suited for use in battery-powered systems. These devices feature very low quiescent current of 1mA or less when supplying 10mA loads. This unique characteristic and the low input -output differential of less than 1V required for proper regulation, make the AMS78LXX ideal to use for standby power systems and portable equipment.

The AMS78LXX series also includes internal current limiting, over voltage protection, thermal shutdown, and is able to withstand temporary power-up with mirror-image insertion.




The AMS78LXX series is offered in the 3-pin TO-92 package, 8-pin plastic SOIC and SOT-89 packages.

ORDERING INFORMATION

| OUTPUT VOLTAGE* | PACKAGE TYPE | | | OPER. TEMP RANGE |
|--------------------|--------------|-------------|-----------|---------------------|
| | TO-92 | 8 LEAD SOIC | SOT-89 | |
| 5.0V | AMS78L05N | AMS78L05S | AMS78L05L | -40°C to +85 °C |
| 6.2V | AMS78L62N | AMS78L62S | AMS78L62L | -40°C to +85 °C |
| 8.0V | AMS78L08N | AMS78L08S | AMS78L08L | -40°C to +85 °C |

* For other fixed voltages consult factory.

PIN CONNECTION



Bottom View

Top View

Front View

ABSOLUTE MAXIMUM RATINGS (Note 1)

Overvoltage Protection 24V to 40V
 Power Dissipation (Note 4) Internally Limited
 Storage Temperature -65°C to +150°C
 ESD 1000V

OPERATING RATINGS (Note 1)
 Maximum Operating Input Voltage 4V to 22V
 Operating Junction Temperature 0°C to +125°C
 Lead Temperature (Soldering 25 sec) 265°C

ELECTRICAL CHARACTERISTICS**AMS78L05**

Electrical Characteristics at $V_{IN} = 10V$, $I_O = 10mA$, $T_J = 25^\circ C$, $C_L = 0.33\mu F$, $C_O = 10\mu F$ unless otherwise specified.

| PARAMETER | CONDITIONS (Note 2) | Min. | Typ. | Max. | Units |
|---|---|-------------|-------|-------------|-------|
| Output Voltage | | 4.80 | 5.0 | 5.2 | V |
| | $7V \leq V_{IN} \leq 20V$, $I_O = 100 mA$ $-40^\circ C \leq T_J \leq 125^\circ C$ | 4.75 | | 5.25 | V |
| Line Regulation | $7V \leq V_{IN} \leq 20V$ | | 18 | 75 | mV |
| | $8V \leq V_{IN} \leq 20V$ | | 10 | 54 | |
| Load Regulation | $1mA \leq I_O \leq 100 mA$ | | 20 | 60 | mV |
| | $1mA \leq I_O \leq 40 mA$ | | 5 | 30 | |
| Quiescent Current | | | 0.6 | 1.0 | mA |
| Output Noise Voltage | 10Hz-100kHz | | 40 | | µV |
| Peak Output Current | | | 200 | | mA |
| Average Output Voltage Tempco | $I_O = 5 mA$ | | -0.65 | | mV/°C |
| Ripple Rejection | $f_O = 120Hz$ $8V \leq V_{IN} \leq 16V$ | 47 | 62 | | dB |
| Minimum Value of Input Voltage Required to Maintain Line Regulation | | | 5.6 | 6.0 | V |

AMS78L62

Electrical Characteristics at $V_{IN} = 12V$, $I_O = 10mA$, $T_J = 25^\circ C$, $C_L = 0.33\mu F$, $C_O = 10\mu F$ unless otherwise specified.

| PARAMETER | CONDITIONS (Note 2) | Min. | Typ. | Max. | Units |
|-------------------------------|---|------------|-------|------------|-------|
| Output Voltage | | 5.95 | 6.2 | 6.45 | V |
| | $8.5V \leq V_{IN} \leq 20V$, $I_O = 100 mA$ $-40^\circ C \leq T_J \leq 125^\circ C$ | 5.9 | | 6.5 | V |
| Line Regulation | $8.5V \leq V_{IN} \leq 20V$ | | 65 | 175 | mV |
| | $9V \leq V_{IN} \leq 20V$ | | 55 | 125 | |
| Load Regulation | $1mA \leq I_O \leq 100 mA$ | | 13 | 80 | mV |
| | $1mA \leq I_O \leq 40 mA$ | | 6 | 40 | |
| Quiescent Current | | | 0.6 | 1.0 | mA |
| Output Noise Voltage | 10Hz-100kHz | | 50 | | µV |
| Peak Output Current | | | 200 | | mA |
| Average Output Voltage Tempco | $I_O = 5 mA$ | | -0.75 | | mV/°C |

ELECTRICAL CHARACTERISTICS (Continued)

AMS78L62

Electrical Characteristics at $V_{IN}=12V$, $I_O=10mA$, $T_J=25^{\circ}C$, $C_1=0.33\mu F$, $C_O=10\mu F$ unless otherwise specified.

| PARAMETER | CONDITIONS (Note 2) | Min. | Typ. | Max. | Units |
|---|---|------|------|------|-------|
| Ripple Rejection | $f_0 = 120Hz$ $10V \leq V_{IN} \leq 20V$ | 40 | 46 | | dB |
| Minimum Value of Input Voltage Required to Maintain Line Regulation | | | 6.8 | 7.0 | V |

AMS78L08

Electrical Characteristics at $V_{IN}=14V$, $I_O=10mA$, $T_J=25^{\circ}C$, $C_1=0.33\mu F$, $C_O=10\mu F$ unless otherwise specified.

| PARAMETER | CONDITIONS (Note 2) | Min. | Typ. | Max. | Units |
|---|--|-------------|-------|-------------|-------|
| Output Voltage | | 7.60 | 8.0 | 8.40 | V |
| | $11V \leq V_{IN} \leq 23V$, $I_O=100 mA$ $-40^{\circ}C \leq T_J \leq 125^{\circ}C$ | 7.60 | | 8.40 | V |
| Line Regulation | $11V \leq V_{IN} \leq 23V$ | | 80 | 175 | mV |
| | $12V \leq V_{IN} \leq 23V$ | | 70 | 125 | |
| Load Regulation | $1mA \leq I_O \leq 100 mA$ | | 15 | 80 | mV |
| | $1mA \leq I_O \leq 40 mA$ | | 8 | 40 | |
| Quiescent Current | | | 0.6 | 1.0 | mA |
| Output Noise Voltage | 10Hz-100kHz | | 60 | | µV |
| Peak Output Current | | | 200 | | mA |
| Average Output Voltage Tempco | $I_O = 5 mA$ | | -0.78 | | mV/°C |
| Ripple Rejection | $f_0 = 120Hz$ $12V \leq V_{IN} \leq 22V$ | 39 | 45 | | dB |
| Minimum Value of Input Voltage Required to Maintain Line Regulation | | | 9.0 | 9.5 | V |










Note 1: Absolute Maximum Ratings are limits beyond which damage to the device may occur. For guaranteed performance limits and associated test conditions, see the Electrical Characteristics tables.

Note 2: See Circuit in Typical Applications. To ensure constant junction temperature, low duty cycle pulse testing is used.




Note 3: Limits appearing in **boldface** type apply over the entire junction temperature range for operation. Limits appearing in normal type apply for $T_A = T_J = 25^{\circ}C$.

Note 4: The junction-to-ambient thermal resistance are as follows: $195^{\circ}C/W$ for the TO-92 (N) package, $160^{\circ}C/W$ for the molded plastic SO-8 (S), $150^{\circ}C/W$ for the SOT-89 package.

TYPICAL PERFORMANCE CHARACTERISTICS

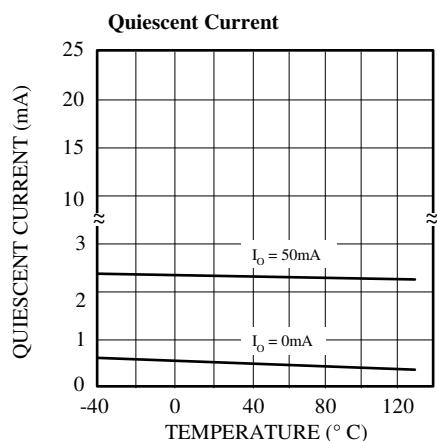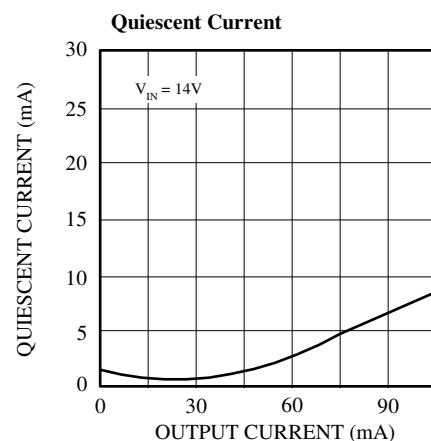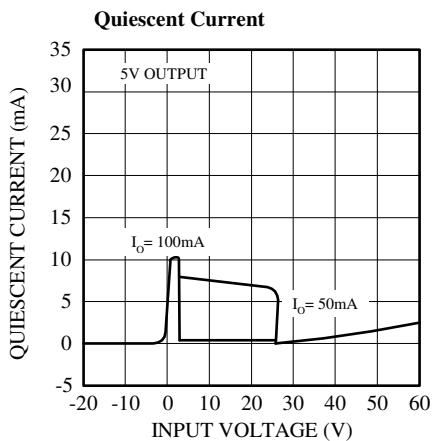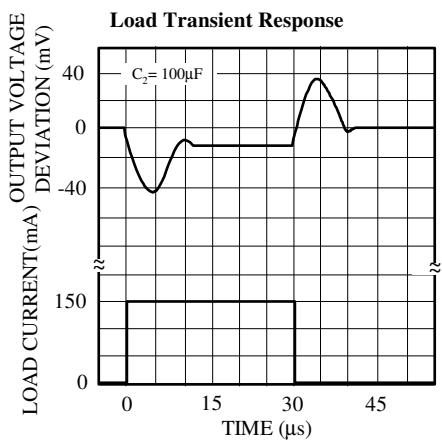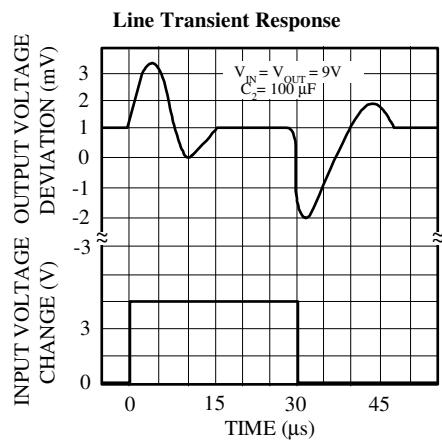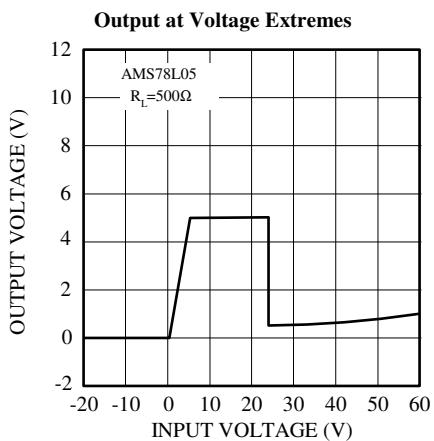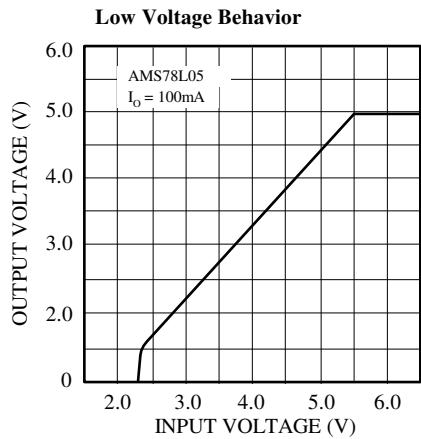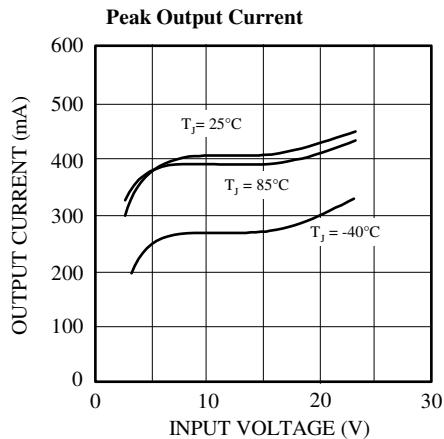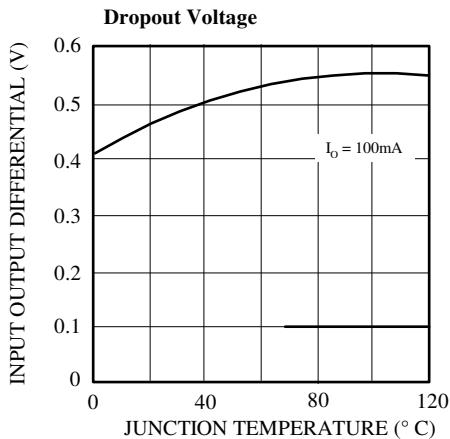


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

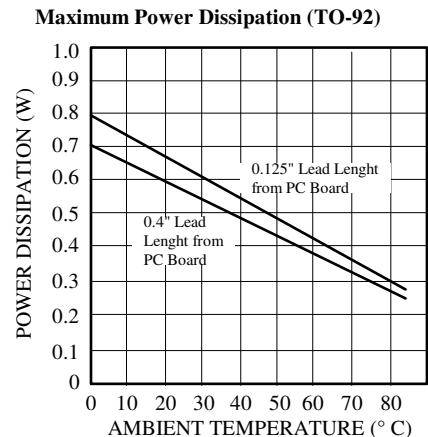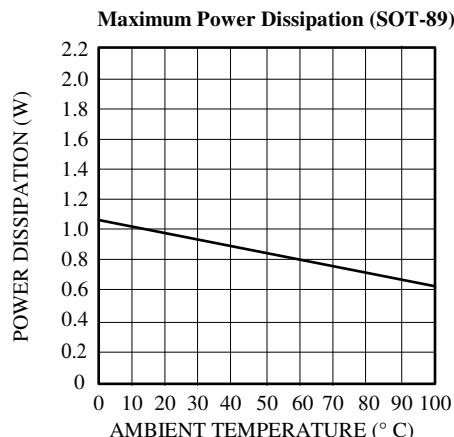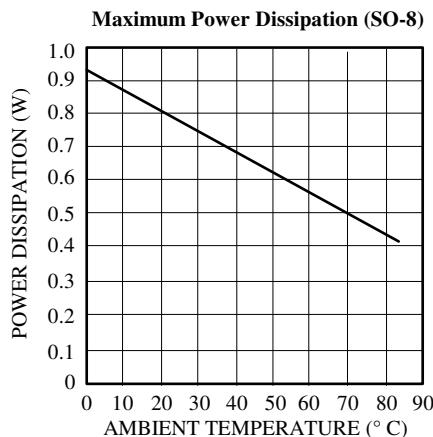

TYPICAL APPLICATIONS


Fixed Output Regulator

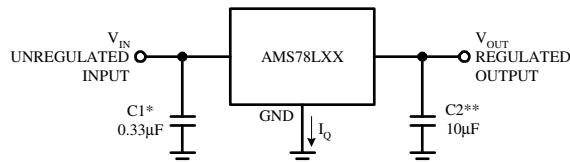

*Required if regulator is located far from power supply filter.

**C2 must be at least 10μF to maintain stability; it can be increased without bound to maintain regulation during transients and it should be located as close as possible to the regulator. This capacitor must be rated over the same operating temperature range like the regulator.

Current Regulator

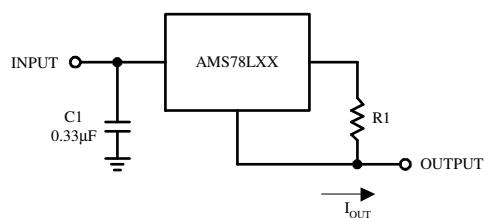


$$I_{OUT} = (V_{OUT}/R1) + I_Q$$


> $I_Q = 1.5\text{mA}$ over line and load changes

PACKAGE DIMENSIONS inches (millimeters) unless otherwise noted.

3 LEAD TO-92 PLASTIC PACKAGE (N)

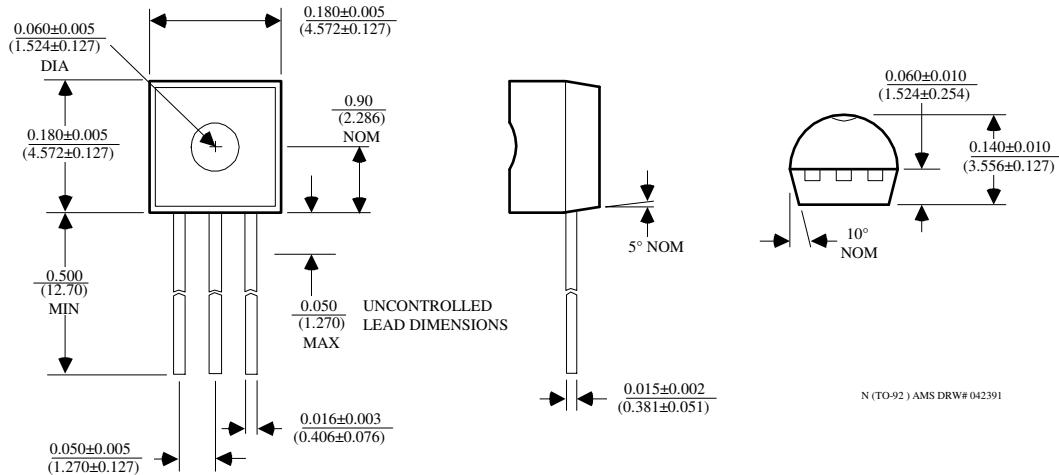

8 LEAD SOIC PLASTIC PACKAGE (S)

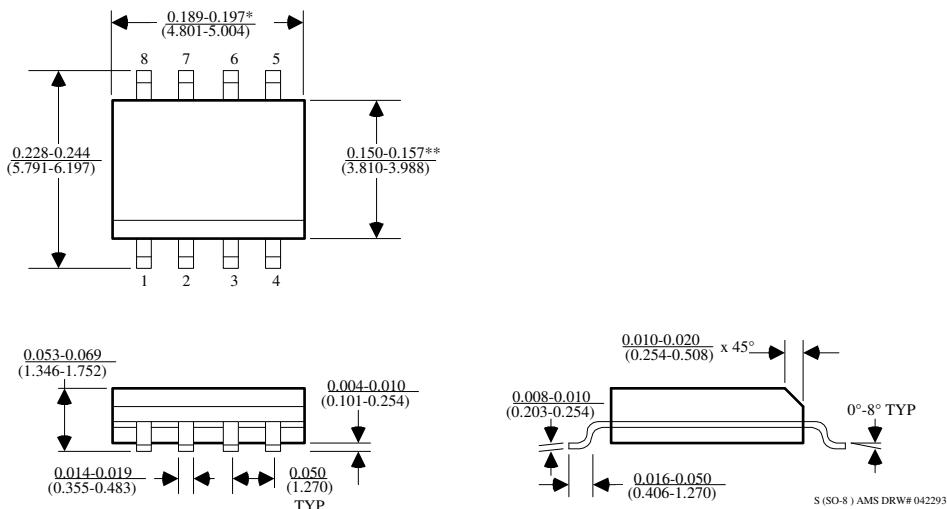

*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

**DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

PACKAGE DIMENSIONS inches (millimeters) unless otherwise noted (Continued).

SOT-89 PLASTIC PACKAGE (L)

