

MITSUBISHI IGBT MODULES
CM150TL-12NF

HIGH POWER SWITCHING USE

CM150TL-12NF



- IC 150A
- VCES 600V
- Insulated Type
- 6-elements in a pack



APPLICATION

AC drive inverters & Servo controls, etc


OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

www.BDTIC.com/MITSUBISHI

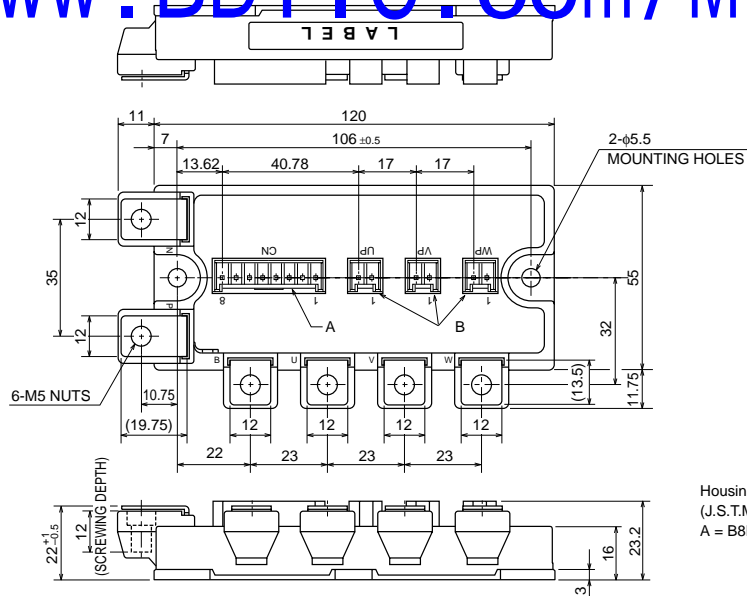

Housing Type of A and B
 (J.S.T.Mfg.Co.Ltd)
 A = B8P-VH-FB-B, B = B2P-VH-FB-B

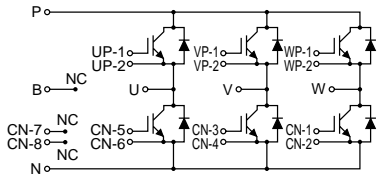

CIRCUIT DIAGRAM

CM150TL-12NF

HIGH POWER SWITCHING USE

ABSOLUTE MAXIMUM RATINGS (Tj = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CE}	Collector-emitter voltage	G-E Short	600	V
V _{GE}	Gate-emitter voltage	C-E Short	±20	V
I _C	Collector current	DC, T _c = 93°C ^{*1}	150	A
I _{CM}		Pulse (Note 2)	300	A
I _E (Note 1)	Emitter current		150	A
I _{EM} (Note 1)		Pulse (Note 2)	300	A
P _C (Note 3)	Maximum collector dissipation	T _c = 25°C	730	W
T _j	Junction temperature		-40 ~ +150	°C
T _{stg}	Storage temperature		-40 ~ +125	°C
V _{iso}	Isolation voltage	Main Terminal to base plate, AC 1 min.	2500	V
—	Torque strength	Main Terminal M5	2.5 ~ 3.5	N • m
—		Mounting holes M5	2.5 ~ 3.5	N • m
—	Weight	Typical value	350	g

ELECTRICAL CHARACTERISTICS (Tj = 25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I _{CS}	Collector cutoff current	V _{CE} = V _{CE} , V _{GE} = 0V	—	—	1	mA
V _{GE(th)}	Gate-emitter threshold voltage	I _C = 15mA, V _{CE} = 10V	6	7	8	V
I _{GES}	Gate leakage current	V _{GE} = V _{GES} , V _{CE} = 0V	—	—	0.5	µA
V _{CE(sat)}	Collector-emitter saturation voltage	I _C = 150A, V _{GE} = 15V	—	1.7	2.2	V
C _{iss}	Input capacitance	V _{CE} = 10V	—	1.7	2.8	nF
C _{oss}	Output capacitance	V _{CE} = 10V, V _{GE} = 0V	—	—	2.8	nF
C _{res}	Reverse transfer capacitance	V _{CE} = 10V, V _{GE} = 0V	—	—	0.9	nF
Q _G	Total gate charge	V _{CC} = 300V, I _C = 150A, V _{GE} = 15V	—	600	—	nC
t _{d(on)}	Turn-on delay time	V _{CC} = 300V, I _C = 150A	—	—	120	ns
t _r	Turn-on rise time	V _{GE1} = V _{GE2} = 15V	—	—	100	ns
t _{d(off)}	Turn-off delay time	R _G = 4.2Ω, Inductive load switching operation	—	—	300	ns
t _f	Turn-off fall time	I _E = 150A	—	—	300	ns
t _{rr} (Note 1)	Reverse recovery time		—	—	150	ns
Q _{rr} (Note 1)	Reverse recovery charge		—	2.5	—	µC
V _{EC} (Note 1)	Emitter-collector voltage	I _E = 150A, V _{GE} = 0V	—	—	2.8	V
R _{th(j-c)Q}	Thermal resistance	IGBT part (1/6 module) ^{*1}	—	—	0.17	°C/W
R _{th(j-c)R}		FWDi part (1/6 module) ^{*1}	—	—	0.31	°C/W
R _{th(c-f)}	Contact thermal resistance	Case to fin, Thermal compound Applied (1/6 module) ^{*2}	—	0.085	—	°C/W
R _G	External gate resistance		4.2	—	42	Ω

*1 : To measured point is just under the chips.

If you use this value, R_{th(f-a)} should be measured just under the chips.

*2 : Typical value is measured by using Shin-etsu Silicone "G-746".

Note 1. I_E, V_{EC}, t_{rr} & Q_{rr} represent characteristics of the anti-parallel, emitter to collector free-wheel diode (FWDi).

2. Pulse width and repetition rate should be such that the device junction temp. (T_j) does not exceed T_{jmax} rating.

3. Junction temperature (T_j) should not increase beyond 150°C.


4. Pulse width and repetition rate should be such as to cause negligible temperature rise.

CM150TL-12NF


HIGH POWER SWITCHING USE

PERFORMANCE CURVES


OUTPUT CHARACTERISTICS (TYPICAL)

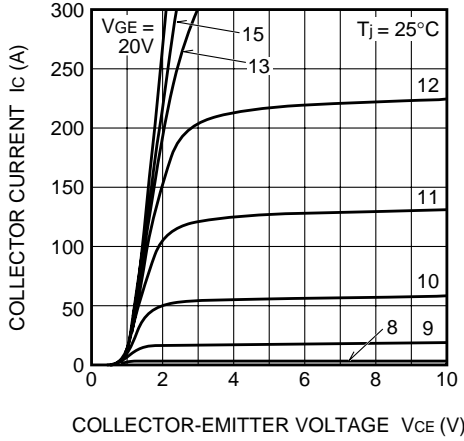


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

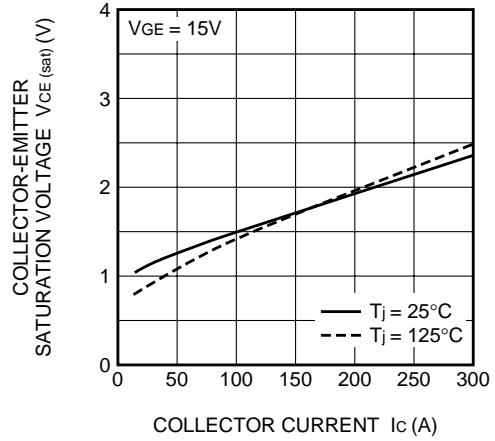

COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

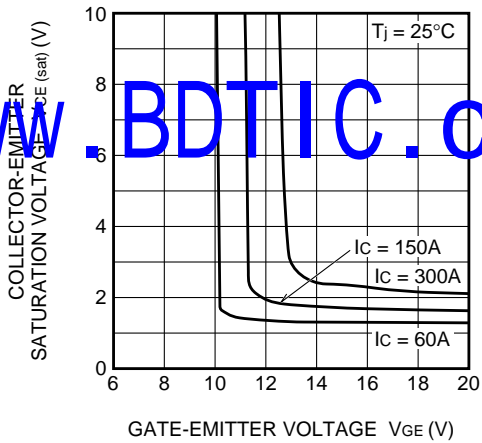


FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

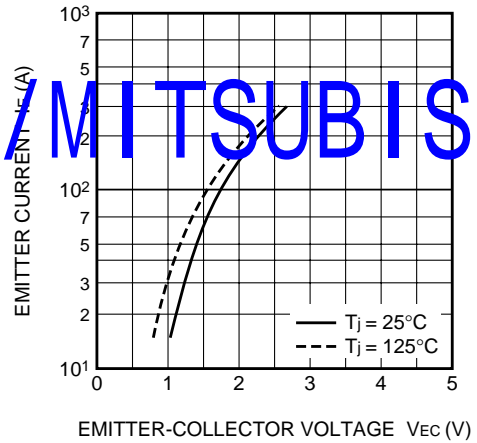


www.BDTIC.com/MITSUBISHI


CAPACITANCE-VCE CHARACTERISTICS (TYPICAL)

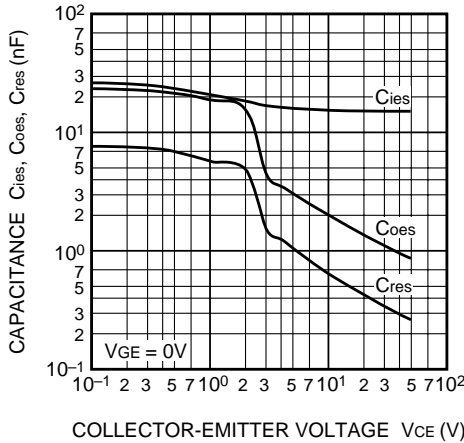


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

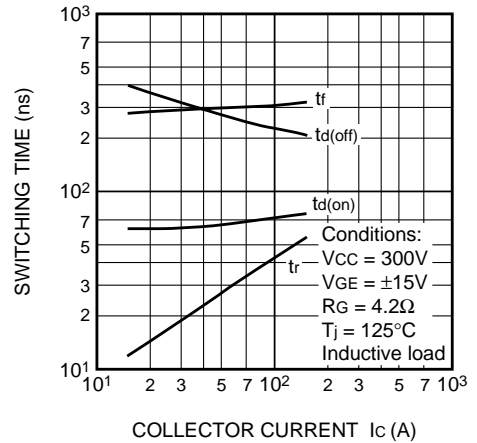

REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

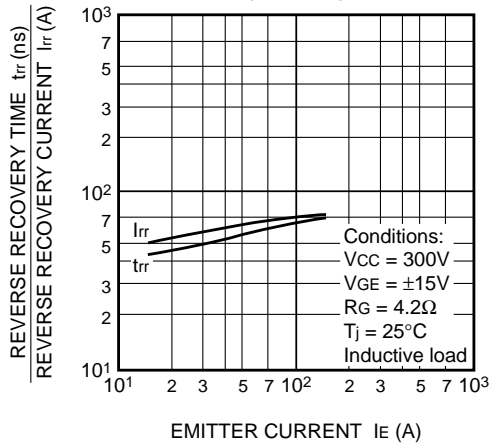


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT part & FWDi part)

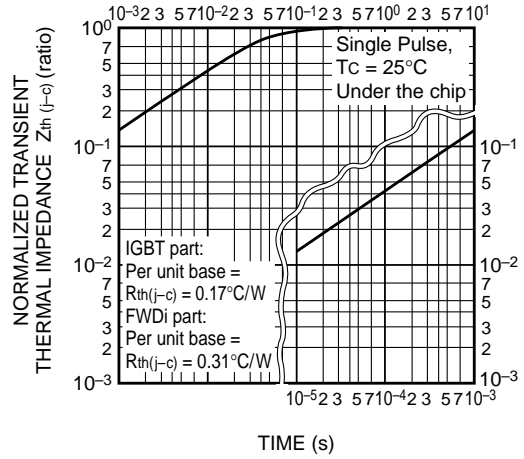


EMITTER CURRENT I_E (A)

TIME (s)

SWITCHING LOSS vs. COLLECTOR CURRENT (TYPICAL)

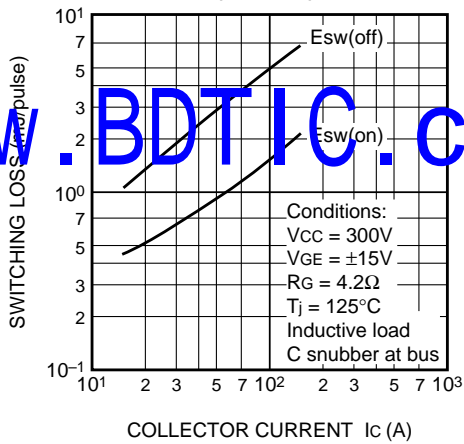


SWITCHING LOSS vs. GATE RESISTANCE (TYPICAL)

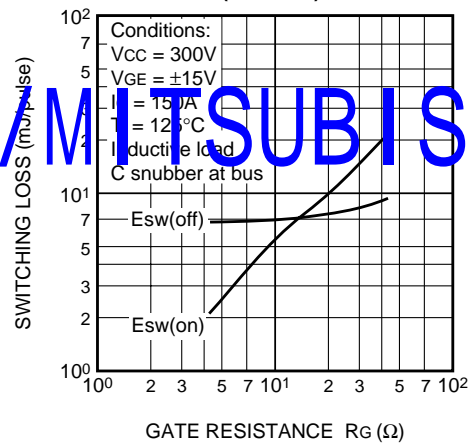


COLLECTOR CURRENT I_c (A)

GATE RESISTANCE R_g (Ω)

RECOVERY LOSS vs. I_E (TYPICAL)

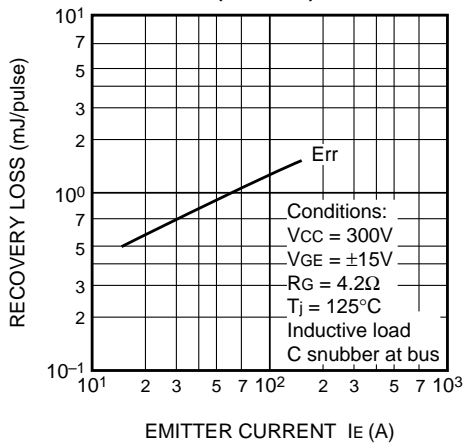


RECOVERY LOSS vs. GATE RESISTANCE (TYPICAL)

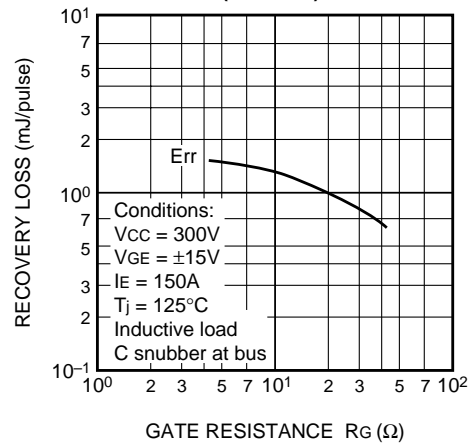

EMITTER CURRENT I_E (A)

GATE RESISTANCE R_g (Ω)

www.BDTIC.com/MITSUBISHI

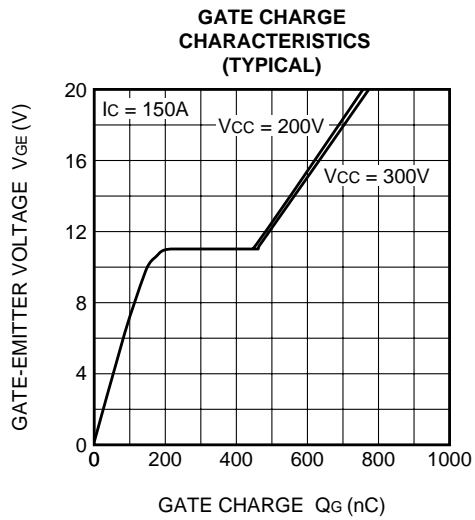

www.BDTIC.com/MITSUBISHI