
## SFPCS with LED SERIES





#### **◆**Feature

- 1.3mm travel
- Support 2 poles.

# **♦**Applications

• Applicable to all types of audio products, TV, VCR related devices and other home equipment.


## **Common specifications**

Items	Stand specification
Ratings	0.2A 20V DC
Operating life without load	10,000 cycles
Initial contact resistance	$50$ m $\Omega$ max.

#### **◆**Products line

Ratings	Poles	Position	Terminal	Changeover timing	Operating force	Operating	Travel (mm)	Total travel (mm)	Products No.	Drawing No.
0.2A	2	2	Straight	Non shorting	250±100gf	Self lock	1.3	2	SFPCS012NX01	1

### **♦LED PUSH SWITCH PRODUCTS NUMBERING SYSTEM**

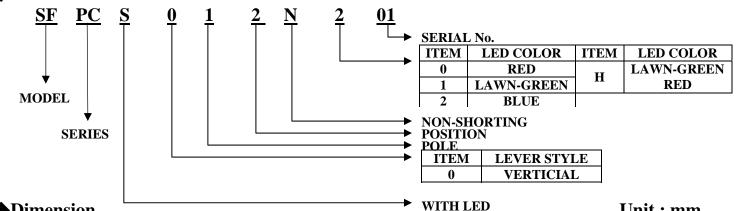

#### Dimension

PUIN	nension	WIIII EED	Unit: mm			
No	Dimensions	Viewed fro P.C. board mou	Circuit diagram Viewed from the direction A  P.C. board mounting hole dimensions (viewed from the direction A)			
1	Sect ELAN.  Social ELAN.  Soci	1 - 4 8 + 2 - 5 7 - 6 7 -	6-01°300HOLE			