

Medium Power Film Capacitors



FFLB Design

DC FILTERING


ELECTRICAL CHARACTERISTICS

| | |
|-----------------------------------|---------------------------|
| Capacitance Range C_N | 58 μ F to 800 μ F |
| Tolerance on C_N | $\pm 10\%$ |
| Rated DC Voltage U_N dc | 680 to 1900 V |
| Maximum rms Current I_{rms} max | up to 60 Arms |
| Stray Inductance L_s | 60 to 100 nH |

FFLB

| Part Number | Capacitance (μ F) | Height mm (in) | I_{rms} (A) | L_s (nH) | R_s (m Ω) | R_{th} ($^{\circ}$ C/W) | Weight (kg) |
|------------------------------------|------------------------|----------------|---------------|------------|---------------------|----------------------------|-------------|
| U_N dc: 680 V | | | | | | | |
| FFLB6A0807K-- | 800 | 170 (6.693) | 45 | 100 | 6.5 | 3.2 | 1.5 |
| FFLB6A0657K-- | 650 | 145 (5.709) | 60 | 85 | 5.6 | 3.3 | 1.3 |
| FFLB6A0387K-- | 380 | 97 (3.819) | 60 | 60 | 3.6 | 3.4 | 0.9 |
| U_N dc: 1000 V | | | | | | | |
| FFLB6L0467K-- | 460 | 170 (6.693) | 45 | 100 | 6.1 | 3.2 | 1.5 |
| FFLB6L0397K-- | 390 | 145 (5.709) | 60 | 85 | 5.2 | 3.3 | 1.3 |
| FFLB6L0237K-- | 230 | 97 (3.819) | 60 | 60 | 3.5 | 3.7 | 0.9 |
| U_N dc: 1200 V | | | | | | | |
| FFLB6U0327K-- | 320 | 170 (6.693) | 45 | 100 | 7.2 | 3.2 | 1.5 |
| FFLB6U0277K-- | 270 | 145 (5.709) | 60 | 85 | 6.1 | 3.3 | 1.3 |
| FFLB6U0167K-- | 160 | 97 (3.819) | 60 | 60 | 4.1 | 3.7 | 0.9 |
| U_N dc: 1900 V | | | | | | | |
| FFLB6N1256K-- | 125 | 170 (6.693) | 50 | 100 | 3.8 | 3.1 | 1.5 |
| FFLB6N0107K-- | 100 | 145 (5.709) | 55 | 85 | 3.4 | 3.3 | 1.3 |
| FFLB6N0586K-- | 58 | 97 (3.819) | 60 | 60 | 2.3 | 3.4 | 0.9 |

LIFETIME EXPECTANCY vs HOT SPOT TEMPERATURE AND VOLTAGE

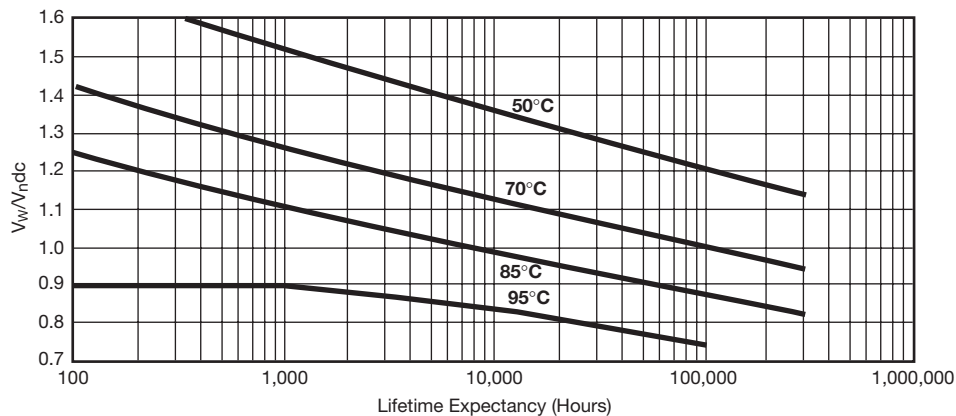

V_w : permanent working or operating DC-voltage.

HOT SPOT CALCULATION

$$\theta_{hot\ spot} = \theta_{ambient} + (P_d + P_t) \times R_{th}$$

with P_d (Dielectric losses) = $Q \times tg\delta_0$
 $\Rightarrow [\frac{1}{2} \times C_n \times (V_{peak\ to\ peak})^2 \times f] \times (2 \times 10^{-4})$
 P_t (Thermal losses) = $R_s \times (I_{rms})^2$

where C_n in Farad I_{rms} in Ampere f in Hertz V in Volt R_s in Ohm θ in $^{\circ}$ C R_{th} in $^{\circ}$ C/W