



## LOW FORWARD VOLTAGE SCHOTTKY BARRIER RECTIFIER

**SRBL1630 THRU SRBL1660**

**VOLTAGE RANGE**

**30 t o 60 Volts**

**CURRENT**


**16.0 Amperes**

### FEATURES

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High efficiency
- High Surge Capability
- High Current capacity and Low Forward Voltage Drop
- For use in low voltage high frequency inverters, Free wheeling, and polarity protection applications
- Plastic Material has UL Flammability Classification 94V-0

### MECHANICAL DATA

- Case: D<sup>2</sup>-PAK molded plastic
- Terminals: Plated Lead solderable per MIL-STD-202 Method 208
- Polarity: See Diagram
- Weight: 1.7 grams (approx)
- Mounting Position: Any
- Marking: Type Number

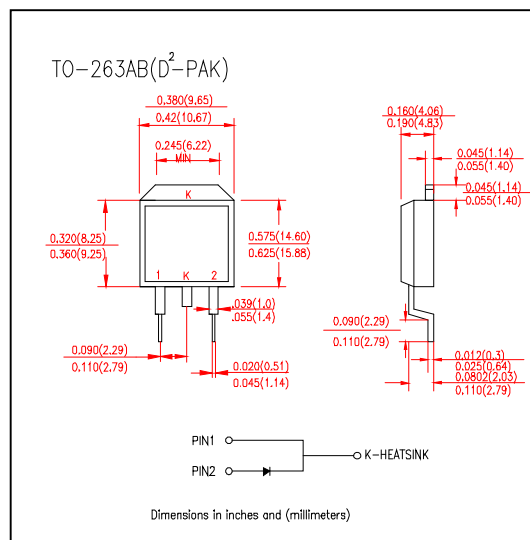

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

|   | SYMBOLS                         | SRBL 1630     | SRBL 1635 | SRBL 1640 | SRBL 1645 | SRBL 1650 | SRBL 1660 | UNIT |
|---|---------------------------------|---------------|-----------|-----------|-----------|-----------|-----------|------|
| Peak Repetitive Reverse Voltage   | $V_{RRM}$                       | 30            | 35        | 40        | 45        | 50        | 60        | V    |
| Working Peak Reverse Voltage  | $V_{RWM}$                       |               |           |           |           |           |           |      |
| DC Blocking Voltage   | $V_R$                           |               |           |           |           |           |           |      |
| RMS Reverse Voltage   | $V_{R(RMS)}$                    | 21            | 25        | 28        | 32        | 35        | 42        | V    |
| Average Rectified Output Current (Note 1)@T <sub>c</sub> =95°C  | $I_O$                           | 16.0          |           |           |           |           |           | A    |
| Non-Repetitive Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method) | $I_{FSM}$                       | 250           |           |           |           |           |           | A    |
| Forward Voltage Drop @ I <sub>F</sub> =16A, T <sub>c</sub> =25°C  | $V_{FM}$                        | 0.55          |           |           |           | 0.75      |           | V    |
| Peak Reverse Current at Rated DC Blocking Voltage   | T <sub>c</sub> = 25°C           | 1.0           |           |           |           |           |           | mA   |
|   | T <sub>c</sub> = 100°C          | 50            |           |           |           |           |           |      |
| Typical Junction Capacitance(Note2)   | $C_j$                           | 700           |           |           |           |           |           | pF   |
| Typical Resistance Junction to case(Note1)  | $R_{\theta JC}$                 | 3.5           |           |           |           |           |           | °C/W |
| Operating and Storage Temperature Range   | T <sub>J</sub> T <sub>STG</sub> | (-55 to +150) |           |           |           |           |           | °C   |

#### Notes:

1. Thermal Resistance Junction to case mounted on heatsink
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC



## LOW FORWARD VOLTAGE SCHOTTKY BARRIER RECTIFIER

**SRBL1630 THRU SRBL1660**

|                      |                       |
|----------------------|-----------------------|
| <b>VOLTAGE RANGE</b> | <b>30 to 60 Volts</b> |
| <b>CURRENT</b>       | <b>16.0 Ampere</b>    |

### RATINGE AND CHARACTERISTIC CURVES SRBL1630 THRU SRBL1660

