

MITSUBISHI IGBT MODULES  
**CM200TL-12NF**

HIGH POWER SWITCHING USE

**CM200TL-12NF**



- IC .....200A
- VCES .....600V
- Insulated Type
- 6-elements in a pack



**APPLICATION**

AC drive inverters & Servo controls, etc


**OUTLINE DRAWING & CIRCUIT DIAGRAM**

Dimensions in mm

[www.BDTIC.com/MITSUBISHI](http://www.BDTIC.com/MITSUBISHI)

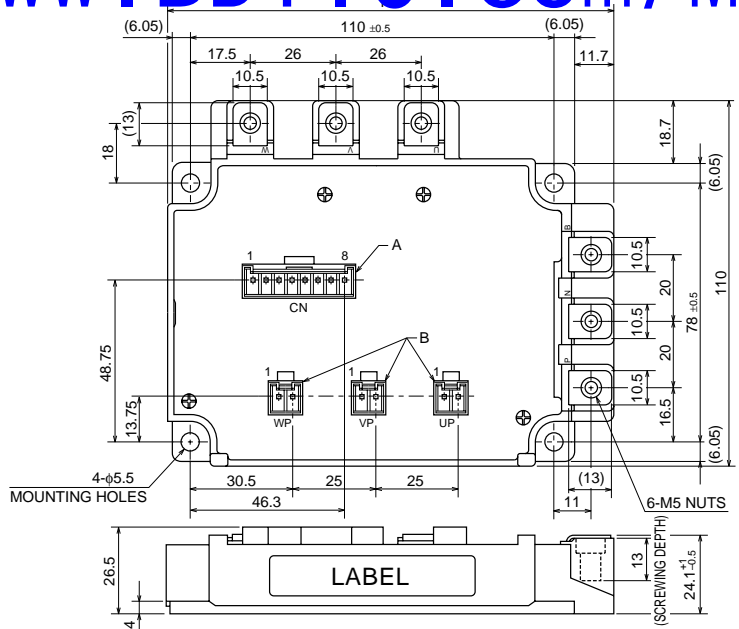

Housing Type of A and B  
 (J.S.T.Mfg.Co.Ltd)  
 A = B8P-VH-FB-B, B = B2P-VH-FB-B

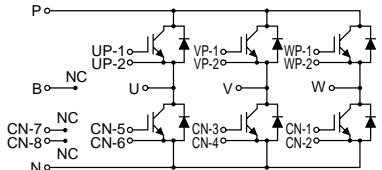

CIRCUIT DIAGRAM

CM200TL-12NF

HIGH POWER SWITCHING USE

ABSOLUTE MAXIMUM RATINGS (Tj = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V <sub>CE</sub>	Collector-emitter voltage	G-E Short	600	V
V <sub>GE</sub>	Gate-emitter voltage	C-E Short	±20	V
I <sub>C</sub>	Collector current	DC, T <sub>c</sub> = 88°C <sup>*1</sup>	200	A
I <sub>CM</sub>		Pulse (Note 2)	400	A
I <sub>E</sub> (Note 1)	Emitter current		200	A
I <sub>EM</sub> (Note 1)		Pulse (Note 2)	400	A
P <sub>C</sub> (Note 3)	Maximum collector dissipation	T <sub>c</sub> = 25°C	890	W
T <sub>j</sub>	Junction temperature		-40 ~ +150	°C
T <sub>stg</sub>	Storage temperature		-40 ~ +125	°C
V <sub>iso</sub>	Isolation voltage	Main Terminal to base plate, AC 1 min.	2500	V
—	Torque strength	Main Terminal M5	2.5 ~ 3.5	N • m
—		Mounting holes M5	2.5 ~ 3.5	N • m
—	Weight	Typical value	750	g

ELECTRICAL CHARACTERISTICS (Tj = 25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I <sub>CE</sub>	Collector cutoff current	V <sub>CE</sub> = V <sub>CE</sub> , V <sub>GE</sub> = 0V	—	—	1	mA
V <sub>GE(th)</sub>	Gate-emitter threshold voltage	I <sub>C</sub> = 20mA, V <sub>CE</sub> = 10V	6	7	8	V
I <sub>GES</sub>	Gate leakage current	V <sub>GE</sub> = V <sub>GES</sub> , V <sub>CE</sub> = 0V	—	—	0.5	µA
V <sub>CE(sat)</sub>	Collector-emitter saturation voltage	I <sub>C</sub> = 200A, V <sub>GE</sub> = 15V	—	1.7	2.2	V
C <sub>iss</sub>	Input capacitance	V <sub>CE</sub> = 10V	—	1.7	—	nF
C <sub>oss</sub>	Output capacitance	V <sub>CE</sub> = 10V, V <sub>GE</sub> = 0V	—	—	8.7	nF
C <sub>res</sub>	Reverse transfer capacitance	V <sub>CE</sub> = 10V, V <sub>GE</sub> = 0V	—	—	1.2	nF
Q <sub>G</sub>	Total gate charge	V <sub>CC</sub> = 300V, I <sub>C</sub> = 200A, V <sub>GE</sub> = 15V	—	800	—	nC
t <sub>d(on)</sub>	Turn-on delay time	V <sub>CC</sub> = 300V, I <sub>C</sub> = 200A	—	—	120	ns
t <sub>r</sub>	Turn-on rise time	V <sub>GE1</sub> = V <sub>GE2</sub> = 15V	—	—	100	ns
t <sub>d(off)</sub>	Turn-off delay time	R <sub>G</sub> = 3.1Ω, Inductive load switching operation	—	—	300	ns
t <sub>f</sub>	Turn-off fall time	I <sub>E</sub> = 200A	—	—	300	ns
t <sub>rr</sub> (Note 1)	Reverse recovery time		—	—	150	ns
Q <sub>rr</sub> (Note 1)	Reverse recovery charge		—	4.8	—	µC
V <sub>EC</sub> (Note 1)	Emitter-collector voltage	I <sub>E</sub> = 200A, V <sub>GE</sub> = 0V	—	—	2.8	V
R <sub>th(j-c)Q</sub>	Thermal resistance	IGBT part (1/6 module) <sup>*1</sup>	—	—	0.14	°C/W
R <sub>th(j-c)R</sub>		FWDi part (1/6 module) <sup>*1</sup>	—	—	0.22	°C/W
R <sub>th(c-f)</sub>	Contact thermal resistance	Case to fin, Thermal compound Applied (1/6 module) <sup>*2</sup>	—	0.051	—	°C/W
R <sub>G</sub>	External gate resistance		3.1	—	31	Ω

\*1 : To measured point is just under the chips.

If you use this value, R<sub>th(f-a)</sub> should be measured just under the chips.

\*2 : Typical value is measured by using Shin-etsu Silicone "G-746".

Note 1. I<sub>E</sub>, V<sub>EC</sub>, t<sub>rr</sub> & Q<sub>rr</sub> represent characteristics of the anti-parallel, emitter to collector free-wheel diode (FWDi).

2. Pulse width and repetition rate should be such that the device junction temp. (T<sub>j</sub>) does not exceed T<sub>jmax</sub> rating.

3. Junction temperature (T<sub>j</sub>) should not increase beyond 150°C.


4. Pulse width and repetition rate should be such as to cause negligible temperature rise.

# CM200TL-12NF


HIGH POWER SWITCHING USE

## PERFORMANCE CURVES


**OUTPUT CHARACTERISTICS (TYPICAL)**

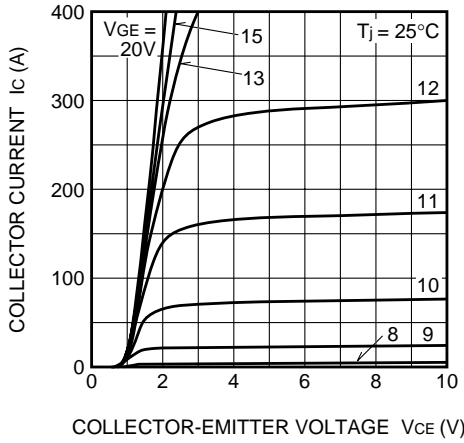


**COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)**

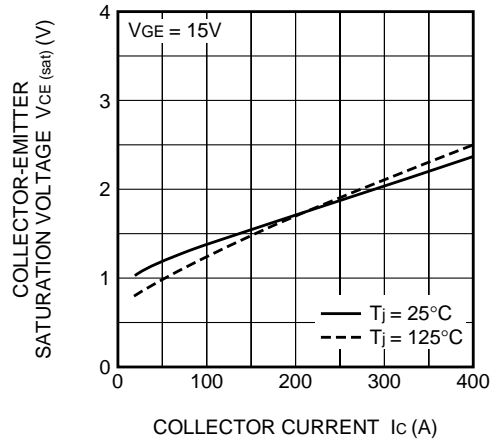

**COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)**

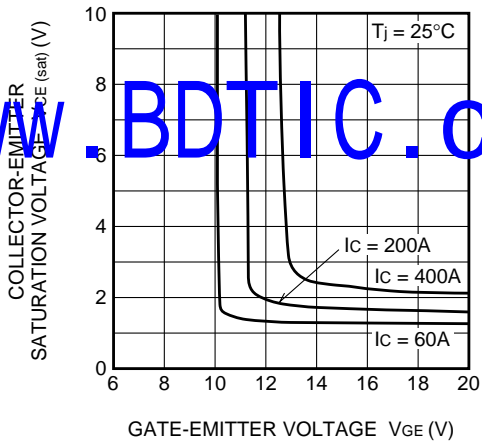


**FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)**

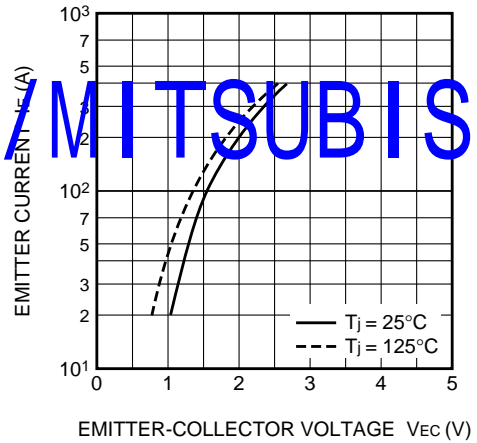


www.BDTIC.com/MITSUBISHI


**CAPACITANCE-VCE CHARACTERISTICS (TYPICAL)**

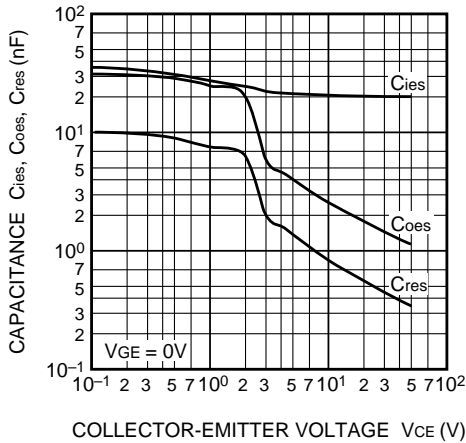


**HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)**

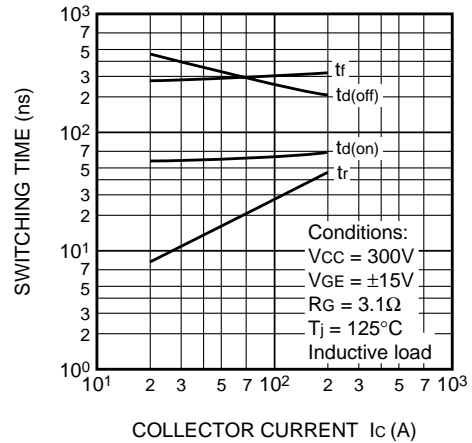


REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

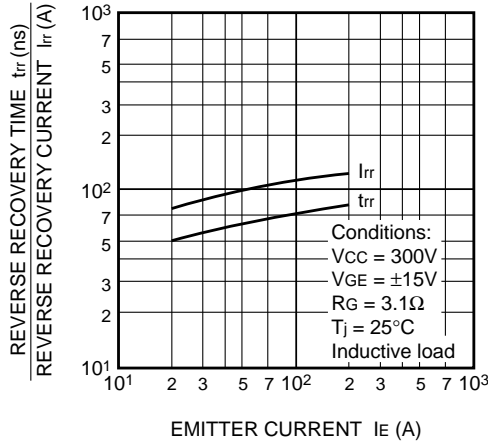


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT part & FWDi part)

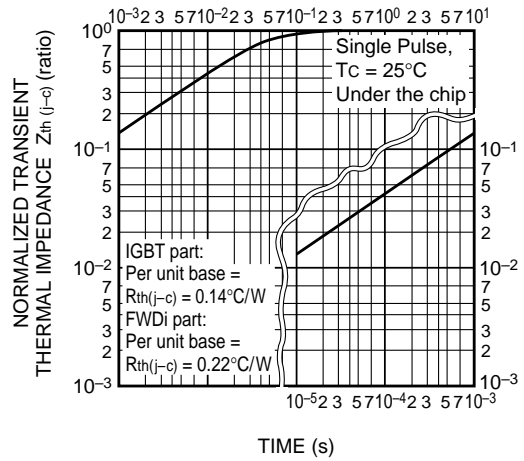


SWITCHING LOSS vs. COLLECTOR CURRENT (TYPICAL)

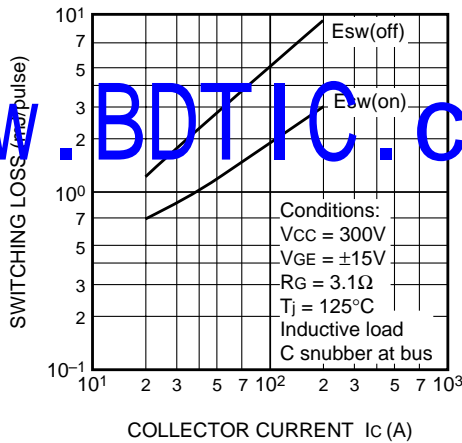


SWITCHING LOSS vs. GATE RESISTANCE (TYPICAL)

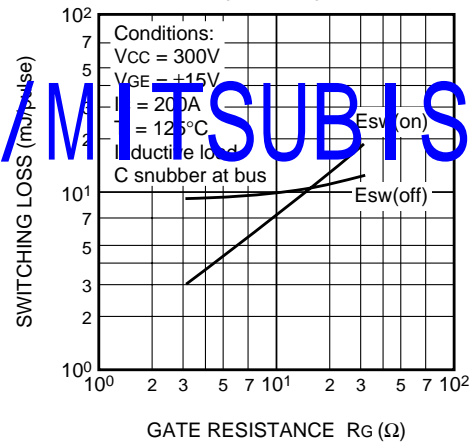


RECOVERY LOSS vs. IE (TYPICAL)

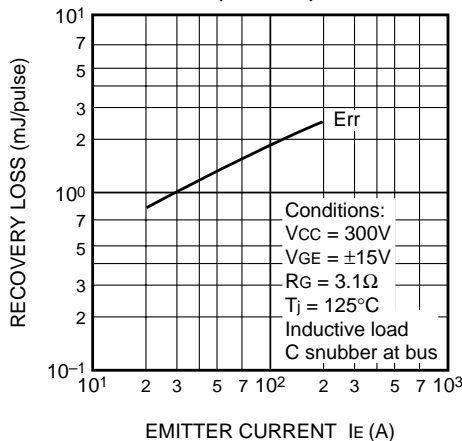

RECOVERY LOSS vs. GATE RESISTANCE (TYPICAL)

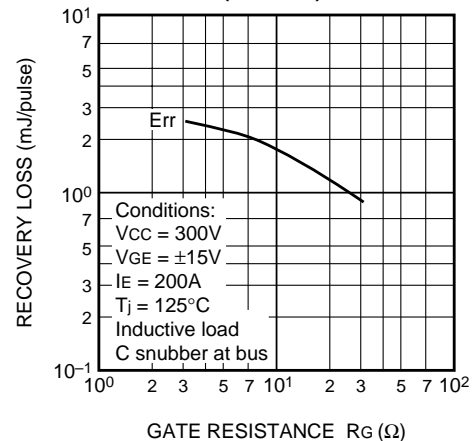

www.BDTIC.com/MITSUBISHI

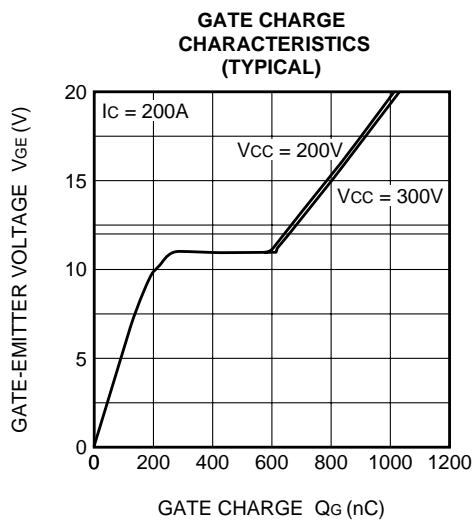

[www.BDTIC.com/MITSUBISHI](http://www.BDTIC.com/MITSUBISHI)