

< High-power GaAs FET (small signal gain stage) >

MGF0912A

L & S BAND / 14W

non - matched

DESCRIPTION

The MGF0912A, GaAs FET with an N-channel schottky gate, is designed for use in L/S band amplifiers.

FEATURES

- High output power
Po=41.5dBm(TYP.) @f=1.9GHz,Pin=33dBm
- High power gain
Gp=10.5dB(TYP.) @f=1.9GHz
- High power added efficiency
P.A.E =38%(TYP.) @f=1.9GHz,Pin=33dBm
- Hermetic Package

APPLICATION

- For L/S Band power amplifiers

QUALITY

- GG

Delivery

- Tray

RECOMMENDED BIAS CONDITIONS

- Vds=10V • Ids=2.6A • Rg=50Ω

Absolute maximum ratings (Ta=25°C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain voltage	-15	V
VGSO	Gate to source voltage	-15	V
ID	Drain current	10	A
IGR	Reverse gate current	-30	mA
IGF	Forward gate current	63	mA
PT*1	Total power dissipation	53.6	W
Tch	Channel temperature	175	°C
Tstg	Storage temperature	-65 to +175	°C


*1:Tc=25°C

Electrical characteristics (Ta=25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IDSS	Saturated drain current	VDS=3V,VGS=0V	-	-	10	A
gm	Transconductance	VDS=3V,ID=2.6A	-	3	-	S
VGS(off)	Gate to source cut-off voltage	VDS=3V,ID=20mA	-2	-	-5	V
Po	Output power	VDS=10V,ID(RF off)=2.6A	40.5	41.5	-	dBm
P.A.E.	Power added efficiency	f=1.9GHz,Pin=33dBm	-	38	-	%
GLP	Linear Power Gain	VDS=10V,ID(RF off)=2.6A,f=1.9GHz	9.5	10.5	-	dB
Rth(ch-c) *3	Thermal resistance	Δ Vf method	-	-	100	°C/W

*2 :Channel-case

*3 :Channel-ambient

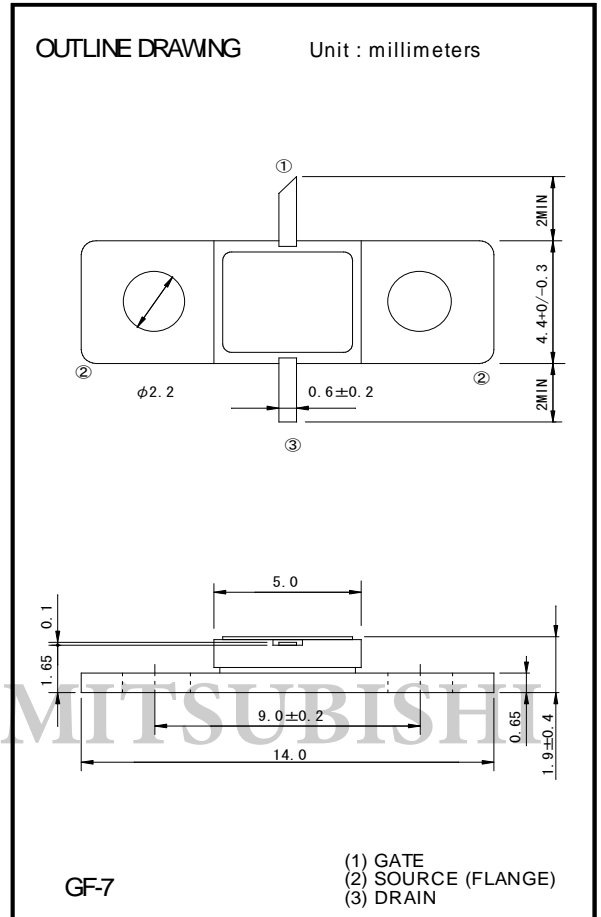



< High-power GaAs FET (small signal gain stage) >

MGF0912A

L & S BAND / 14W

non - matched

MGF0912 TYPICAL CHARACTERISTICS (Ta=25deg.C)

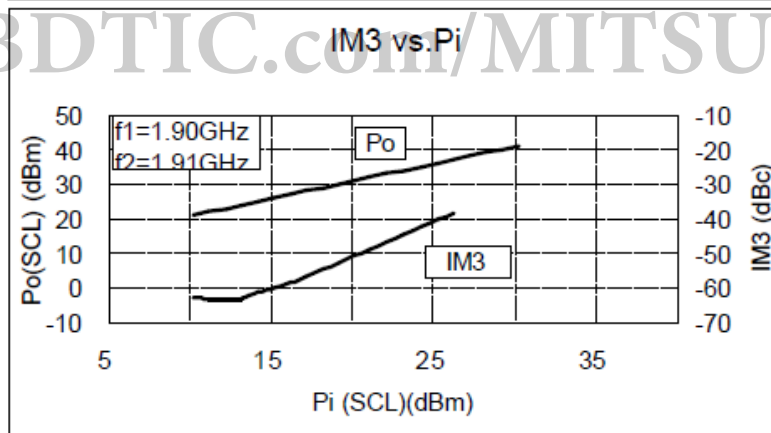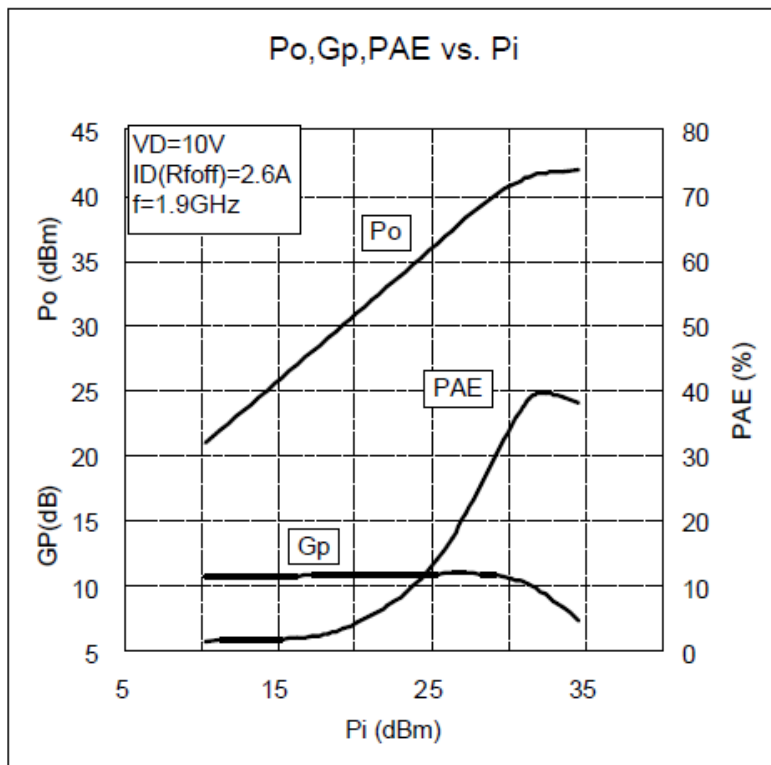

MGF0912A S-parameters (Ta=25deg.C, VDS=10(V), IDS=2.6(A))

freq (MHz)	S11		S21		S12		S22		K	MAG/MSG (dB)
	MAG	Ang(deg)	MAG	Ang(deg)	MAG	Ang(deg)	MAG	Ang(deg)		
600	0.973	-169.11	1.885	88.28	0.008	56.40	0.889	177.56	0.99	23.59
800	0.973	-173.29	1.481	83.73	0.009	56.96	0.889	176.12	1.05	20.56
1000	0.972	-176.33	1.183	79.70	0.010	57.05	0.888	174.92	1.13	18.47
1200	0.972	-178.59	0.968	76.03	0.011	56.95	0.887	173.85	1.22	16.75
1400	0.971	179.63	0.818	72.61	0.011	56.87	0.885	172.81	1.31	15.30
1600	0.970	178.09	0.717	69.30	0.012	56.93	0.884	171.72	1.39	14.12
1800	0.969	176.58	0.650	66.02	0.013	57.20	0.882	170.52	1.45	13.16
2000	0.968	174.95	0.606	62.68	0.014	57.66	0.881	169.15	1.47	12.38
2200	0.967	173.08	0.574	59.21	0.015	58.24	0.880	167.56	1.46	11.70
2400	0.966	170.91	0.548	55.57	0.017	58.78	0.878	165.75	1.45	11.05
2600	0.965	168.42	0.521	51.73	0.020	59.06	0.877	163.68	1.42	10.39
2800	0.964	165.64	0.493	47.66	0.022	58.77	0.876	161.38	1.40	9.68
3000	0.963	162.65	0.461	43.37	0.025	57.56	0.875	158.86	1.38	8.94

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.MitsubishiElectric.com/>).

- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.