


Features

- LO 2 TO 24 GHz
- RF 2 TO 24 GHz
- IF 1 TO 15 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- HIGH COMPRESSION POINT

Description

The M51 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

Product Image

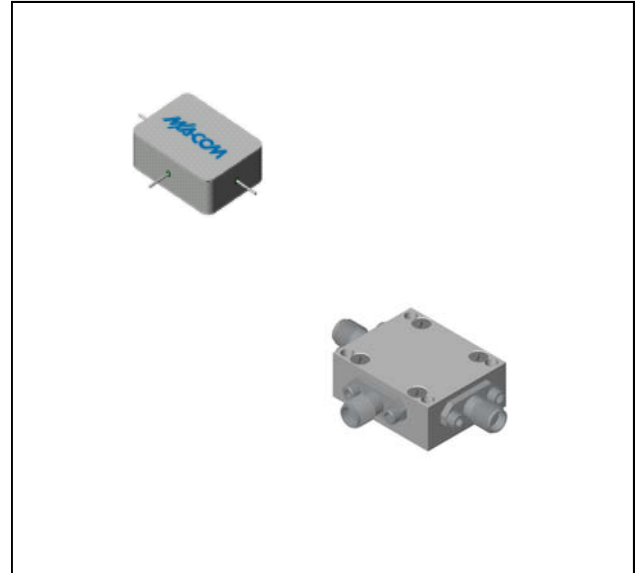

Ordering Information

Part Number	Package
M51	Minpac
M51C	SMA Connectorized




Electrical Specifications: $Z_0 = 50\Omega$ $L_o = +10$ dBm (Downconverter application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C *
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 2.5 to 18 GHz, fL = 2 to 18 GHz, fI = 2 to 10 GHz	dB	7.5	9.5	10.0
	fR = 2 to 18 GHz, fL = 2 to 24 GHz, fI = 1 to 12 GHz	dB	8.0	10.5	11.0
	fR = 2 to 24 GHz, fL = 2 to 24 GHz, fI = 1 to 12 GHz fI = 1 - 15 GHz fL < fR	dB	9.0	11.5	12.0
Isolation, L to R (min)	fL = 2 to 3 GHz	dB	20	15	13
	fL = 3 to 24 GHz	dB	30	20	18
Isolation, L to I (min)	fL = 2 to 7 GHz	dB	30	20	18
	fL = 7 to 24 GHz	dB	22	15	13
1 dB Conversion Comp.	fL @ +10 dBm	dBm	+5		
Input IP3	fR1 = 5 GHz @ -6 dBm, fR2 = 5.01 GHz @ -6 dBm, fL = 8 GHz @ 10 dBm	dBm	+15		
	fR1 = 16 GHz @ -6 dBm, fR2 = 16.01 GHz @ -6 dBm, fL = 18 GHz @ 10 dBm	dBm	+15		


* The M51C specification limits apply at 0°C to +50°C.

Typical Performance Curves



Conversion Loss vs. Frequency
LO @ +10 dBm

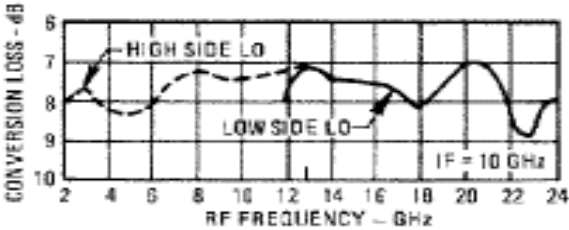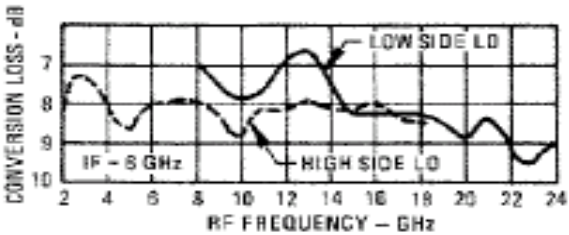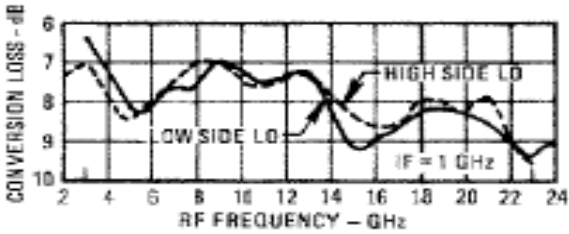


Drive Level

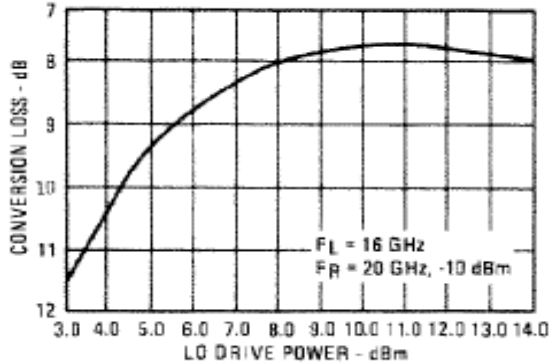



Isolation vs. Frequency

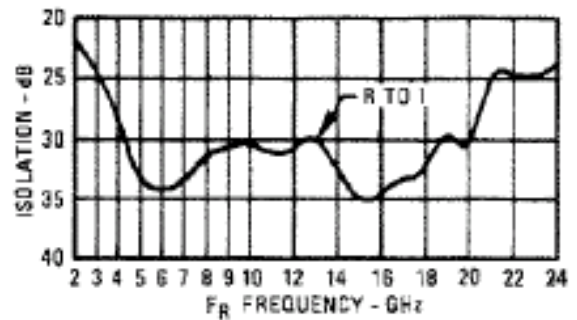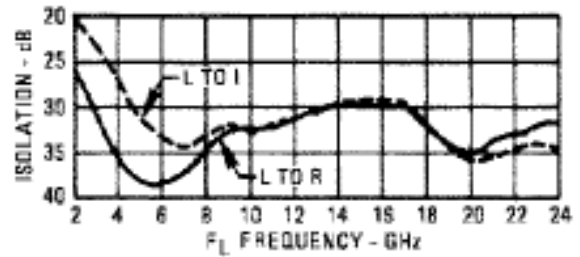

L-Port VSWR

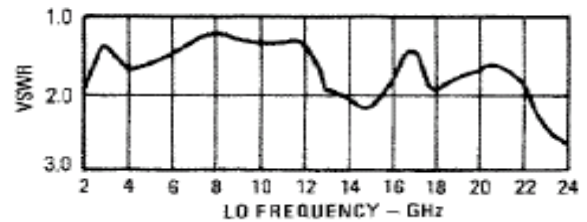

R-Port VSWR

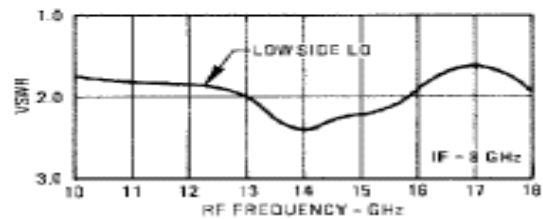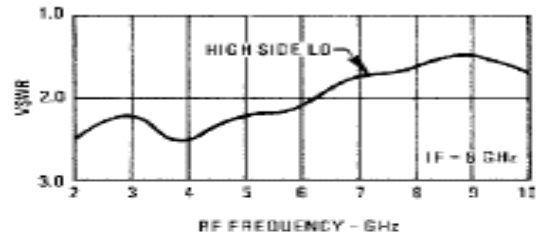

M51 / M51C


Triple-Balanced Mixer

Rev. V3


Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+26 dBm max @ +25°C +22 dBm max @ +100°C
Peak Input Current	mA DC

Outline Drawing: Minpac *



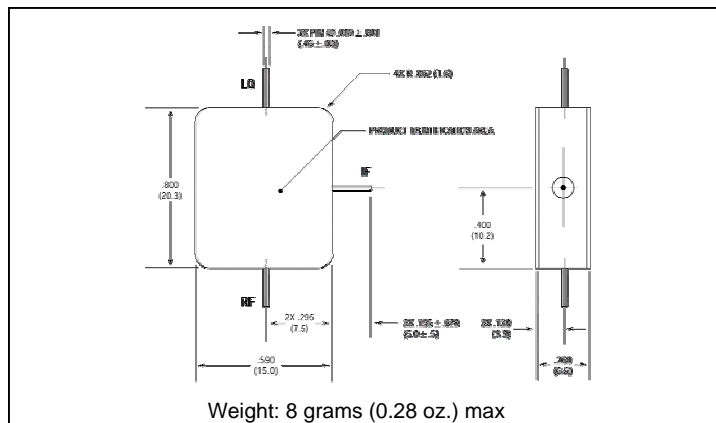


Outline Drawing: SMA Connectorized *


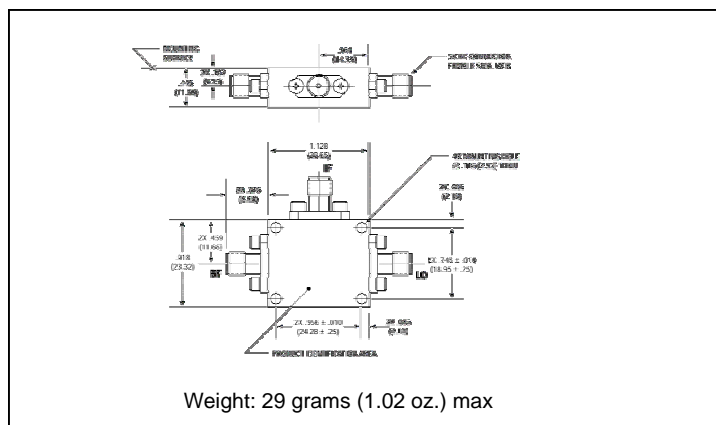


* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.

I-Port VSWR

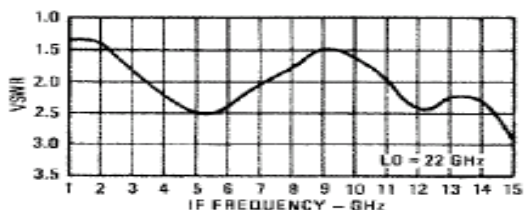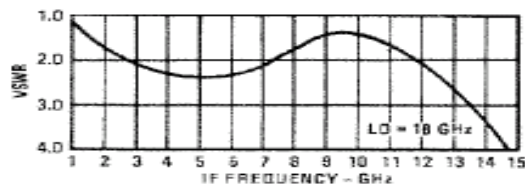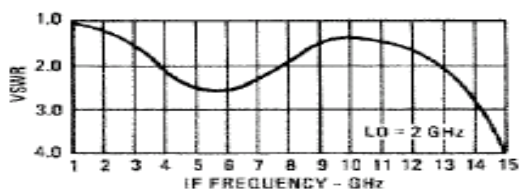

R-Port VSWR

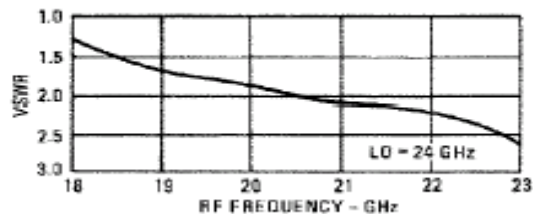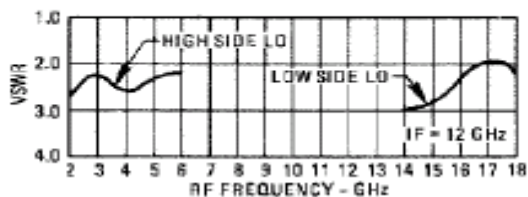

R-Port VSWR LO @ +10 dBm

