

M67 / M67C

Double-Balanced Mixer

Rev. V3


Features

- LO 7 TO 17 GHz
- RF 9 TO 15 GHz
- IF DC TO 2.5 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- LOW NOISE FIGURE: 6.5 dB (TYP.)

Description

The M67 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Product Image

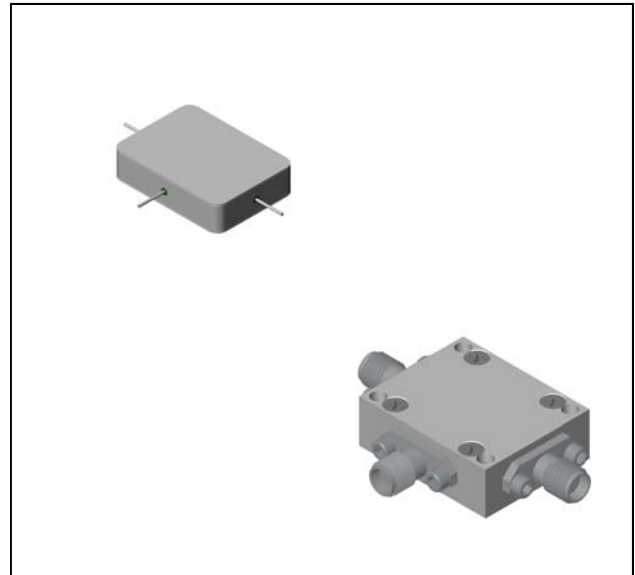

Ordering Information


Part Number	Package
M67	Minpac
M67C	SMA Connectorized

Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +10$ dBm (Downconverter application only)


Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C
SSB Conversion Loss (max) & SSB Noise Figure (max)	$f_R = 9.5$ to 13 GHz, $f_L = 9$ to 13.5 GHz, $f_I = 30$ to 500 GHz	dB	5.5	7.0	7.5
	$f_R = 9$ to 15 GHz, $f_L = 8$ to 16 GHz, $f_I = 30$ to 1000 GHz	dB	6.5	8.5	9.0
	$f_R = 9$ to 15 GHz, $f_L = 7$ to 17 GHz, $f_I = 30$ to 2000 GHz	dB	6.5	9.0	9.5
	$f_R = 9.5$ to 13.5 GHz, $f_L = 7$ to 16 GHz, $f_I = 30$ to 2500 GHz	dB	6.5	9.0	9.5
Isolation, L to R (min)	$f_L = 7$ to 15 GHz	dB	40	22	20
	$f_L = 15$ to 17 GHz	dB	30	10	8
Isolation, L to I (min)	$f_L = 7$ to 17 GHz	dB	25	15	13
1 dB Conversion Comp.	$f_L = +10$ dBm	dBm	+4		
Input IP3	$f_{R1}=11.5$ GHz at -6 dBm, $f_{R2}=11.5$ GHz at -6 dBm, $f_L = 12$ GHz at $+10$ dBm	dBm	+11		

Typical Performance Curves


Conversion Loss vs. LO Drive

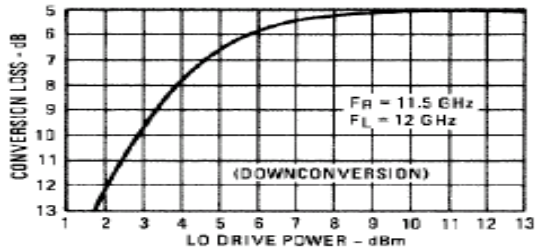



Conversion Loss vs. RF Input Power

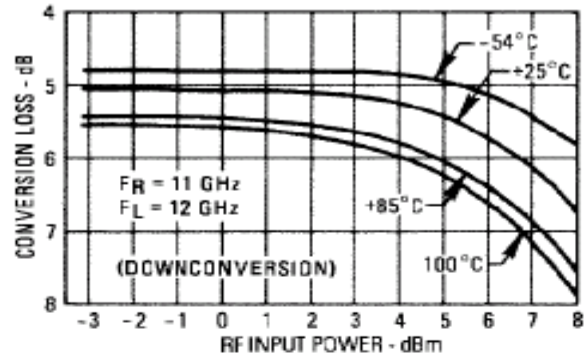


Conversion Loss vs. Frequency

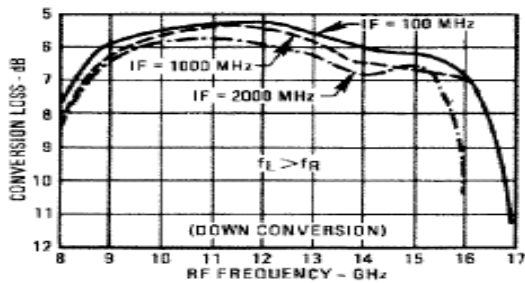


Isolation vs. Frequency

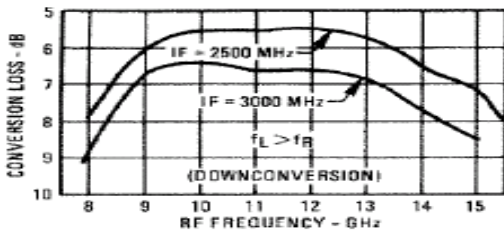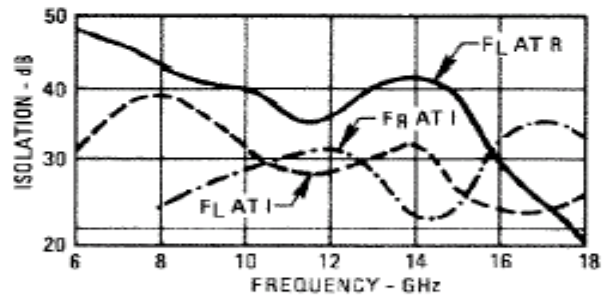

L-Port VSWR vs. Frequency

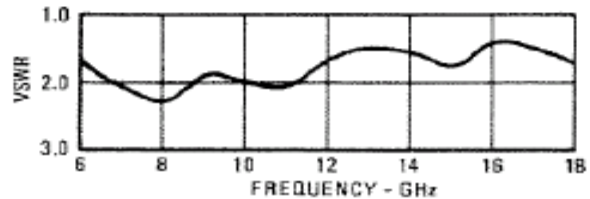

Conversion Loss vs. Output Frequency

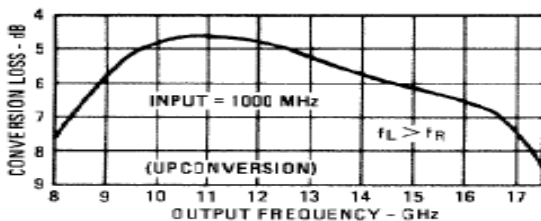

M67 / M67C


Double-Balanced Mixer

Rev. V3



Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+23 dBm max @ +25°C +20 dBm max @ +100°C
Peak Input Current	50 mA DC


R-Port VSWR vs. Frequency

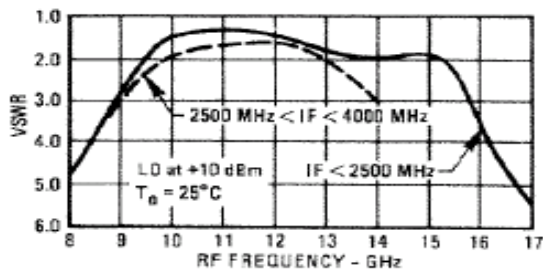


I-Port VSWR vs. f_L

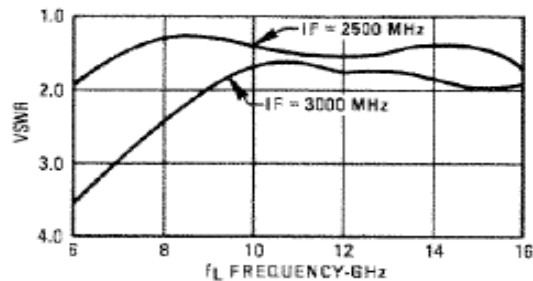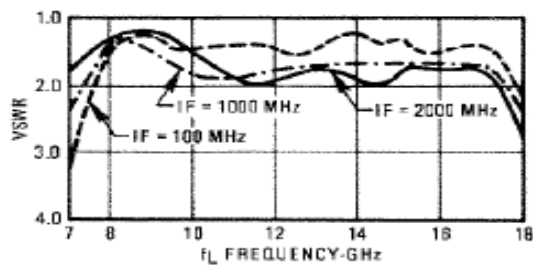

Outline Drawing: Minpac *

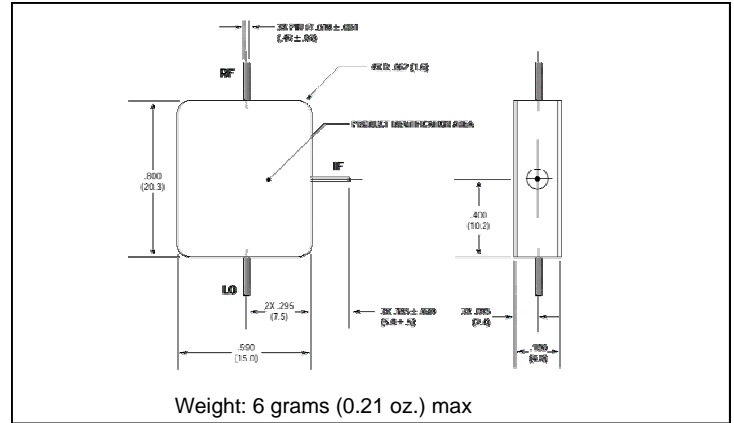

Outline Drawing: SMA Connectorized *

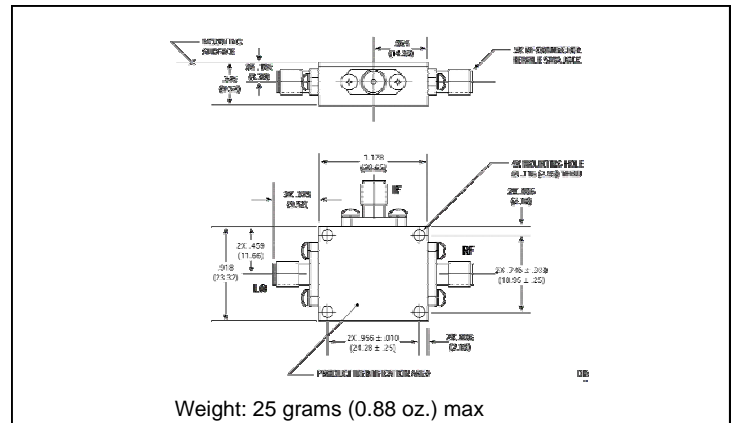

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc and its affiliates reserve the right to make changes to the products or information contained herein without notice.