

Features

- + 18 dBm Typical Input IP3
- 8.3 dB Typical Conversion Loss
- + 5 to + 9 dBm LO Drive
- Fully Balanced Passive Mixer
- NO External Matching Required
- Low Cost Miniature Plastic MLP Package
- RoHS* Compliant with 260 °C Reflow Capability
- 100 % MATTE Tin Plating

Description and Applications


M/A-COM's MA4EXP240L-1277 is a silicon monolithic 2300-2800 MHz, low barrier, double balanced mixer in a low cost, miniature surface mount FQFP-N 3mm Square, 16 lead plastic package. The die uses M/A-COM's unique HMIC silicon/glass process to realize low loss passive elements while retaining the advantages of low barrier silicon schottky barrier diodes to produce a compact device.

These mixers are well suited for applications where small size and high performance are required. Typical applications include frequency conversion, modulation, and demodulation in wireless receivers and transmitters.

Ordering Information

Part Number	Package
MA4EXP240L-1277T	Tape and Reel

MLP 3mm Package (Circuit Side View)

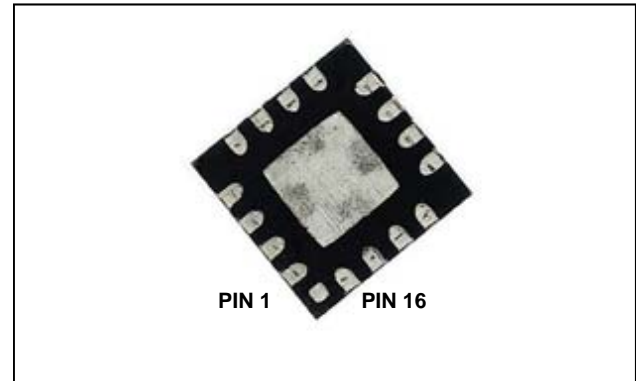

PIN Configuration¹

PIN	Function	PIN	Function
1	N/C	9	N/C
2	N/C	10	RF
3	LO	11	N/C
4	N/C	12	N/C
5	N/C	13	N/C
6	N/C	14	IF
7	N/C	15	N/C
8	N/C	16	N/C

1. Package bottom is electrical ground

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

MA4EXP240L-1277



Silicon Double Balanced HMIC Mixer
2300 - 2800 MHz


Rev. V3

Electrical Specifications @ +25 °C


Parameter	Frequency Range	Test Conditions	Units	Min.	Avg.	Max.
Conversion Loss	2500 MHz 2300-2800 MHz	LO Drive = +7 dBm RF = -10 dBm, IF = 60 MHz	dB	- -	8.3 8.5	9.8 10.5
L - R Isolation	2500 MHz 2300-2800 MHz	LO Drive = +7 dBm RF Level = -10 dBm	dB	- -	51.0 51.0	- -
L - I Isolation	2500 MHz 2300-2800 MHz	LO Drive = +7 dBm RF Level = -10 dBm	dB	- -	42.0 39.0	- -
R - I Isolation	2500 MHz 2300-2800 MHz	LO Drive = +7 dBm RF Level = -10 dBm	dB	- -	23.0 23.0	- -
LO VSWR	2500 MHz 2300-2800 MHz	LO Drive = +7 dBm RF Level = -10 dBm	Ratio		2.0:1 1.9:1	
RF VSWR	2500 MHz 2300-2800 MHz	LO Drive = +7 dBm RF Level = -10 dBm	Ratio	- -	1.6:1 1.7:1	- -
IF VSWR	DC - 200 MHz	LO Drive = +7 dBm RF Level = -10 dBm	Ratio	- -	1.5:1 -	- -
Input IP3	2500 MHz 2300-2800 MHz	LO Drive = +7 dBm RF = -10 dBm, IF = 60 MHz	dBm	15 -	18.4 20.3	- -
Input 1 dB Compression	2500 MHz 2300-2800 MHz	LO Drive = +7 dBm IF = 60 MHz	dBm	- -	4.8 4.9	- -

Typical Performance Curves (LO Drive = +5/+7/+9 dBm, RF = -10 dBm, IF = 60 MHz)

Conversion Loss

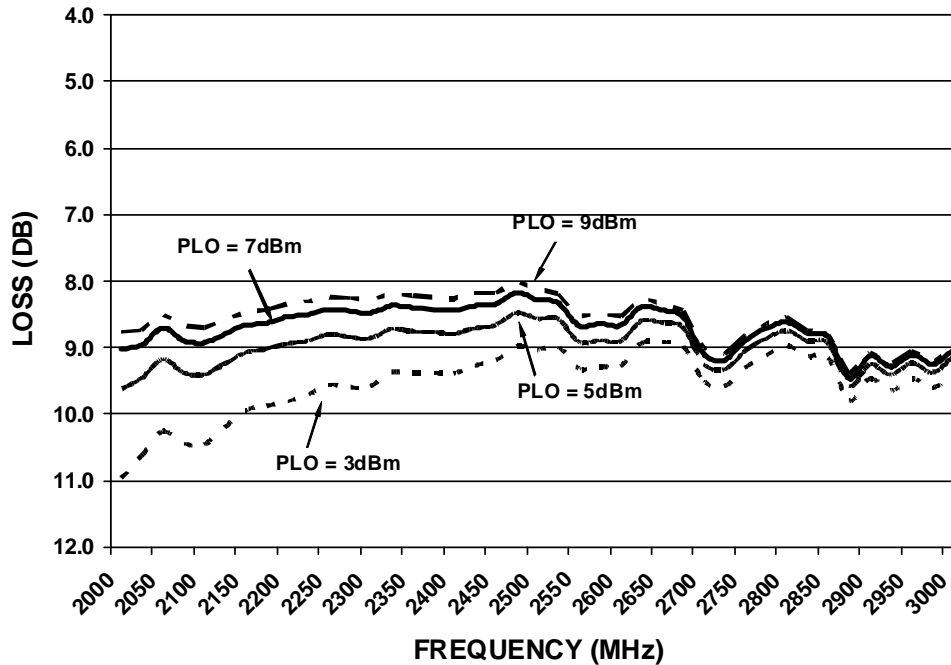

Input IP3

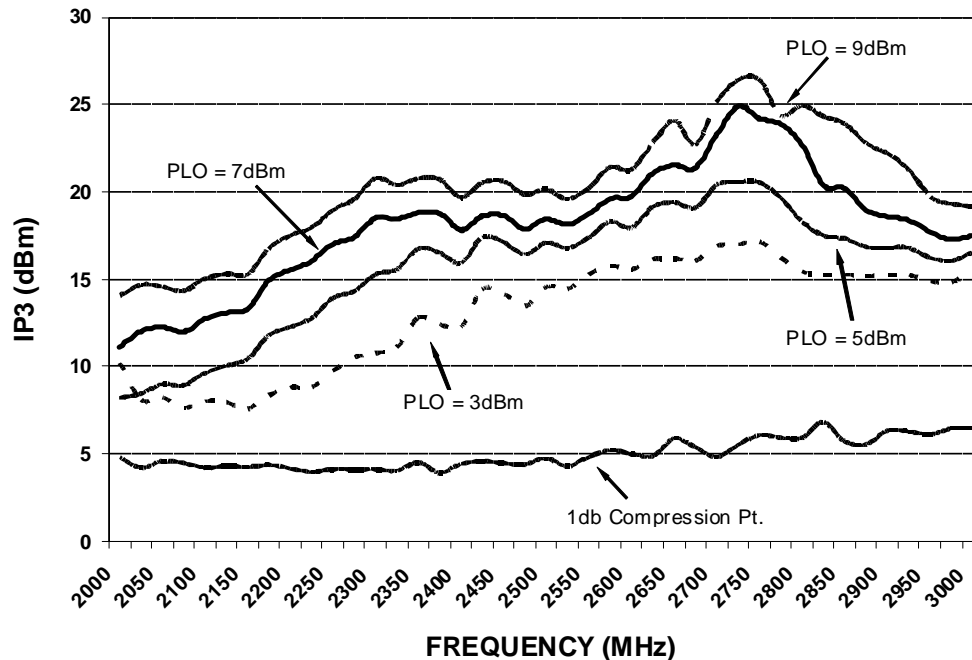

MA4EXP240L-1277




Silicon Double Balanced HMIC Mixer
2300 - 2800 MHz


Rev. V3

Typical Performance Curves (LO Drive = +5/+7/+9 dBm, RF = -10 dBm, IF = 60 MHz)

Isolation (LO Drive= +7dbm, RF= -10dBm)

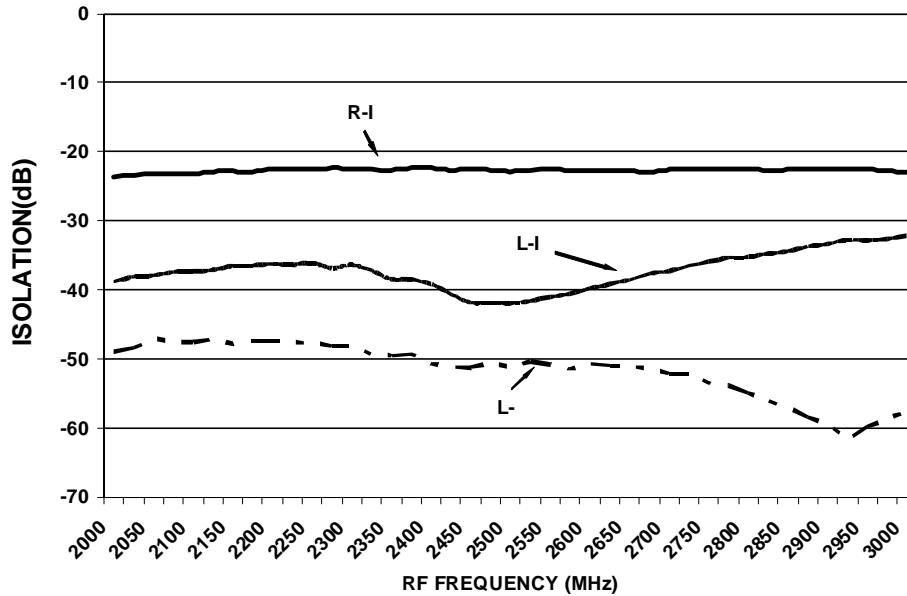

VSWR (LO Drive= +7dbm, RF= -10dBm, IF=-10dBm)

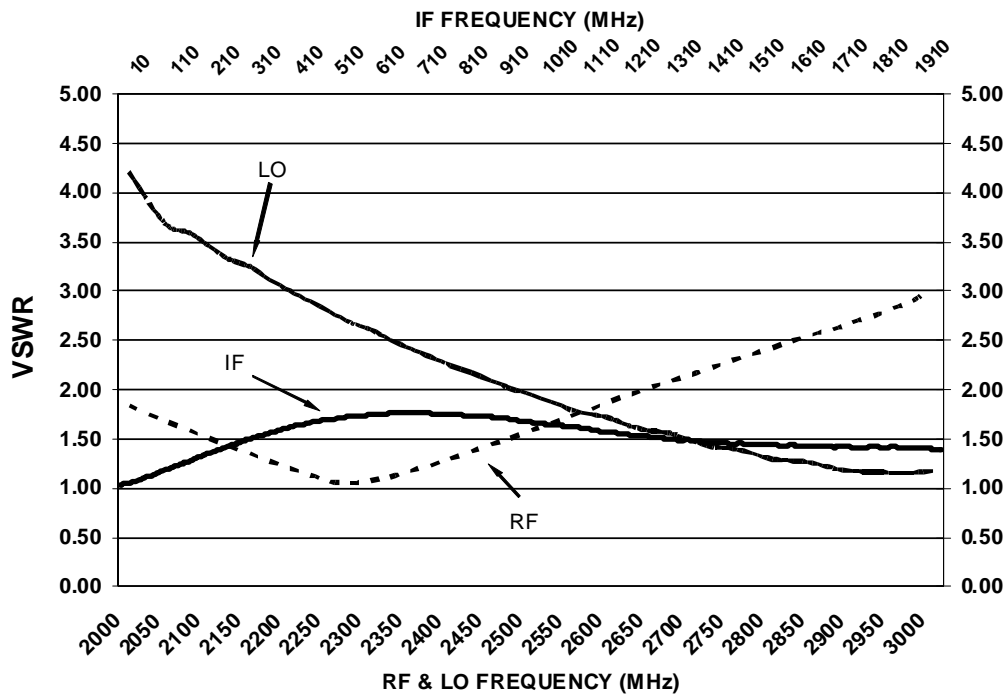

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

MA4EXP240L-1277

Silicon Double Balanced HMIC Mixer
2300 - 2800 MHz


Rev. V3

Absolute Maximum Ratings¹

Parameter	Maximum Ratings
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C
Incident LO Power	+20 dBm C.W.
Incident RF Power	+20 dBm C.W.
Soldering Temperature	+260 °C max

1. Exceeding these limits may cause permanent damage.

Mixer Schematic

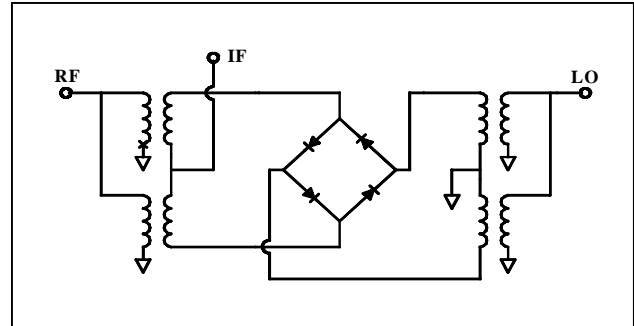

MA4EXP240L-1277

Silicon Double Balanced HMIC Mixer
2300 - 2800 MHz

Rev. V3

MA4EXP240L-1277 Outline – 3mm FQFP-N 16 Lead Saw Singulated

