

1:1 Transformer with tap
50-870MHz


MABA-008184-CT1760
V1

Features

- Surface Mount
- 1:1 Impedance
- 260°C Reflow Compatible
- RoHS* Compliant
- RoHS version of ET1-1-75-3
- Available on Tape and Reel. Reel quantity 900

Description


M/A-COM's MABA-008184-CT1760 is a 1:1 Transformer with tap in a low cost, surface mount package. Ideally suited for high volume CATV/ Broadband applications.




Pin Configuration

Pin No.	Function
1	Input
2	Output Coupled Leg
3	Output Thru Leg
4	Ground

Schematic

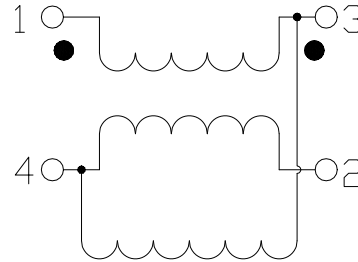

Case Style: SM-118A

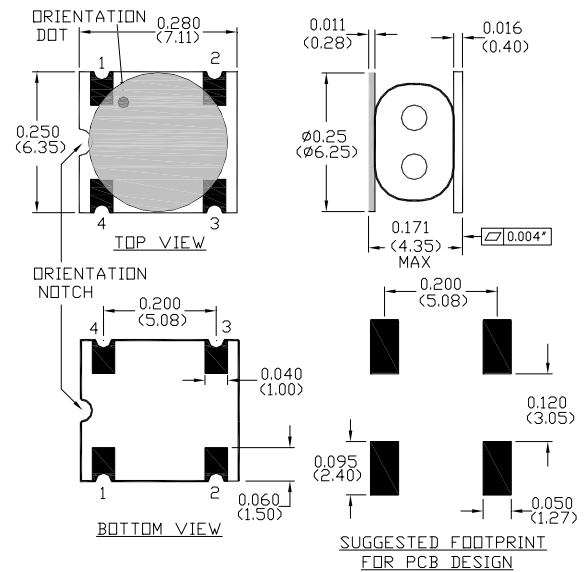

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

Note: SM-118-A incorporates the plastic disk & also has the dot removed from the bottom of the PCB

Ordering Information

Part Number	Package
MABA-008184-CT1760	900
MABA-008184-CT17TB	Customer Test Board

Note: Reference Application Note **M513** for reel size information.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

1:1 Transformer with tap
50-870MHz

MABA-008184-CT1760
V1

Electrical Specifications: $T_A = 25^\circ\text{C}$, Power Level = 0dBm, $Z_0 = 75\Omega$ ¹


Parameter	Frequency	Units	Min	Typ	Max
Insertion Loss Pin 1 - 2 (Coupled)	50 MHz	dB	-	0.43	0.83
	870 MHz	dB	-	0.23	0.43
Insertion Loss Pin 1 - 3 (Thru)	50 MHz	dB	-	0.23	0.43
	870 MHz	dB	-	0.73	1.3
Amplitude Imbalance	50 MHz	dB	-0.6	0.2	0.6
	870 MHz	dB	-0.73	0.4	0.73
Phase Imbalance	50 - 870 MHz	°	-3.23	1.2	3.23
Input Return Loss Pin 4	50 - 870 MHz	dB	18	22	-

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	250mW
DC current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

Recommended PCB Configuration

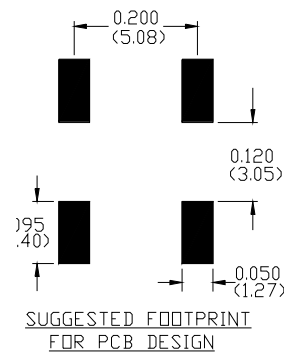

2

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
 • India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588






Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

1:1 Transformer with tap
50-870MHz

MABA-008184-CT1760
V1

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹

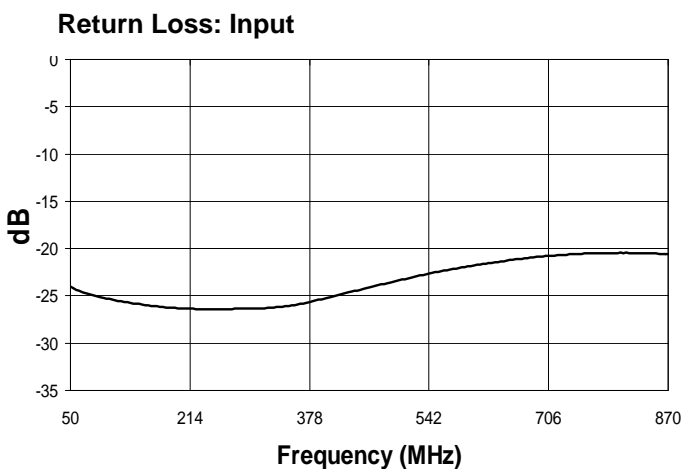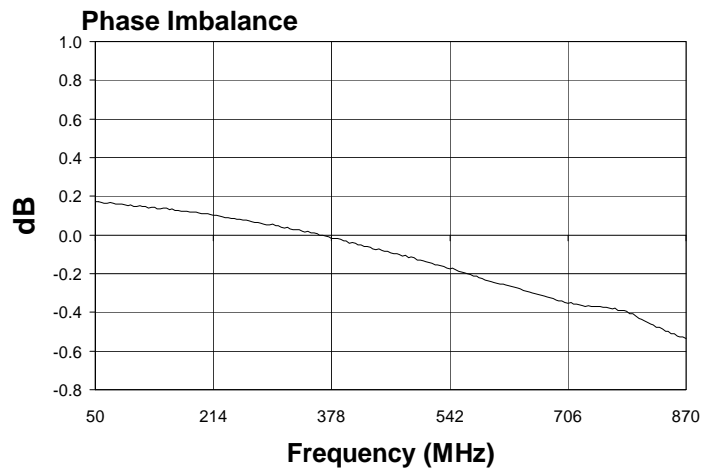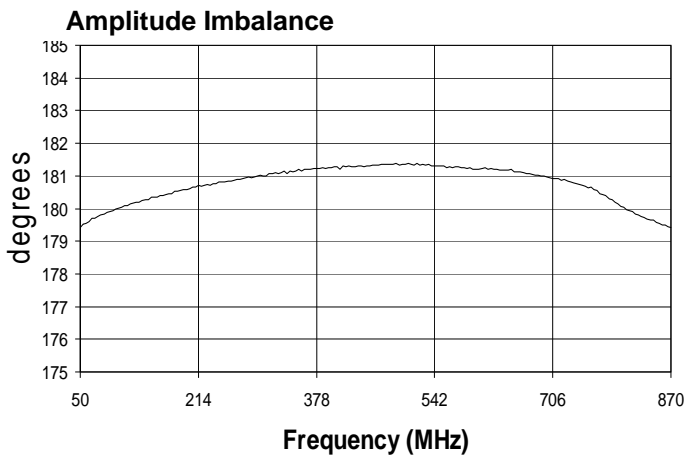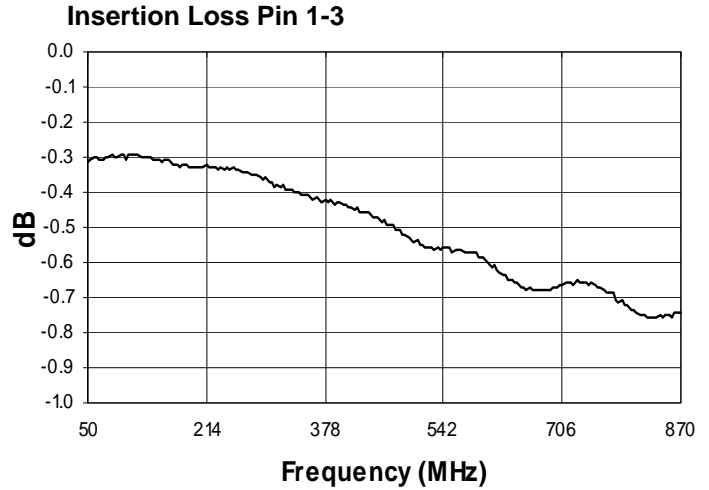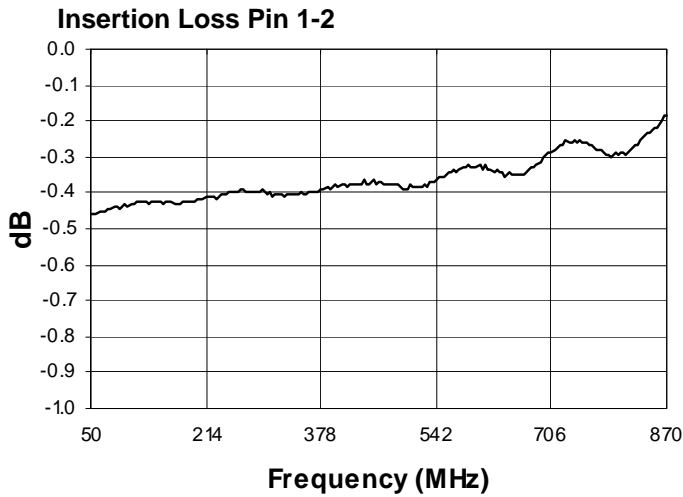

3

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.