

## **RF 1:2 Transmission Line Transformer** 1-1600 MHz


Rev. V3

#### **Features**

- Surface mount
- 1:2 impedance
- RoHS\* Compliant
- 260°C reflow compatible
- Tape and Reel Package

## Description

M/A-COM's MABA-010247-2R1250 is a RoHS compliant 1:2 RF transmission line transformer in a low cost, surface mount package. The windings of the MABA-010247-2R1250 are welded to the package substrate for improved reliability and to eliminate lead content. Ideally suited for high volume cellular and wireless application. Parts are packaged in tape & reel.



## **Product Image**





## **Pin Configuration**


Pin No.	Function
1	Secondary
2	GND
3	Secondary Dot
4	Primary Dot (Input)
5	Primary (GND)


### SM-197 package

**Schematic** 









Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
  - China Tel: +86.21.2407.1588
- India Tel: +91.80.43537383 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

<sup>\*</sup> Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.



# RF 1:2 Transmission Line Transformer 1-1600 MHz

Rev. V3

## Electrical Specifications: $T_A = 25$ °C, $Z_0 = 50\Omega$

Parameter	Test Conditions	Test Conditions	Units	Min	Тур	Max
RF Frequency	-	1 - 1600	MHz	-	-	-
Insertion Loss	-	1 - 750 750 - 1250 1250 -1600	dB dB dB	- - -	1.0 1.5 2.0	2.5 4.0
Input Return Loss	-	1 - 500 500 - 1600	dB dB	20 10	30 15	-
Amplitude Unbalance	-	1 - 1250 1250 - 1600	dB dB	-	0.5 1.0	1.0 1.2
Phase Unbalance	-	1 - 1600	Degrees	-	5	10

## Absolute Maximum Ratings 1,2

Parameter	Absolute Maximum
DC Power	250 mW
DC Current	50 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

<sup>1.</sup> Exceeding any one or combination of these limits may cause permanent damage to this device.

M/A-COM does not recommend sustained operation near these survivability limits.

India Tel: +91.80.43537383
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.




## **RF 1:2 Transmission Line Transformer** 1-1600 MHz


Rev. V3

## **Typical Performance Curves**


#### **Insertion Loss**

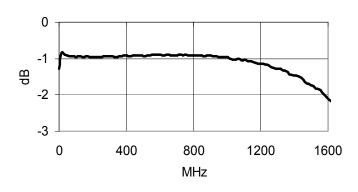


#### Amplitude Unbalance



#### Phase Unbalance

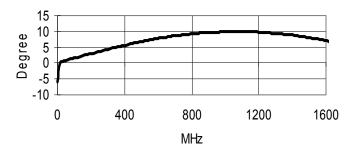

#### Input Return Loss



- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.43537383
- China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.



# RF 1:2 Transmission Line Transformer 1-1600 MHz

Rev. V3

### **Tape & Reel Information**

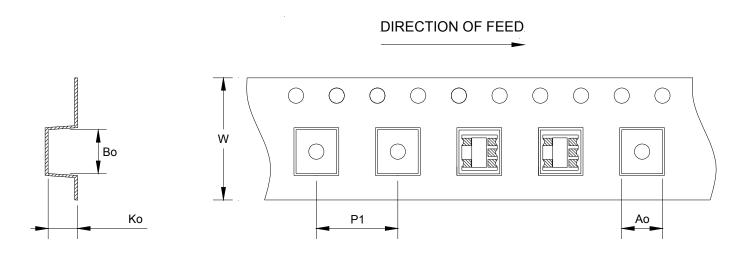

Item	Dimension
Ao	4.55mm +/-0.1mm
Во	4.75mm +/-0.1mm
Ko	3.10mm +/-0.1mm
W	12.00mm +/-0.3mm
P1	8.00mm +/-0.1mm

#### **Ordering Information**

Part Number	Package
MABA-010247-2R1250	Tape and Reel (2000 piece Reel)

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.43537383
   China Tel: +86.21.2407.1588
   Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.