

# RoHS Compliant



## 17dB Broadband CATV, Coupler 5-1200MHz


MACP-007741-CG09E0  
V2

### Features


- Surface Mount
- Typical Coupling 17dB
- RoHS\* Compliant
- RoHS version of EMDC-17-1-75
- 260°C Reflow Compatible
- Available on Tape and Reel, reel qty. 2000

### Description


M/A-COM's MACP-007741-CG09E0 is a high performance 75 Ohm Coupler, in a SM-22 low cost, surface mount package. The MACP-007741-CG09E0 is designed for use in high volume CATV applications. Typical applications include Set-top Boxes, Network Interface Units, Broadband Amplifiers and Headend equipment.



### Schematic

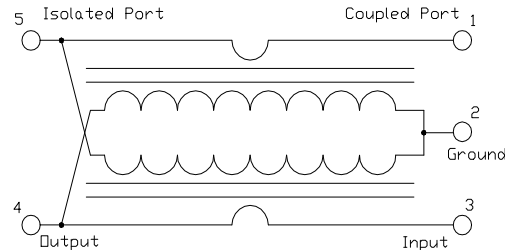

### Case Style:

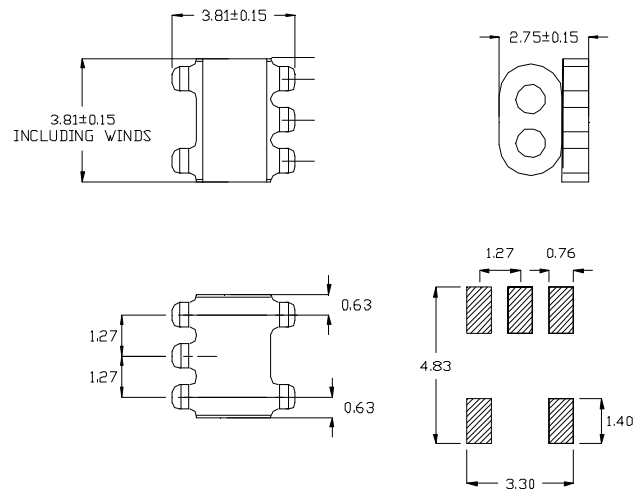

### Pin Configuration

Pin No.	Function
1	Coupled
2	Ground
3	Input
4	Output
5	Isolated (external 75 Ohms termination)

Note: Reference Application Note **M513** for reel size information.

### Ordering Information

Part Number	Package
MACP-007741-CG09E0	2000 piece reel
MACP-007741-CG09TB	Customer Test Board

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400  
• India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product's or information contained herein without notice.

## 17dB Broadband CATV, Coupler 5-1200MHz

MACP-007741-CG09E0  
V2


Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75\Omega$  <sup>1</sup>

Parameter	Frequency	Units	Min	Typ	Max
Mainline Loss	5 - 500 MHz	dB	-	0.5	0.9
	500 - 1000 MHz	dB	-	0.8	1.6
	1000 - 1200MHz	dB	-	1.5	2.8
Coupling	5 - 1200 MHz	dB	-	17	$\pm 1.5$
Coupling Flatness	5 - 1200 MHz	dB	-	-	$\pm 1.0$
Directivity	5 - 50 MHz	dB	25	35	-
	50 - 500 MHz	dB	7	15	-
	500 - 1200MHz	dB	5	12	-
Return Loss	5 - 50 MHz	dB	23	27	-
	50 - 500MHz	dB	15	21	-
	500 - 1000MHz	dB	9	16	-
	1000 - 1200MHz	dB	7	15	-

## Recommended PCB Configuration

### Absolute Maximum Ratings <sup>1,2</sup>

Parameter	Absolute Maximum
Max Input Power	250mW
DC current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

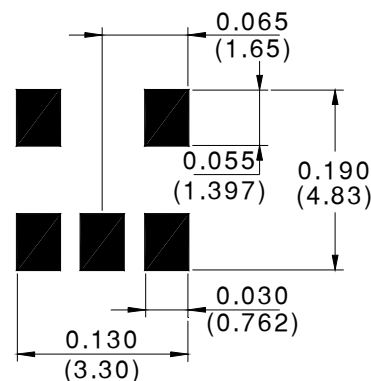


- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

## 17dB Broadband CATV, Coupler 5-1200MHz


MACP-007741-CG09E0  
V2

Typical Performance Curves  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75\Omega$


Coupling

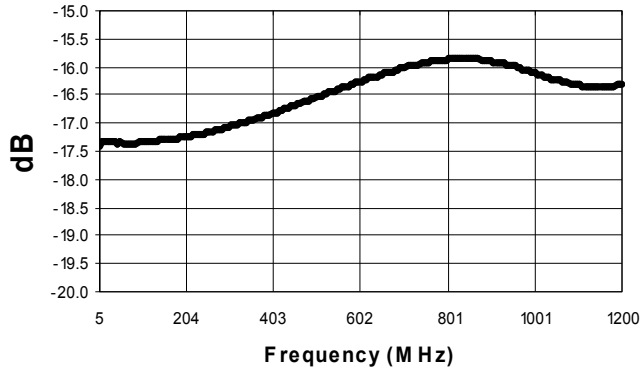


Main Line Loss

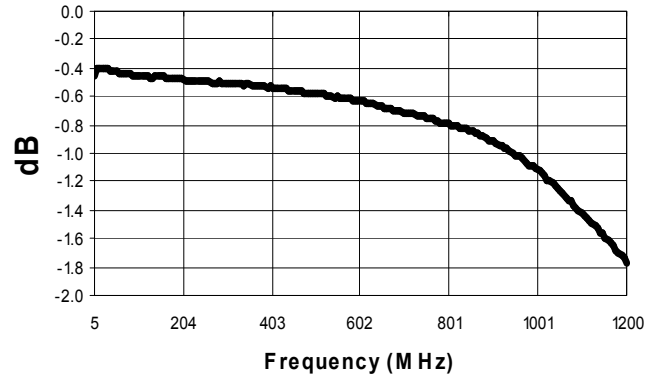


Input Return Loss

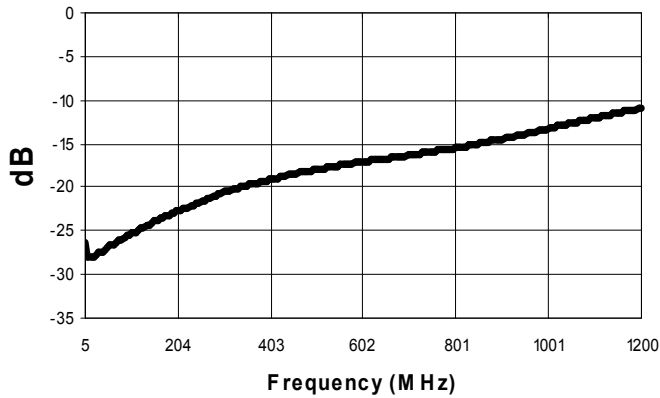

Output Return Loss

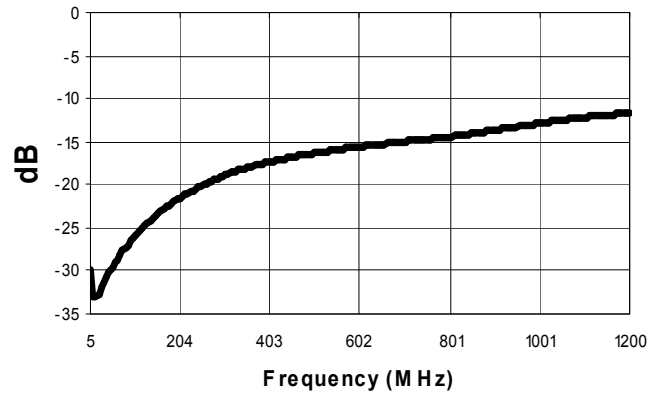

Coupled Return Loss

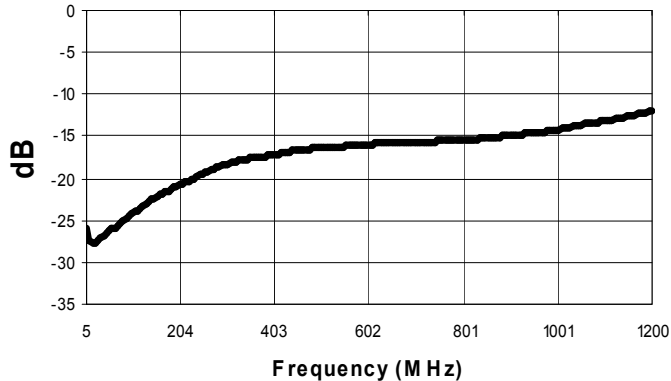

Directivity

