

## Features


- Surface Mount
- 75 Ohms
- RoHS Compliant
- RoHS version of ESSM-3-1-75

## Description

M/A-COM's MAPD-008109-C30040 is a 3 Way 0° Power Divider in a low cost, surface mount package. Ideally suited for high volume CATV applications.




## Schematic

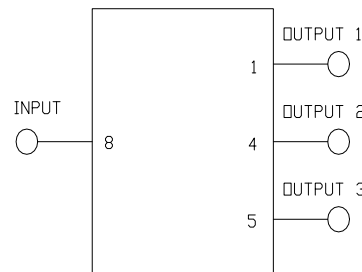

## Pin Configuration

Function	Pin No.
Ground	2,3,6,7
Output Port 1	1
Output Port 2	4
Output Port 3	5
Input	8

## Case Style: SM-4

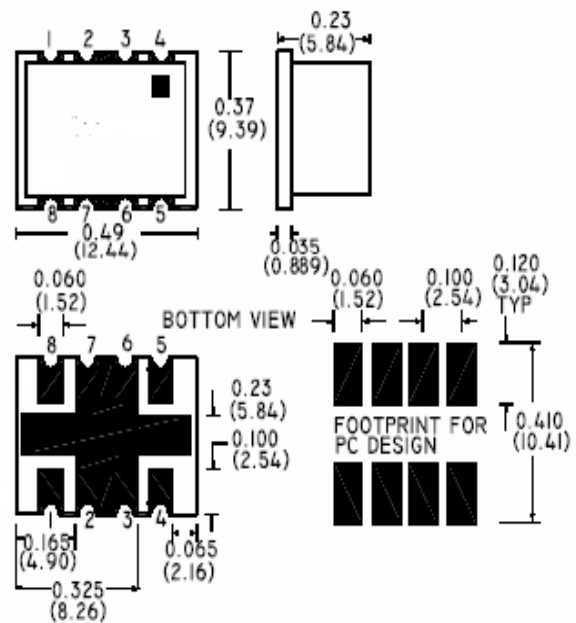

Dimensions in inches [mm].  
Tolerance where not specified: .xx ± .02, .xxx ± .010

## Ordering Information

Part Number	Package
MAPD-008109-C30040	500 piece reel
MAPD-008109-C300TB	Customer Test Board

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588  
Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

**Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75\Omega$**

Parameter	Frequency	Units	Min	Typ	Max
Insertion Loss	5 - 200 MHz	dB	—	0.28	0.5
Isolation	5 - 50 MHz	dB	30	37	—
	50 - 60 MHz	dB	33	40	—
	60 - 125MHz	dB	28	36	—
	125 - 200MHz	dB	24	28	—
Amplitude Unbalance	5 - 200 MHz	dB	—	—	$\pm 0.1$
Phase Unbalance	5 - 200 MHz	°	—	—	$\pm 1^\circ$
Input Return Loss	5 –200 MHz	dB	28	34	—
Output Return Loss	5 –200 MHz	dB	20	25	—

**Absolute Maximum Ratings <sup>1,2</sup>**

Parameter	Absolute Maximum
RF Power	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 sec.)	260°C
Storage Temperature	-55°C to +100°C
Operating Temperature	-40°C to +85°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

2

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


- North America Tel: 800.366.2266
- Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Typical Performance Curves  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75\Omega$


Insertion Loss: Reference Value -4.77dB

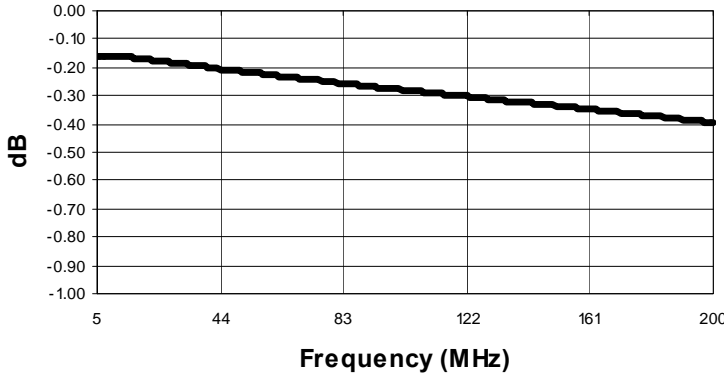


Isolation

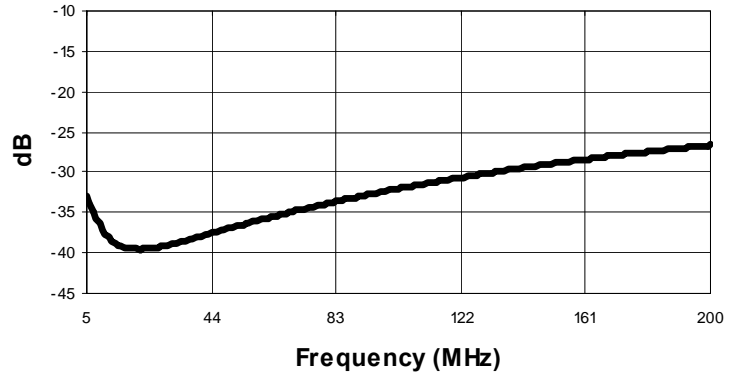


Amplitude Unbalance

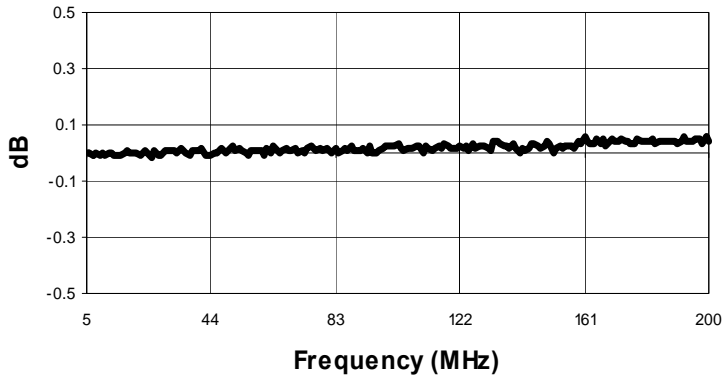

Phase Unbalance

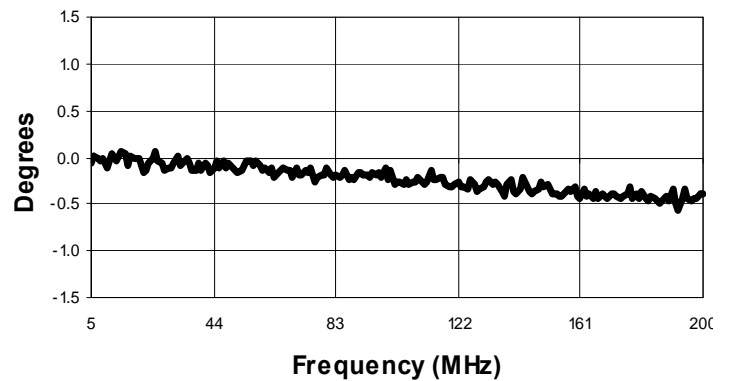

Return Loss: Input

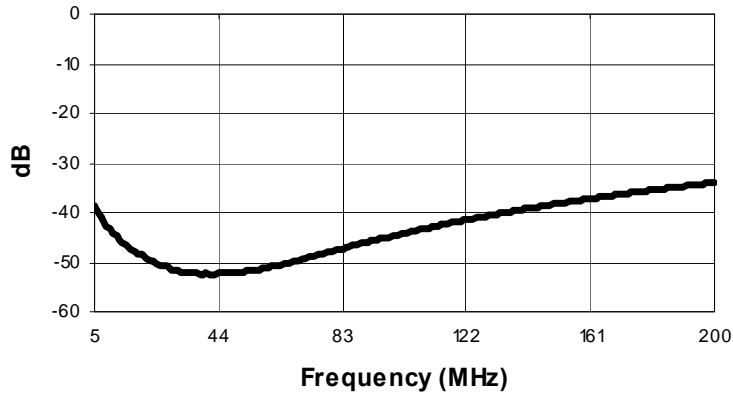

Return Loss: Output

