

Triple-Balanced Mixer

Rev. V2

Features

- LO 0.5 TO 19 GHz
- RF 0.5 TO 19 GHz
- IF 0.03 TO 5 GHz
- LO DRIVE +13 dBm (nominal)
- VERY WIDE BANDWIDTH

Description

MY87 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

Product Image



Ordering Information


Part Number	Package
MY87	Versapac
MY87C	SMA Connectorized

Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +13$ dBm (Downconverter Application only)


Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C
SSB Conversion Loss (max) & SSB Noise Figure (max)	$fR = 1$ to 18 GHz, $fL = 0.5$ to 18 GHz, $fI = 0.03$ to 3 GHz	dB	7.5	10.5	11.0
	$fR = 0.5$ to 18 GHz, $fL = 0.5$ to 18 GHz, $fI = 0.03$ to 4 GHz	dB	8.5	11.0	11.5
	$fR = 0.7$ to 19 GHz, $fL = 3$ to 19 GHz, $fI = 0.03$ to 5 GHz	dB	10.5	12.0	12.5
Isolation, L to R (min)	$fL = 0.5$ to 3 GHz	dB	17	10	8
	$fL = 3$ to 19 GHz	dB	30	20	18
Isolation, L to I (min)	$fL = 0.5$ to 5 GHz	dB	32	22	20
1 dB Conversion Comp.	$fL = +13$ dBm	dBm	+8		
Input IP3	$fR1 = 5$ GHz at -6 dBm, $fR2 = 6.01$ GHz at -6 dBm, $fL = 7$ GHz at +13 dBm	dBm	+16.5		
	$fR1 = 15$ GHz at -6 dBm, $fR2 = 15.01$ GHz at -6 dBm, $fL = 18$ GHz at +13 dBm	dBm	+18		

Typical Performance Curves


Conversion Loss vs. LO Drive Power

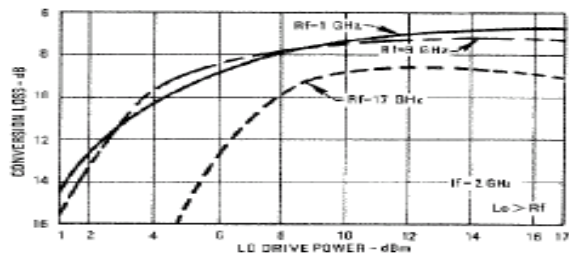




R-Port VSWR vs. Frequency

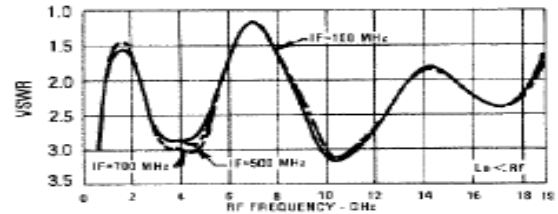



Conversion Loss vs. Frequency LO @ +13 dBm

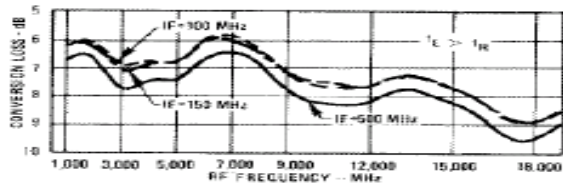

R-Port VSWR vs. Frequency

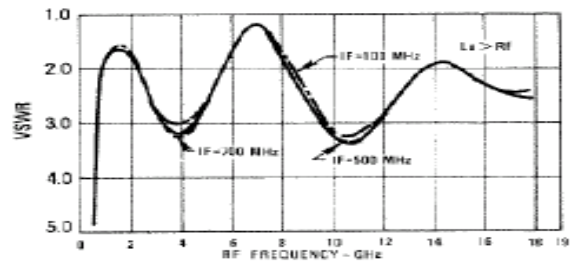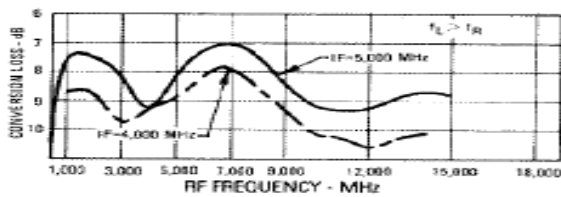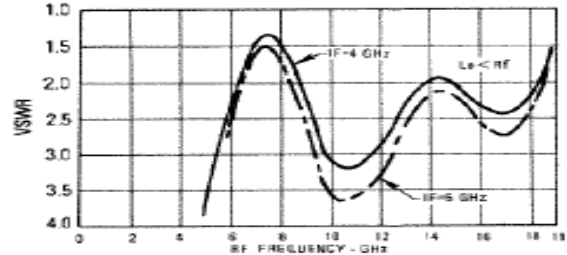

Isolation vs. Frequency

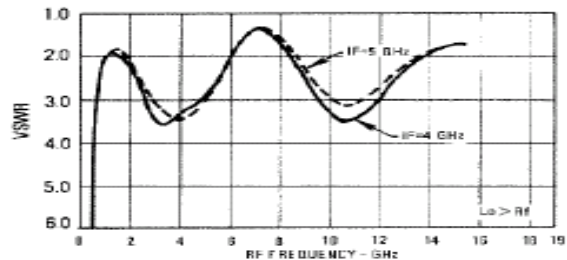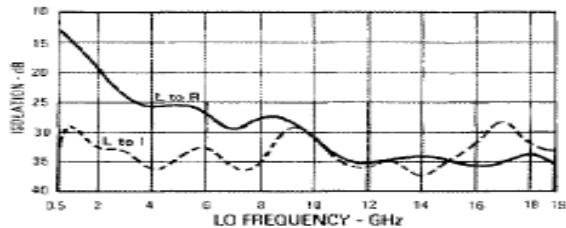

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc and its affiliates reserve the right to make changes to the products and information contained herein without notice.


Triple-Balanced Mixer

Rev. V2


Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+26 dBm max @ +25°C +23 dBm max @ +100°C
Peak Input Current	100 mA DC


Outline Drawing: Versapac *

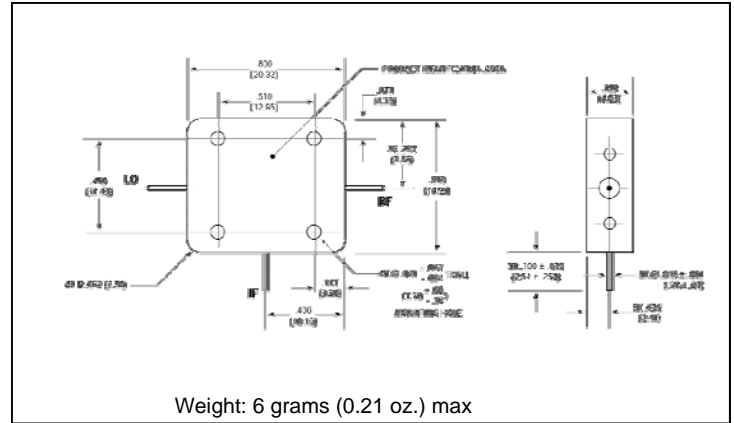


Outline Drawing: SMA Connectorized *

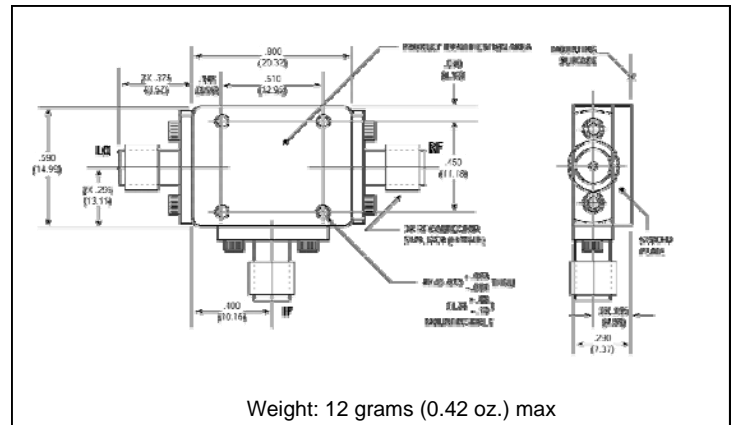



L-PORT VSWR vs. Frequency

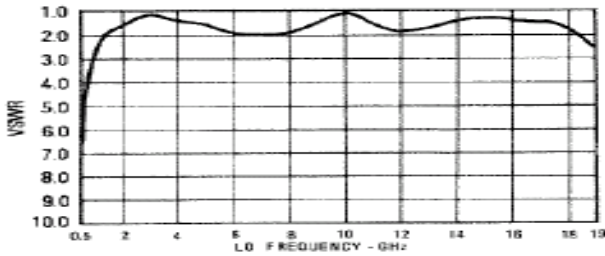

I-Port VSWR vs. Frequency

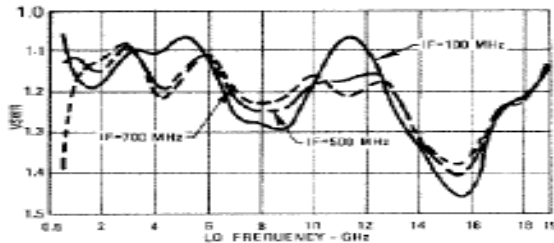

I-Port VSWR vs. Frequency

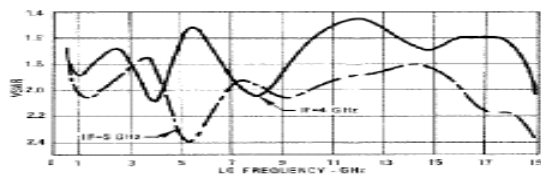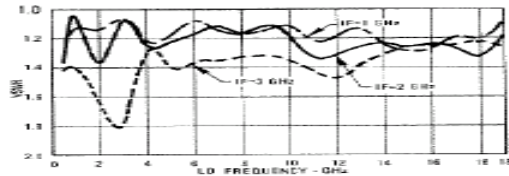

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.