

PH1090-700B




Avionics Pulsed Power Transistor
700W, 1030-1090 MHz, 32µs Pulse, 2% Duty

M/A-COM Products
Released, 30 May 07

Features

- NPN silicon microwave power transistors
- Common base configuration
- Broadband Class C operation
- High efficiency inter-digitized geometry
- Diffused emitter ballasting resistors
- Gold metallization system
- Internal input and output impedance matching
- Hermetic metal/ceramic package
- RoHS Compliant

Outline Drawing

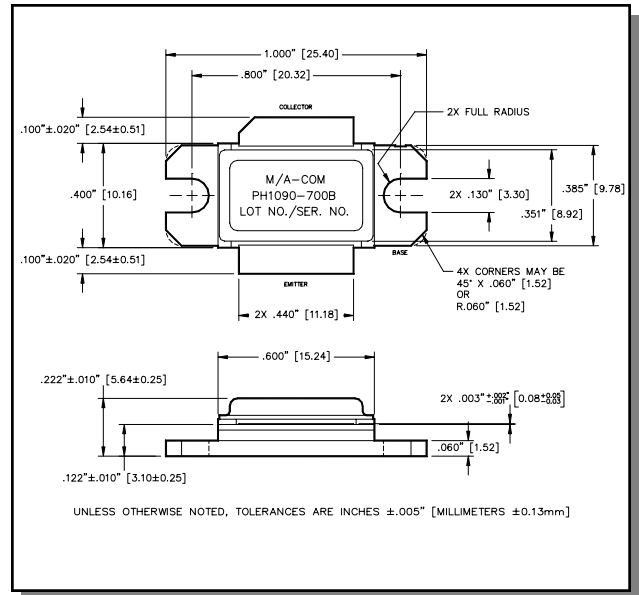

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	80	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current (Peak)	I_C	70	A
Power Dissipation @ +25°C	P_{TOT}	2.9	kW
Storage Temperature	T_{STG}	-65 to +200	°C
Junction Temperature	T_J	200	°C

Electrical Specifications: $T_C = 25 \pm 5^\circ\text{C}$ (Room Ambient)

Parameter	Test Conditions	Frequency	Symbol	Min	Max	Units
Collector-Emitter Breakdown Voltage	$I_C = 250\text{mA}$		BV_{CES}	80	-	V
Collector-Emitter Leakage Current	$V_{CE} = 50\text{V}$		I_{CES}	-	25	mA
Thermal Resistance	$V_{CC} = 50\text{V}$, $P_{out} = 700\text{W}$	$F = 1030, 1090\text{ MHz}$	$R_{TH(JC)}$	-	0.06	°C/W
Input Power	$V_{CC} = 50\text{V}$, $P_{out} = 700\text{W}$	$F = 1030, 1090\text{ MHz}$	P_{IN}	-	125	W
Power Gain	$V_{CC} = 50\text{V}$, $P_{out} = 700\text{W}$	$F = 1030, 1090\text{ MHz}$	G_P	7.5	-	dB
Collector Efficiency	$V_{CC} = 50\text{V}$, $P_{out} = 700\text{W}$	$F = 1030, 1090\text{ MHz}$	η_C	50	-	%
Input Return Loss	$V_{CC} = 50\text{V}$, $P_{out} = 700\text{W}$	$F = 1030, 1090\text{ MHz}$	RL	-	-10	dB
Load Mismatch Tolerance	$V_{CC} = 50\text{V}$, $P_{out} = 700\text{W}$	$F = 1030, 1090\text{ MHz}$	VSWR-T	-	5:1	-
Load Mismatch Stability	$V_{CC} = 50\text{V}$, $P_{out} = 700\text{W}$	$F = 1030, 1090\text{ MHz}$	VSWR-S	-	1.5:1	-

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 - **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 - **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions, Inc. and its affiliates reserve the right to make changes to the product's specifications without notice.

www.BDTIC.com/MACOM

PH1090-700B



Avionics Pulsed Power Transistor
700W, 1030-1090 MHz, 32µs Pulse, 2% Duty


M/A-COM Products
Released, 30 May 07

Typical RF Performance

Freq. (MHz)	Pin (W)	Pout (W)	Gain (dB)	Ic (A)	Eff (%)	RL (dB)	VSWR-S (1.5:1)	VSWR-T (5:1)
1030	96	700	8.66	25.4	55.3	-17.5	S	P
1090	101	700	8.42	25.7	54.5	-16.7	S	P

RF Test Fixture Impedance


F (MHz)	Z _{IF} (Ω)	Z _{OF} (Ω)
1030	1.1 - j1.4	1.2 - j0.8
1060	1.1 - j1.2	1.0 - j0.7
1090	1.0 - j1.0	0.8 - j0.7

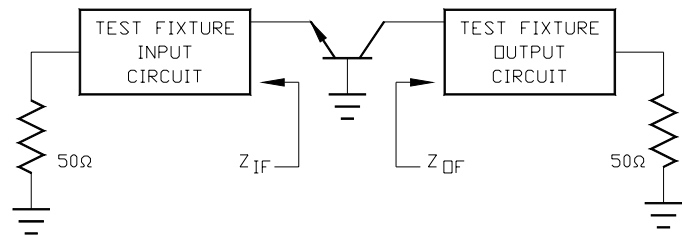


Avionics Pulsed Power Transistor
700W, 1030-1090 MHz, 32µs Pulse, 2% Duty

M/A-COM Products
Released, 30 May 07

RF Power Transfer Curve
1030 MHz, Gain & Efficiency vs. Output Power

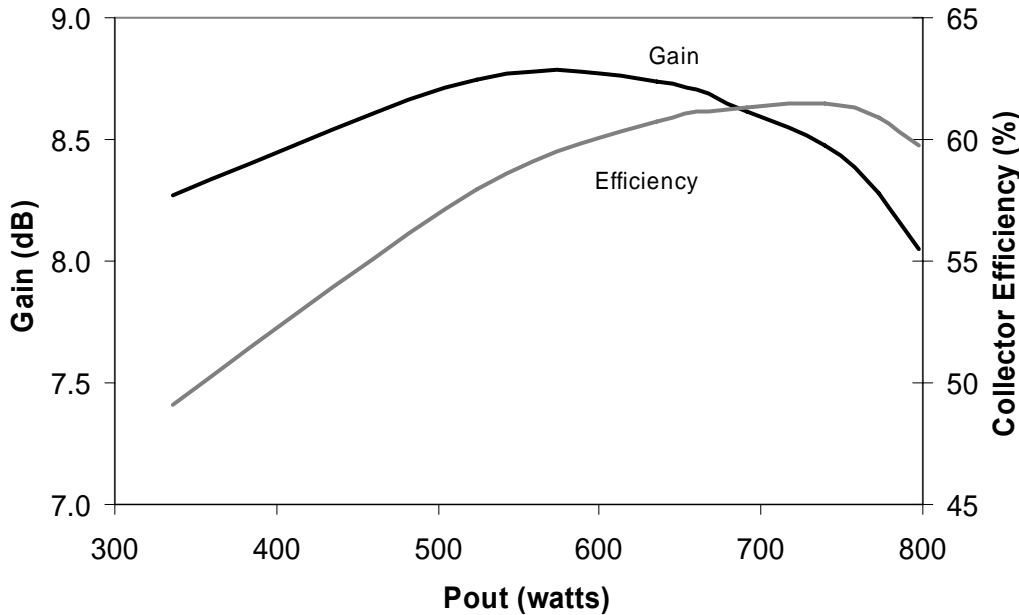

RF Power Transfer Curve
1090 MHz, Gain & Efficiency vs. Output Power

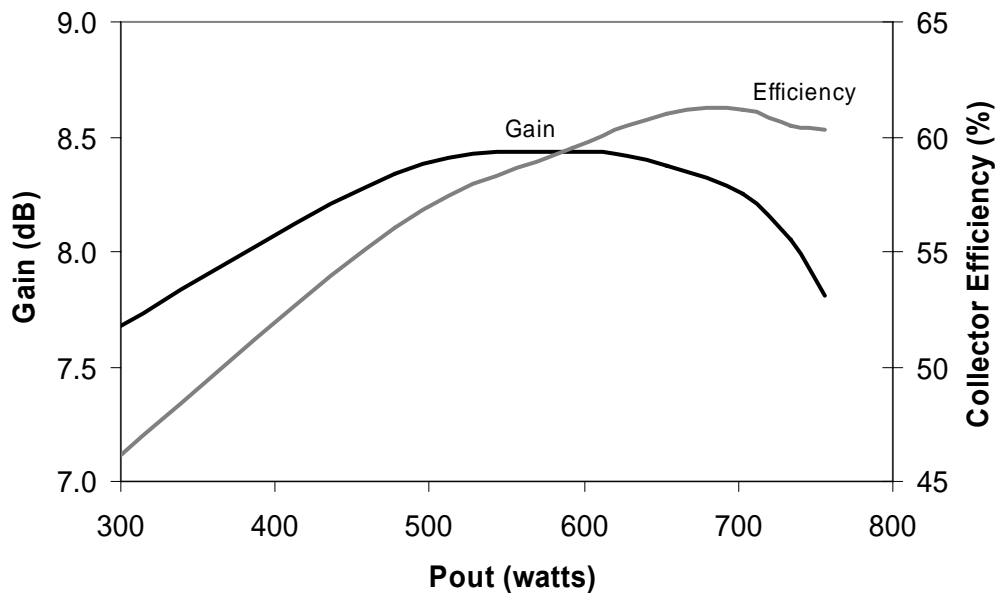

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298


Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions, Inc. and its affiliates reserve the right to make changes to the product's information contained herein without notice.


Avionics Pulsed Power Transistor
700W, 1030-1090 MHz, 32µs Pulse, 2% Duty

M/A-COM Products
Released, 30 May 07

Test Fixture Circuit Dimensions

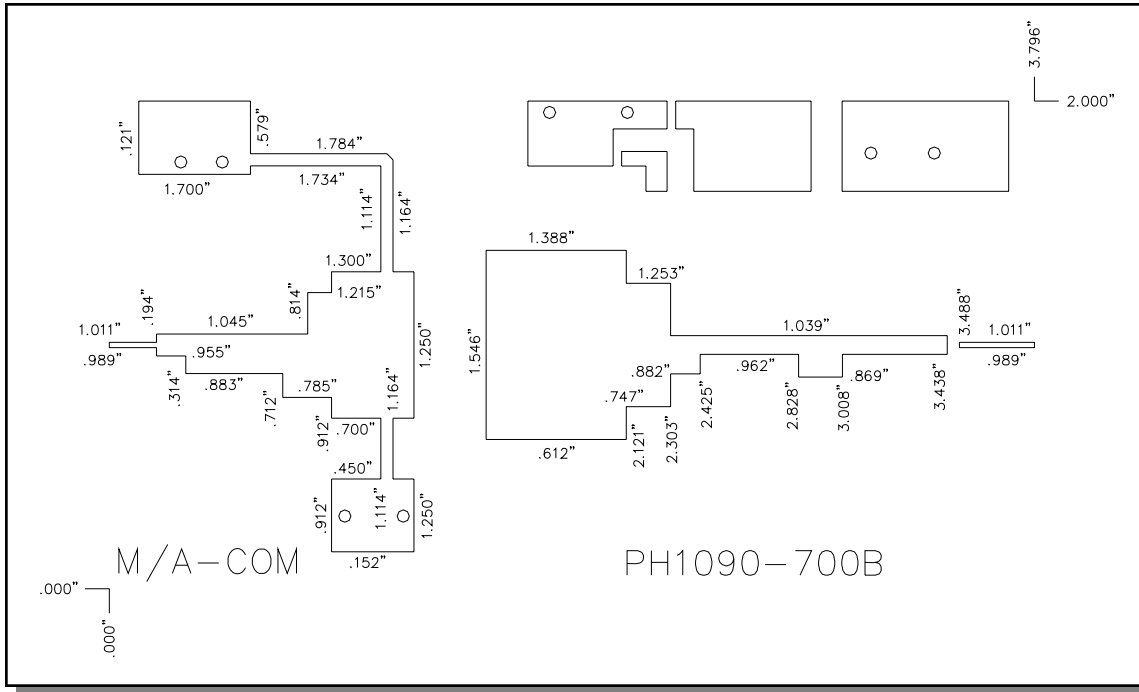

Test Fixture Assembly

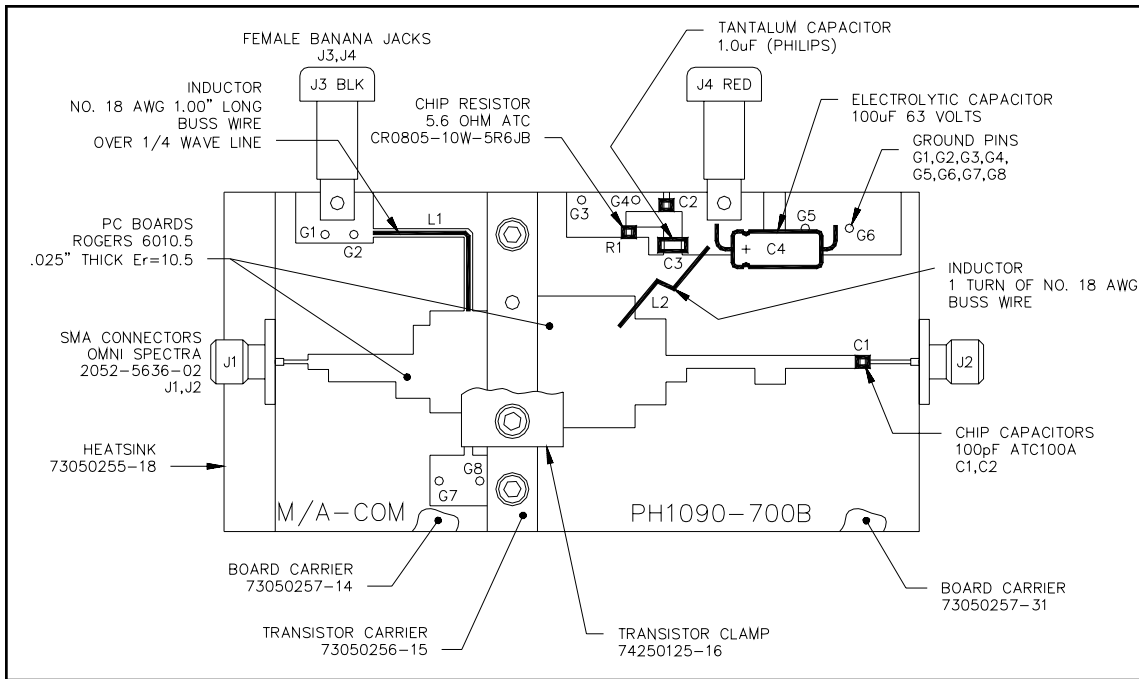

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 - **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 - **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc and its affiliates reserve the right to make changes to the products or information contained herein without notice.