



# PRESS FIT AVALANCHE AUTOMOTIVE RECTIFIER (BOSCH)

APRB40Z

AVALANCHE VOLTAGE 24 to 32 Volts

CURRENT 40 Amperes


## Technical Specification:

### Features:

- High power capability
- Economical
- Avalanche Voltage: 24V to 32V
- Glass passivated chip

### MECHANICAL DATA

- Case: Copper case
- Epoxy: UL94-0 rate flame retardant
- Polarity: As marked of case bottom
- Technology vacuum soldered
- Lead: Plated slug, solderable per MIL-STD-202E Method 208C
- Weight: 0.28ounce, 7.86 Grams

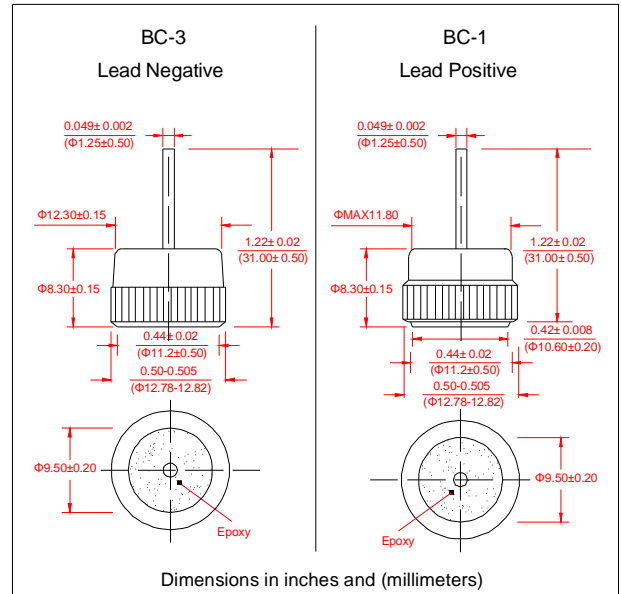

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

Electrical Characteristics @ 25°C	SYMBOLS	MIN	NOMINAL	MAX	UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$		20		Volts
Working Peak Reverse Voltage	$V_{RRM}$		20		
DC Blocking Voltage	$V_{DC}$		20		
Average Rectified Forward Current ( $T_c=125^\circ C$ )	$I_o$		40		Amps
Repetitive Peak Reverse Surge Current $T_c=10msec$ Duty Cycle < 1%	$I_{RSM}$		40		Amps
Breakdown Voltage ( $V_{br@ir=100mA}$ , $T_c=25^\circ C$ ) $I_r=90Amps$ , $T_c=150^\circ C$ , $PW=80\mu sec$	$V_{br1}$	24	25-27	32	Volts
	$V_{br2}$			40	Volts
Forward Voltage Drop @ $I_f=100Amps < 300\mu sec$	$V_F$		1.05	1.08	Volts
Peak Forward Surge Current	$I_{FSM}$		500		Amps
Reverse Leakage ( $V_R=17Vdc$ ) $T_A=25^\circ C$	$I_R$		1.0	2.0	uAmps
Operating and Storage Junction Temperature Range	$T_J, T_{STG}$		-65 to +175		°C

**Notes:** 1. Enough heatsink must be considered in application.

