



# SOZAA20L

**AVALANCHE VOLTAGE** 20 to 24 Volts  
**CURRENT** 20 Amperes


## Technical Specifecation:

### Features:

- High power capability
- Economical
- Avalanche Voltage: 20V to 24V

### MECHANICAL DATA

- Copper slug
- Polarity: colour dots denotes cathode end
- Technology vacuum soldered
- Mounting position: Any
- Weight: 0.0124 ounce, 0.35 Grams

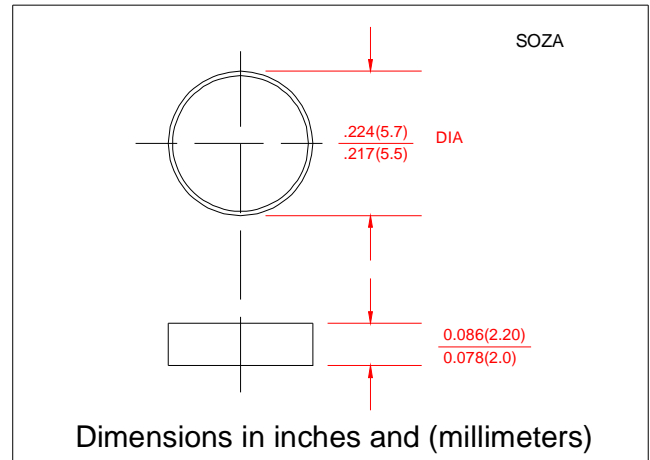

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

Electrical Characteristics @ 25°C	SYMBOLS	MIN	NOMINAL	MAX	UNITS
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>		17		Volts
Working Peak Reverse Voltage	V <sub>RRM</sub>		17		
DC Blocking Voltage	V <sub>DC</sub>		17		
Average Rectified Forward Current (T <sub>c</sub> =125°C)	I <sub>o</sub>		20		Amps
Repetitive Peak Reverse Surge Current T <sub>c</sub> =10msec Dury Cycle<1%	I <sub>RSM</sub>		20		Amps
Breakdown Voltage (V <sub>br</sub> @I <sub>r</sub> =100mA, T <sub>c</sub> =25°C)	V <sub>br1</sub>	20	24	24	Volts
I <sub>r</sub> =90Amps, T <sub>c</sub> =150°C, PW=80usec	V <sub>br2</sub>			32	Volts
Forward Voltage Drop @I <sub>f</sub> =100Amps<300usec	V <sub>F</sub>		1.05	1.10	Volts
Peak Forward Surge Current	I <sub>FSM</sub>		400		Amps
Reverse Leakage (V <sub>R</sub> =17Vdc) T <sub>A</sub> =25°C	I <sub>R</sub>		0.9	1.5	uAmps
Operating and Storage Junction Temperature Range	T <sub>J</sub> , T <sub>STG</sub>		-65 to +175		°C

**Notes:** 1. Enough heatsink must be considered in application.

