

M63827WP/DP

Taiwan A'ssy product 7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

DESCRIPTION

M63827WP and M63827DP are seven-circuit Darlington transistor arrays with clamping diodes. The circuits are made of NPN transistors. Both the semiconductor integrated circuits perform high-current driving with extremely low input-current supply.

FEATURES

- Two package configurations (WP/DP)
- High breakdown voltage ($BV_{CEO} \geq 50V$)
- High-current driving ($I_c(max) = 500mA$)
- With clamping diodes
- Driving available with TTL, PMOS IC output
- Wide operating temperature range ($T_a = -40$ to $+85^{\circ}C$)

APPLICATION


Drives of relays and printers, digit drives of indication elements (LEDs and lamps), and CMOS bipolar logic IC interfaces.

WWW.BDTIC.com/MITSUBISHI


FUNCTION

The M63827WP and M63827DP each have seven circuits consisting of NPN Darlington transistors. These ICs have resistance of $2.7k\Omega$ between input transistor bases and input pins. A spike-killer clamping diode is provided between each output pin (collector) and COM pin (pin 9). The output transistor emitters are all connected to the GND pin (pin 8).

The collector current is 500mA maximum. Collector-emitter supply voltage is 50V maximum.

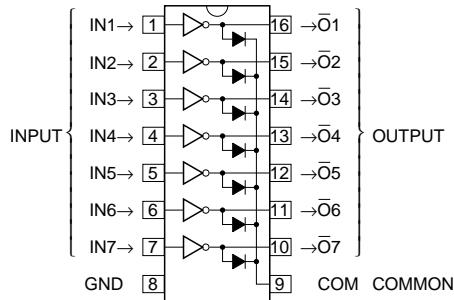PIN CONFIGURATION

16P4X-A(WP)
Package type 16P2X-B(DP)

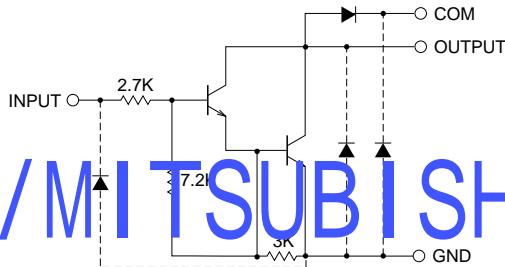CIRCUIT DIAGRAM

The seven circuits share the COM and GND.

The diode, indicated with the dotted line, is parasitic, and cannot be used.

Unit : Ω

ABSOLUTE MAXIMUM RATINGS (Unless otherwise noted, $T_a = -40 \sim +85^{\circ}C$)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CEO}	Collector-emitter voltage	Output, H	-0.5 ~ +50	V
I _C	Collector current	Current per circuit output, L	500	mA
V _I	Input voltage		-0.5 ~ +30	V
I _F	Clamping diode forward current		500	mA
V _R	Clamping diode reverse voltage		50	V
P _d	Power dissipation	$T_a = 25^{\circ}C$, when mounted on board	1.47(WP)/1.00(DP)	W
T _{opr}	Operating temperature		-40 ~ +85	°C
T _{stg}	Storage temperature		-55 ~ +125	°C

Feb. 2003

Taiwan A'ssy product

7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

RECOMMENDED OPERATING CONDITIONS (Unless otherwise noted, $T_a = -40 \sim +85^\circ\text{C}$)

Symbol	Parameter	Limits			Unit
		min	typ	max	
Vo	Output voltage	0	—	50	V
IC	Collector current (Current per 1 circuit when 7 circuits are coming on simultaneously)	Duty Cycle WP : no more than 8% DP : no more than 5%	0	—	400
		Duty Cycle WP : no more than 30% DP : no more than 20%	0	—	200
VIH	"H" input voltage	IC \leq 400mA	3.85	—	V
		IC \leq 200mA	3.4	—	
VIL	"L" input voltage	0	—	0.6	V

ELECTRICAL CHARACTERISTICS (Unless otherwise noted, $T_a = 25^\circ\text{C}$)


Symbol	Parameter	Test conditions	Limits			Unit
			min	typ	max	
V (BR) CEO	Collector-emitter breakdown voltage	$I_{CEO} = 100\mu\text{A}$	50	—	—	V
VCE (sat)	Collector-emitter saturation voltage	$I_I = 500\mu\text{A}, I_C = 350\text{mA}$	—	1.2	1.6	V
		$I_I = 350\mu\text{A}, I_C = 200\text{mA}$	—	1.0	1.3	
		$I_I = 250\mu\text{A}, I_C = 100\text{mA}$	—	0.9	1.1	
II	Input current	$V_I = 3.85\text{V}$	—	0.9	1.4	mA
VF	Clamping diode forward voltage	$I_F = 350\text{mA}$	—	1.4	2.0	V
IR	Clamping diode reverse current	$V_R = 50\text{V}$	—	—	100	μA
hFE	DC amplification factor	$V_{CE} = 2\text{V}, I_C = 350\text{mA}$	1000	3000	—	—

www.BDTIC.com/MITSUBISHI


SWITCHING CHARACTERISTICS (Unless otherwise noted, $T_a = 25^\circ\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			min	typ	max	
ton	Turn-on time	$CL = 15\text{pF}$ (note 1)	—	20	—	ns
toff	Turn-off time		—	400	—	ns

NOTE 1 TEST CIRCUIT

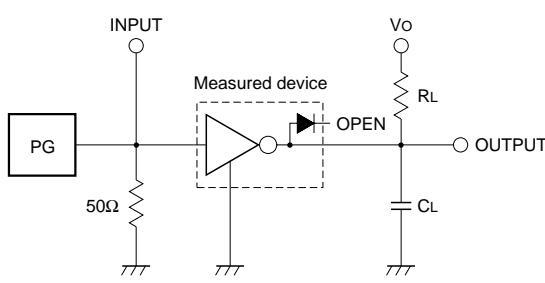

TIMING DIAGRAM






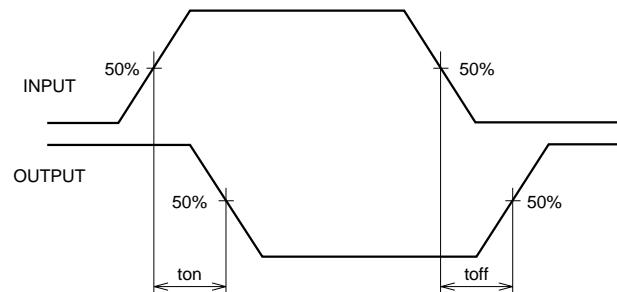


(1) Pulse generator (PG) characteristics : PRR = 1kHz,
 $t_w = 10\mu\text{s}$, $t_r = 6\text{ns}$, $t_f = 6\text{ns}$, $Z_0 = 50\Omega$
 $V_I = 3.85\text{V}$

(2) Input-output conditions : $R_L = 25\Omega$, $V_O = 10\text{V}$
(3) Electrostatic capacity C_L includes floating capacitance at connections and input capacitance at probes







Taiwan A'ssy product

7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

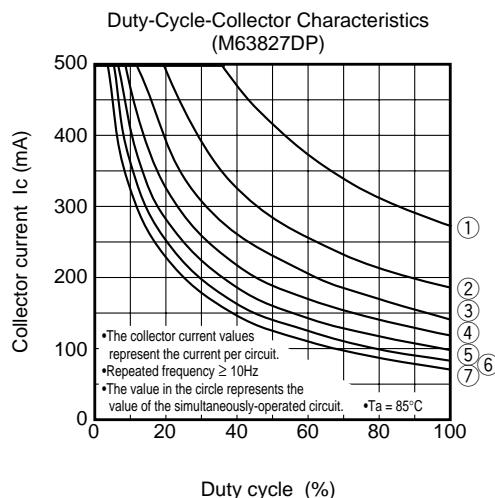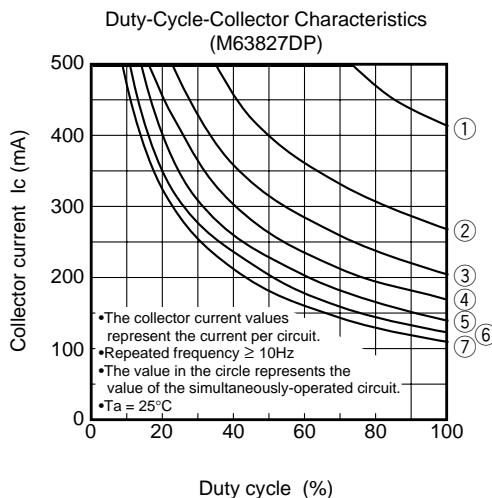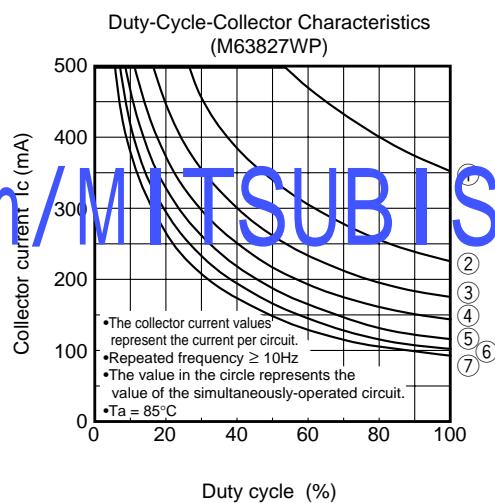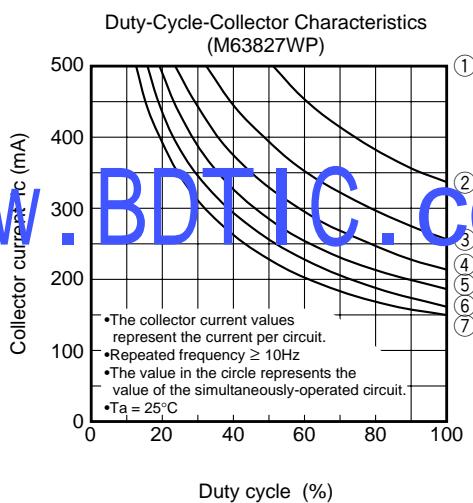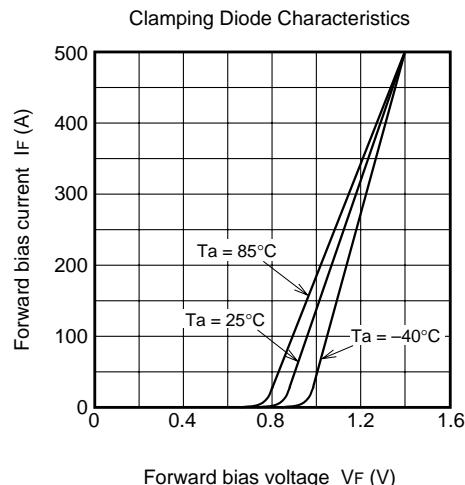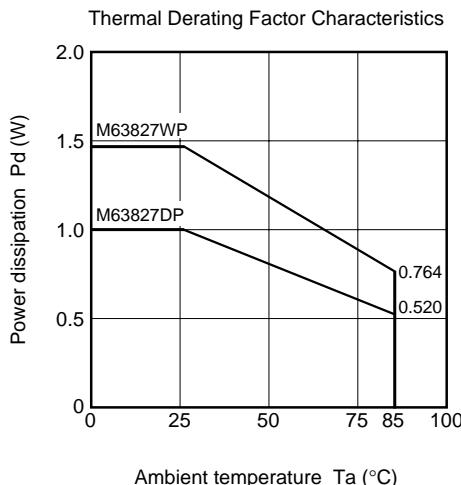TYPICAL CHARACTERISTICS

Taiwan A'ssy product

7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

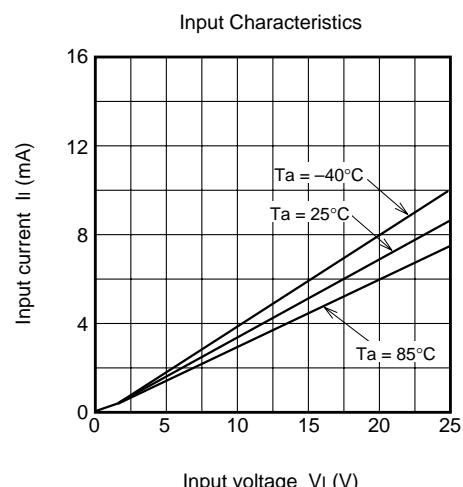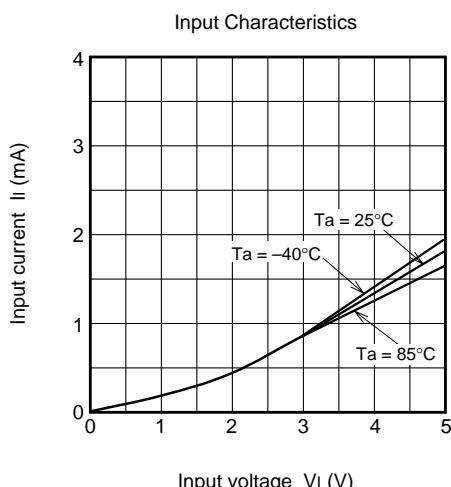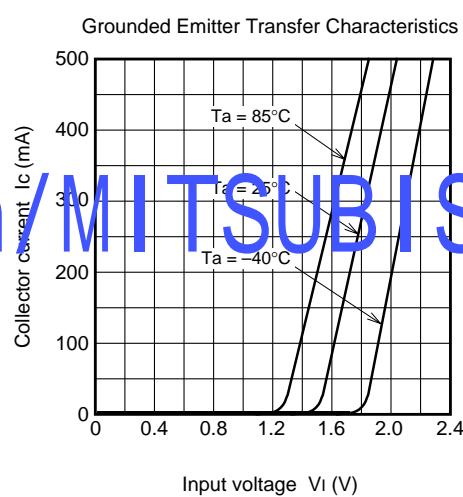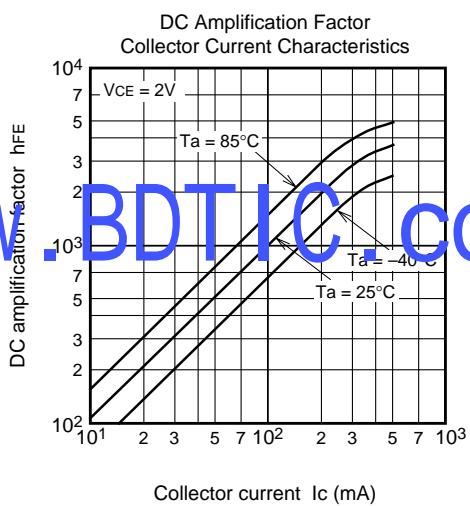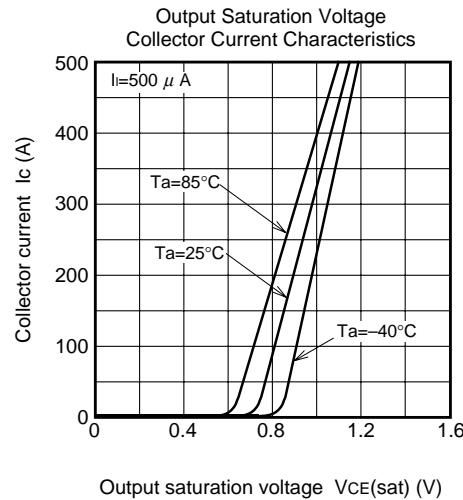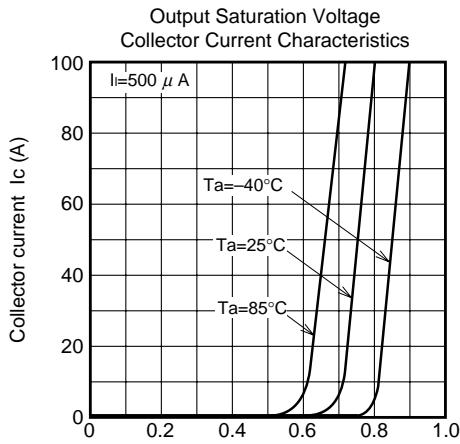



Taiwan A'ssy product

7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

PACKAGE OUTLINE

16P4X-A

PACKAGE TYPE :
16P4X-A 16PIN PLASTIC MOLD DUAL INLINE PACKAGE

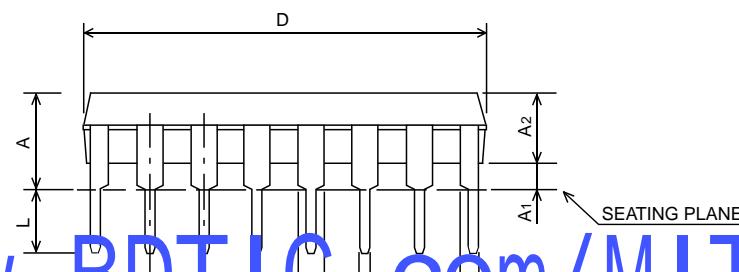

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	—	—	4.57
A ₁	0.38	—	—
A ₂	3.25	3.3	3.45
b	0.36	0.46	0.56
b ₁	1.14	1.52	1.78
b ₂	0.76	0.99	1.14
c	0.20	0.25	0.33
D	18.9	19.15	19.3
E	6.35	6.5	6.65
e	—	2.54	—
e ₁	7.62	7.94	8.26
e ₂	8.64	9.145	9.65
L	3.18	—	—

www.BDTIC.com/MITSUBISHI

Taiwan A'ssy product






7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

16P2X-B

PACKAGE TYPE :

16P2X-B 16PIN PLASTIC MOLD SMALL OUTLINE PACKAGE

Dimension in mm

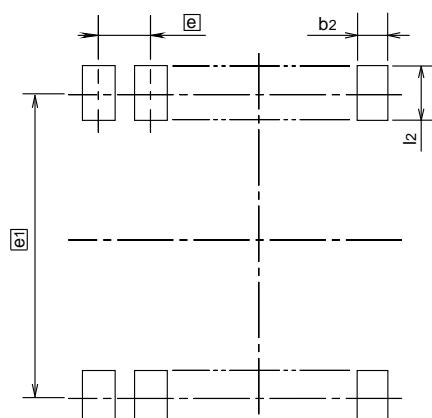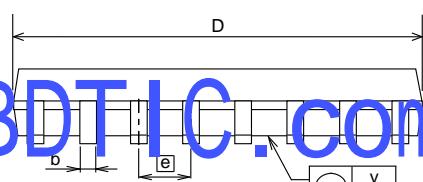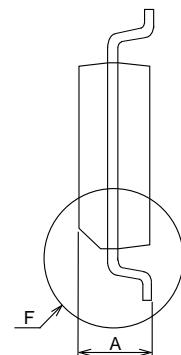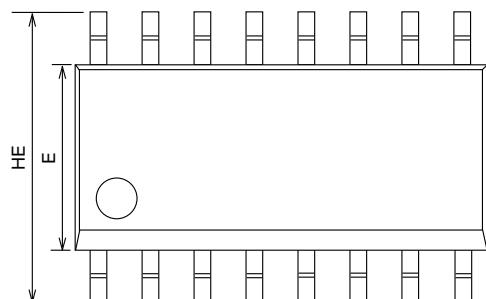

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	1.47	1.6	1.73
A1	0.1	0.175	0.25
A2	—	1.45	—
b	0.402	0.41	0.42
c	0.19	0.2	0.25
D	9.8	9.91	10.01
E	3.81	3.91	3.99
e	—	1.27	—
HE	5.79	5.99	6.2
L	0.37	0.71	1.27
y	—	—	0.1
θ	0°	—	8°
b2	—	0.76	—
e_1	—	5.72	—
l2	1.27	—	—