
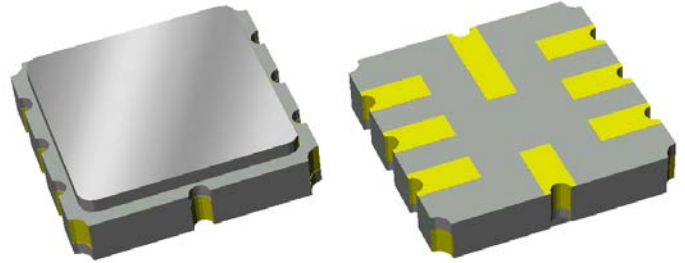


Preliminary Data Sheet


Features

- WiMAX & Broadband Wireless applications
- High attenuation
- Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Hermetic
- RoHS compliant (2002/95/EC), Pb-free 




Package

Surface Mount 5.00 x 5.00 x 1.32 mm

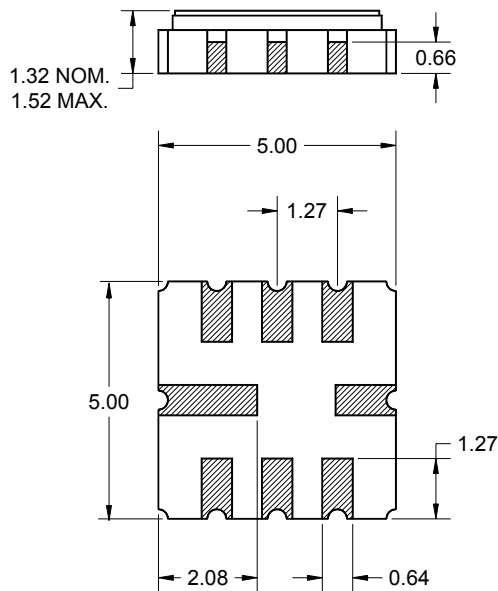

Pin Configuration

Bottom View



Pin No.	Description
7	Input
3	Output
1,5	Ground
2,4,6,8	Case ground

Dimensions shown are nominal in millimeters
All tolerances are $\pm 0.15\text{mm}$ except overall
length and width $\pm 0.13\text{mm}$

Body: Al_2O_3 ceramic
Lid: Kovar, Ni plated
Terminations: Au plating 0.5 - 1.0 μm ,
over a 2 - 6 μm Ni plating

Preliminary Data Sheet

Target Electrical Specifications ^(1,2)

Operating Temperature Range: ⁽³⁾ -40 to +85 °C


Parameter	Minimum	Typical	Maximum	Unit
Center Frequency	-	520	-	MHz
Insertion Loss at Center Frequency	-	10.8	12.25	dB
Lower 1 dB Bandedge ⁽⁴⁾	-	516.74	517.5	MHz
Upper 1 dB Bandedge	522.5	523.01	-	MHz
1 dB Bandwidth ⁽⁴⁾	6	6.2	-	MHz
3 dB Bandwidth ⁽⁴⁾	6.9	7.09	-	MHz
10 dB Bandwidth ⁽⁴⁾	-	8.15	9.3	MHz
30 dB Bandwidth ⁽⁴⁾	-	11.3	11.8	MHz
Amplitude Variation ⁽⁵⁾ 517 - 523 MHz	-	1.05	2.0	dB p-p
Group Delay Variation ⁽⁵⁾ 517 - 523 MHz	-	125	200	ns p-p
Relative Attenuation ⁽⁴⁾ 10.0 - 350.0 MHz	45	55	-	dB
350.0 - 480.0 MHz	40	50	-	dB
480.0 - 514.1 MHz	30	37	-	dB
525.9 - 600.0 MHz	30	37	-	dB
600.0 - 800.0 MHz	30	55	-	dB
Source Impedance	-	50	-	Ω
Load Impedance	-	50	-	Ω

Notes:

1. All specifications are based on the test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to manufacturing tolerances
4. All attenuation measurements are referenced to IL at Center Frequency
5. Variation is defined as the total peak to peak variation over the defined frequency range





Test Circuit:

Actual matching values may vary due to PCB layout and parasitics

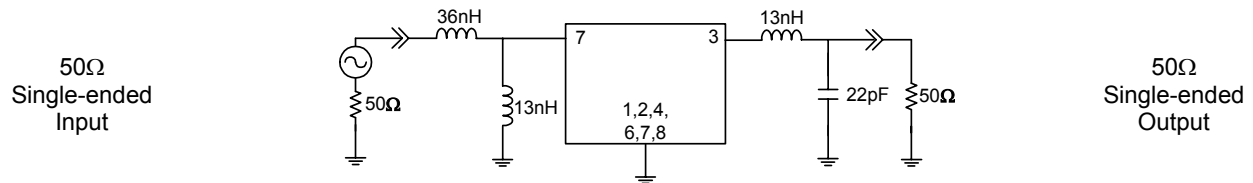


Preliminary Data Sheet


Typical Performance (at +25°C)

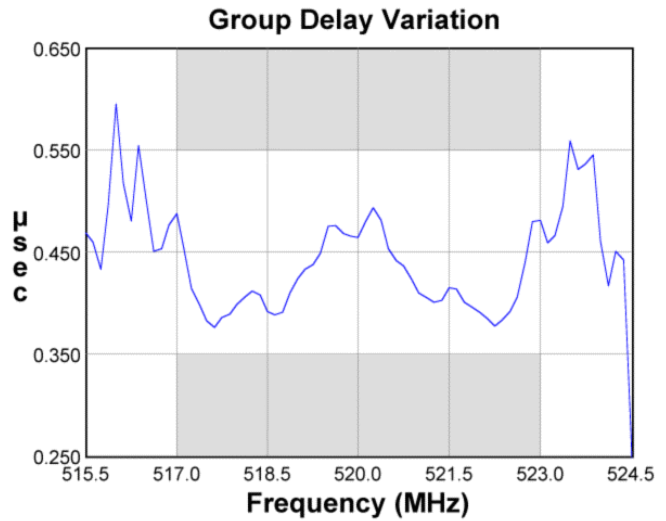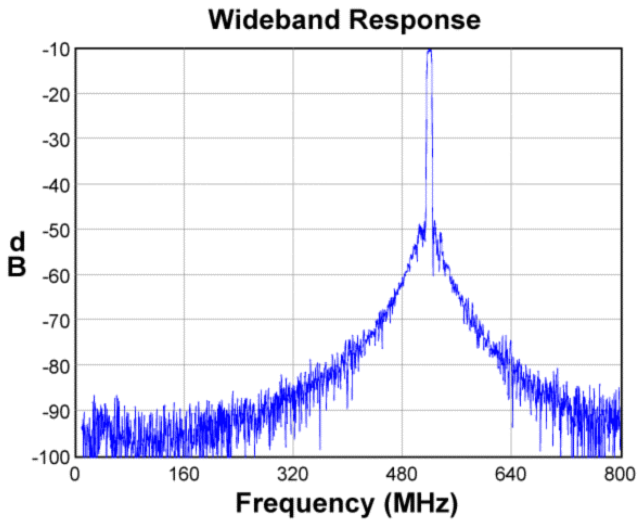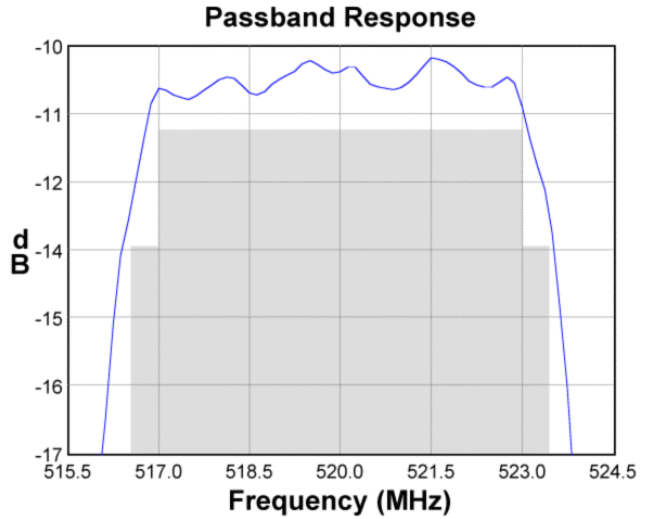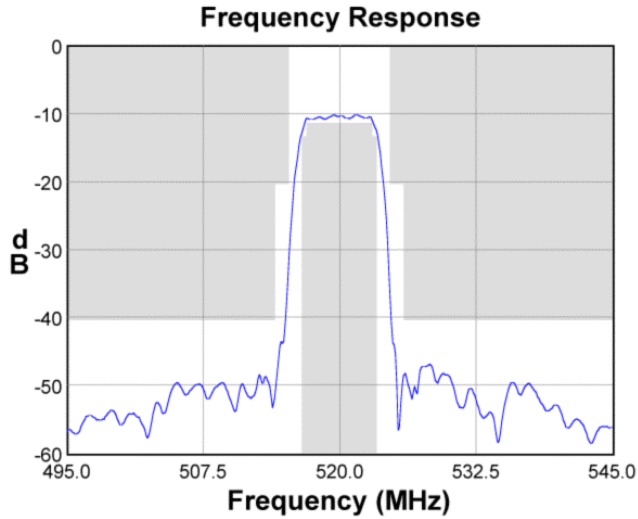

Input Smith Chart

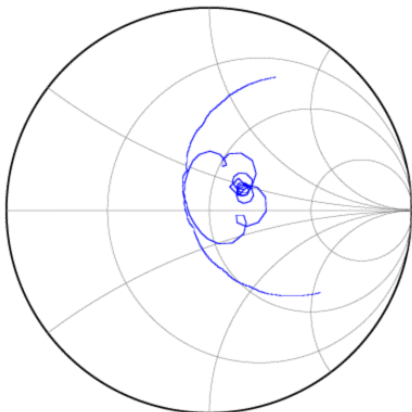


Output Smith Chart

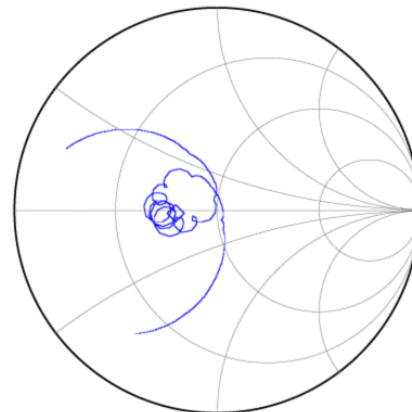

Preliminary Data Sheet


Matching Schematics

Actual matching values may vary due to PCB layout and parasitics

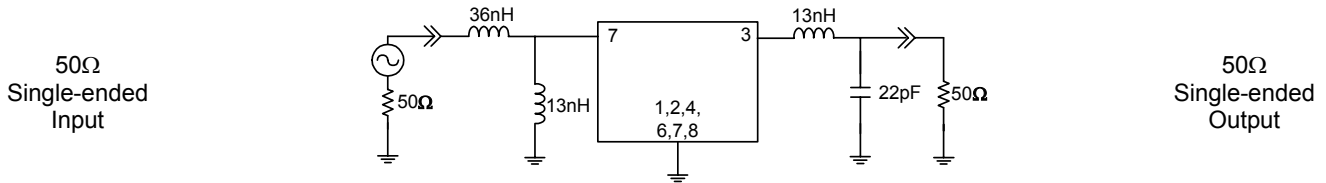


Marking

PCB Footprint


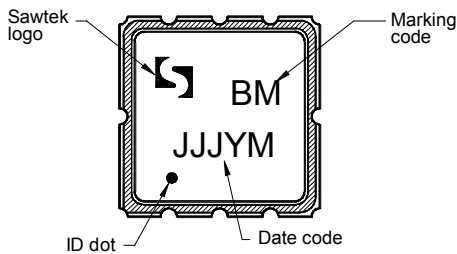


The date code consists of: JJJ = Julian day, Y = last digit of year, M = manufacturing site code

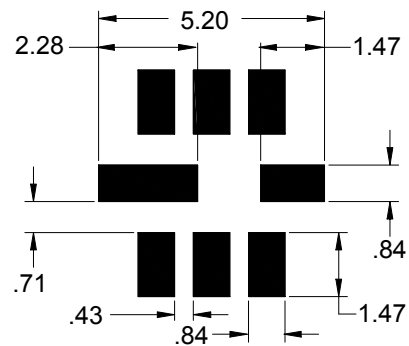

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

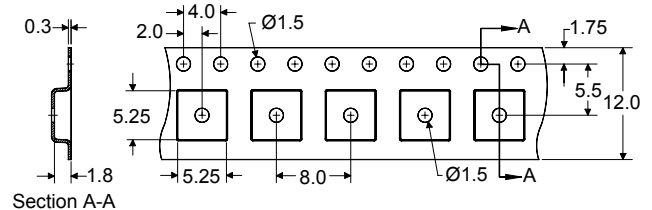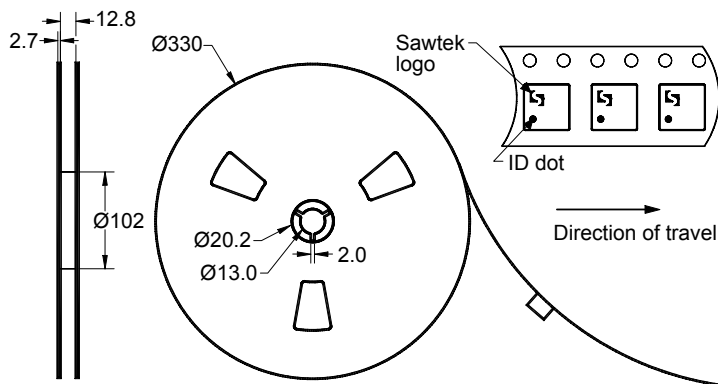

Dimensions shown are nominal in millimeters
Packaging quantity: 4000 units/reel


Preliminary Data Sheet

Maximum Ratings


Parameter	Symbol	Minimum	Maximum	Unit
Operating Temperature Range	T	-40	+85	°C
Storage Temperature Range	T _{stg}	-40	+85	°C

Important Notes

Warnings

- Electrostatic Sensitive Device (ESD) 
- Avoid ultrasonic exposure

RoHS Compliance

- This product complies with EU directive 2002/95/EC (RoHS) 

Solderability

- Compatible with JEDEC J-STD-020C **Pb**-free process, **260°C** peak reflow temperature

Links to Additional Technical Information

[PCB Layout Tips](#)

[Qualification Flowchart](#)

[Soldering Profile](#)

[S-Parameters](#)

[RoHS Information](#)

[Other Technical Information](#)

TriQuint's liability is limited only to the Surface Acoustic Wave (SAW) component(s) described in this data sheet. TriQuint does not accept any liability for applications, processes, circuits or assemblies, which are implemented using any TriQuint component described in this data sheet.

Contact Information

TriQuint 
SEMICONDUCTOR

PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: info-product@tqs.com
Web: www.triquint.com

Or contact one of our worldwide
Network of [sales offices](#),
[Representatives or distributors](#)