


PROPRIETARY DATA

This document may not be reproduced, disclosed, or otherwise used, in whole or in part, without the written permission of SIRENZA MICRODEVICES



REVISION HISTORY


REV	DESCRIPTION	ECD	APPR	DATE
A	INITIAL RELEASE	1878	RIVAS	11/4/02

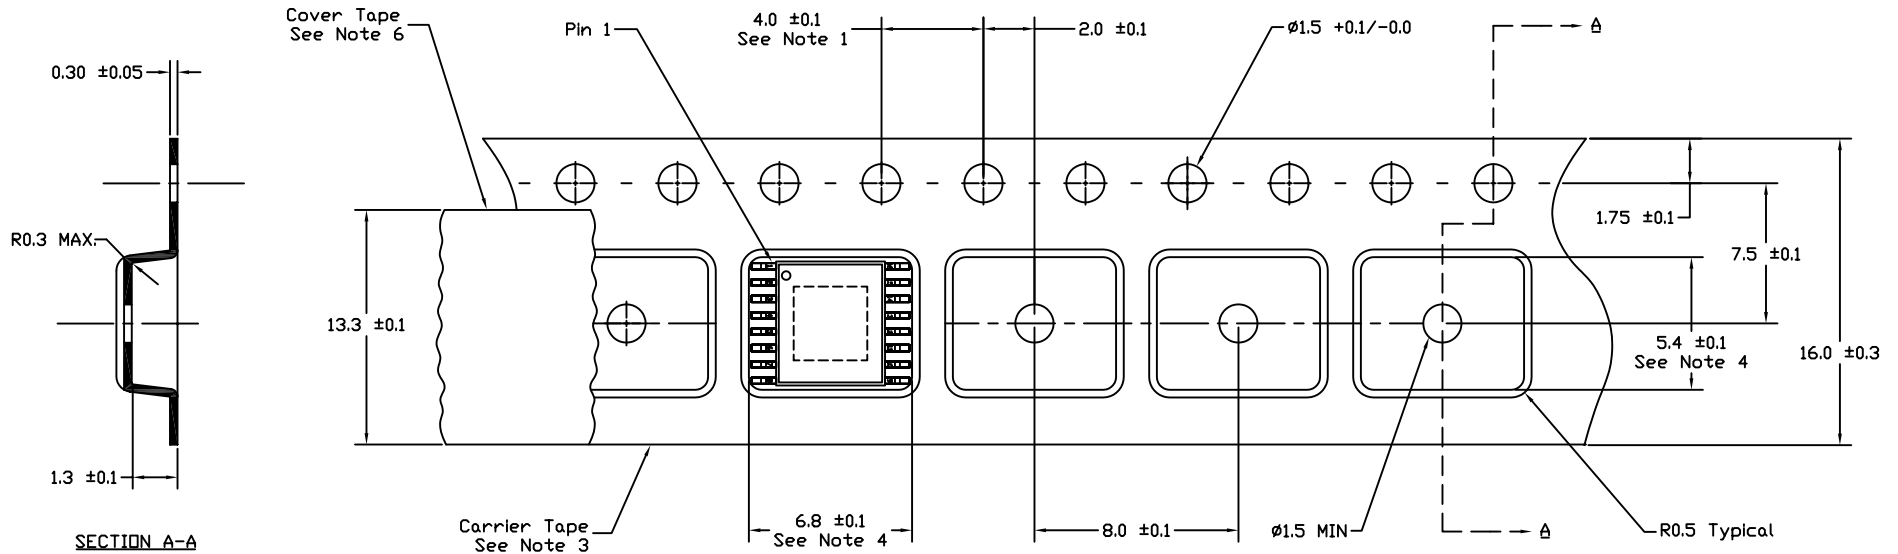

GENERAL NOTES

- 10 sprocket hole pitch cumulative tolerance
- Camber not to exceed 1mm in 100mm
- Material: Black Conductive Polystyrene
- Measured on a plane 0.3mm above the bottom of the pocket.
- Measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- Material: Antistatic Polyester Film

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM [INCHES] PER ANSI Y14.5M-1982.

TOLERANCES ARE:
 DECIMAL ANGLE
 .XX ±0.1[0.25] ±1/2°
 .XXX±.005[0.127]

MATERIAL(S):

FINISH:

NEXT ASSY WHERE USED

 MODEL

SCALE:

DO NOT SCALE DRAWING

SIGNATURE	DATE
DRG	
CHK	
TRB	

Dwg Template:
DDC-102671 (A)



DWG TITLE: Component Tape & reel Packaging

TSSOP-16 (Exposed Pad)

SIZE DWG NO. REV
 B MP0-102767 A

SHEET 1 OF 1