



**PROPRIETARY DATA**  
 This document may not be reproduced, disclosed, or otherwise used, in whole or in part, without the written permission of SIRENZA MICRODEVICES



REVISION HISTORY				
REV	DESCRIPTION	ECD	APPR	DATE
A	INITIAL RELEASE		Barcome	6/20/05

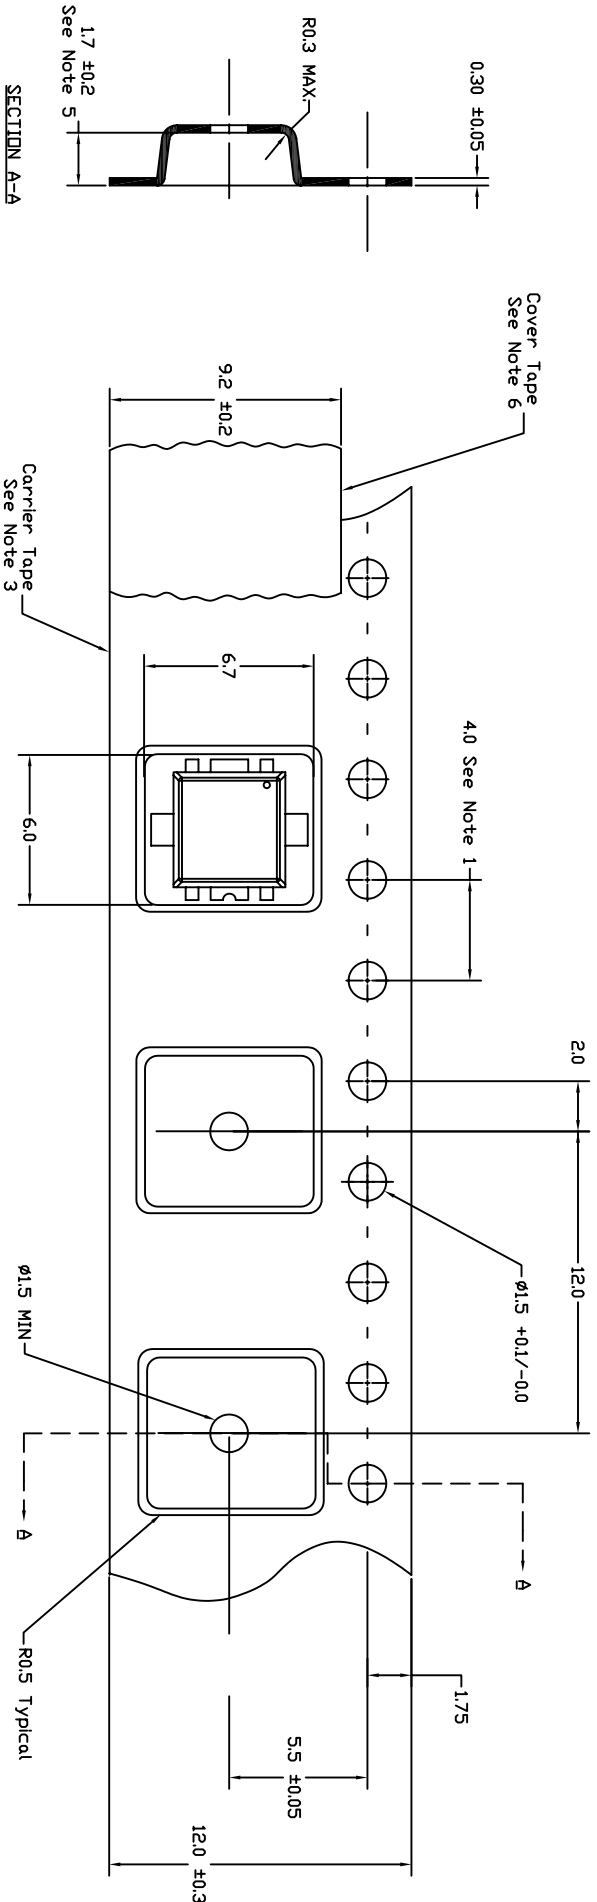

- GENERAL NOTES**
1. 10 sprocket hole pitch cumulative tolerance
  2. Camber not to exceed 1mm in 100mm
  3. Material: Black Conductive Polystyrene
  4. Measured on a plane 0.3mm above the bottom of the pocket.
  5. Measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
  6. Material: Antistatic Polyester Film



**UNLESS OTHERWISE SPECIFIED:**

UNIT	MM
CONVERSION PER ANSI Y14.5M-1982	
TOLERANCES ARE:	
DECIMAL	.XX ±0.01 [0.25]
ANGLE	±1/2°
MATERIAL(S)	XXXX.009 [0.127]

**SCALE:** DO NOT SCALE DRAWING

**SIGNATURE:** \_\_\_\_\_ **DATE:** \_\_\_\_\_

**DWG TITLE:** SDF26 Tape and Reel

**SIZE:** B **DWG NO.:** MPD-104787 **REV:** A

**DRG Designer:** DDC-106871 (A) **SHEET:** 1 OF 1