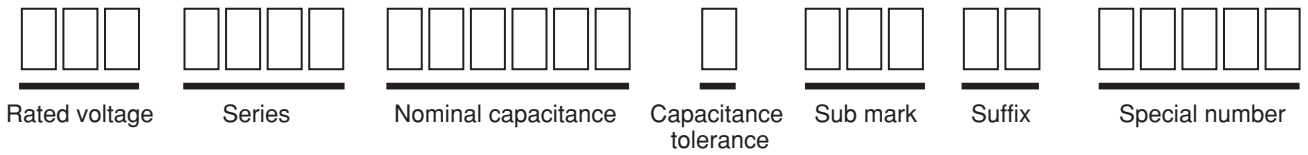


◆ PART NUMBER


Denoting "Series name"

Symbol denoting rated capacitance tolerance

Denoting special spec

Denoting "Support of Series name"

 Symbol denoting Lead style
Example

Symbol	Tolerance
G	± 2%
H	± 3%
J	± 5%
K	± 10%
M	± 20%

Symbol denoting rated capacitance expressed in pF.
The first two digits are significant figures of capacitance.
The third digit is the number of zeros to follow the significant figures.

Symbol	Lead style
T□	Taping ammo pack
(See below table)	Lead cut
	Forming lead cut

Denoting rated voltage by figure, but more than 1000V by sign.
Example 1000V → 101, 1600V → 161

◆ LEAD CUT AND FORMING LEAD CUT


Style	Style 1			Style 2			Style 3					
	L(mm)	LS(mm)	F	L	LS	F	L	LS	F	LS	F	
5.0	3.5	4.0	5.0	3.5	4.0	5.0	3.5	4.0	5.0	3.5	4.0	5.0
7.5	B1	B3	B7	S1	S3	S7	A1	A3	A7			
10.0	E1	E3	E7	W1	W3	W7						
15.0	H1	H3	H7	Q1	Q3	Q7						
22.5	Y1	Y3	Y7	K1	K3	K7						
	11	13	17	-	-	-						

*Example F=LS=10mm/L=4.0mm → CODE:H3
F=15mm/LS=7.5mm/L5.0mm → CODE:W7
L=3.5mm → CODE:A1


*There are many forming style, available.

◆ TAPING SPECIFICATIONS
◆ DIMENSIONS

- Formed Lead Type
- Style A.B.D


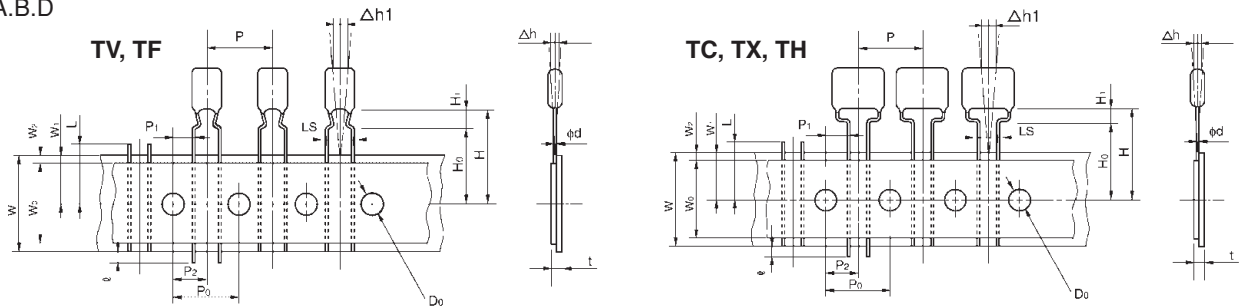


- Style C.E

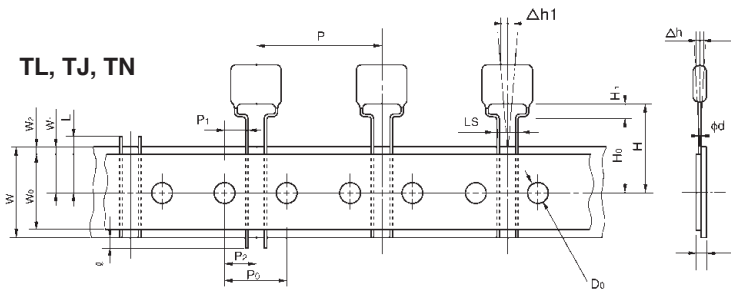

- Straight Lead Type

- Style S

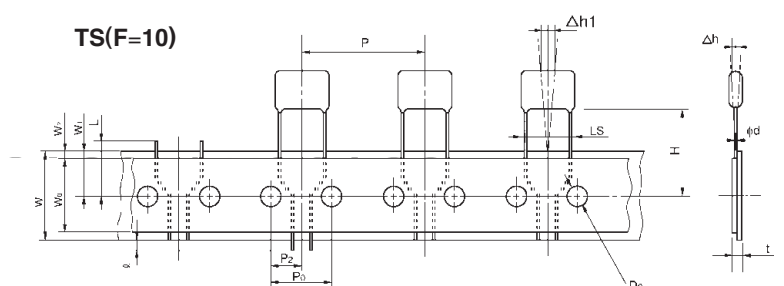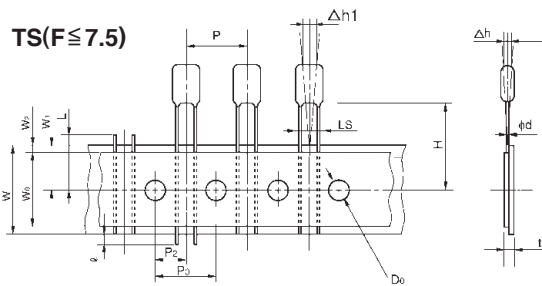

Items	STYLE SYMBOL		Formed Lead Type						Straight Lead Type	
			Style A		Style B		Style C		Style E	
	TV	TC	TF	TX	TL	TJ	TH	TN	Style S	
Original lead pitch	3.5~7.5	7.5	7.0~8.0	10.0	10.0~12.5	15.0	10.0	15.0~17.0	3.5~7.5	10.0
P	12.7 ± 1	7.5	15.0 ± 1	10.0	25.4 ± 1	15.0	15.0 ± 1	30.0 ± 1	12.7 ± 1	25.4 ± 1
P0	12.7 ± 0.2	7.5	15.0 ± 0.2	10.0	12.7 ± 0.2	15.0	15.0 ± 0.2	15.0 ± 0.2	12.7 ± 0.2	—
P1	3.85 ± 0.5	7.5	5.0 ± 0.5	10.0	3.85 ± 0.5	15.0	3.75 ± 0.5	3.75 ± 0.5	—	—
P2	6.35 ± 0.5	7.5	7.5 ± 0.5	10.0	6.35 ± 0.5	15.0	7.5 ± 0.5	7.5 ± 0.5	6.35 ± 0.5	—
LS	5.0 ± 0.2	7.5	5.0 ± 0.2	10.0	5.0 ± 0.2	15.0	7.5 ± 0.2	7.5 ± 0.2	F	—
W	18.0 ± 1.0	18.0	18.0 ± 1.0	18.0	18.0 ± 1.0	18.0	18.0 ± 1.0	18.0 ± 1.0	18.0 ± 1.0	18.0 ± 1.0
W0	5min	5min	5min	5min	5min	5min	5min	5min	5min	5min
W1	9.0 ± 0.5	9.0	9.0 ± 0.5	9.0	9.0 ± 0.5	9.0	9.0 ± 0.5	9.0 ± 0.5	9.0 ± 0.5	9.0 ± 0.5
W2	3.0max	3.0	3.0max	3.0	3.0max	3.0	3.0max	3.0max	3.0max	3.0max
φd	0.5~0.8									
H	20.0 ± 0.75	20.0	20.0 ± 0.75	20.0	20.0 ± 0.75	20.0	20.0 ± 0.75	20.0 ± 0.75	20.0 ± 0.75	20.0 ± 0.75
H0	16.0 ± 0.5	16.0	16.0 ± 0.5	16.0	16.0 ± 0.5	16.0	16.0 ± 0.5	16.0 ± 0.5	—	—
H1	5.0max									
D0	4.0 ± 0.2	4.0	4.0 ± 0.2	4.0	4.0 ± 0.2	4.0	4.0 ± 0.2	4.0 ± 0.2	4.0 ± 0.2	4.0 ± 0.2
L	11.0max	11.0	11.0max	11.0	11.0max	11.0	11.0max	11.0max	11.0max	11.0max
ℓ	0max	0	0max	0	0max	0	0max	0max	0max	0max
Δh	0 ± 1.0	0	0 ± 1.0	0	0 ± 1.0	0	0 ± 1.0	0 ± 1.0	0 ± 1.0	0 ± 1.0
Δh1	0 ± 1.0	0	0 ± 1.0	0	0 ± 1.0	0	0 ± 1.0	0 ± 1.0	0 ± 1.0	0 ± 1.0
t	φd+0.9max	φd	φd+0.9max	φd	φd+0.9max	φd	φd+0.9max	φd+0.9max	φd+0.9max	φd+0.9max

• Please consult us about other styles.