


立式端片型 PRZ 系列

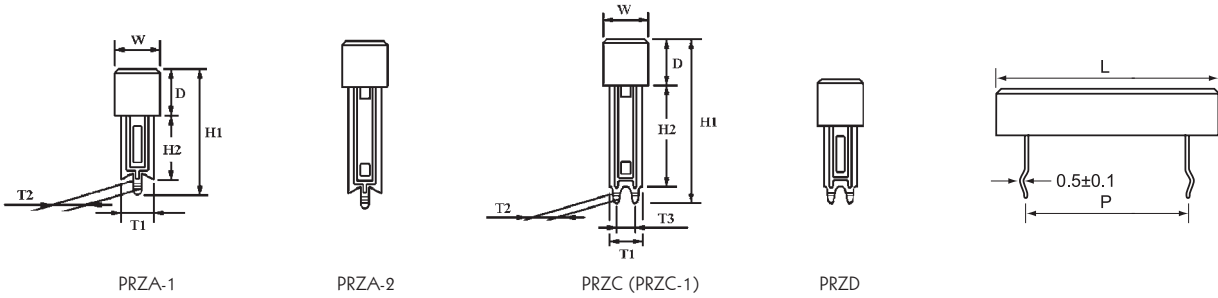

參考尺寸孔徑 (mm)

功率	PRZA-1, PRZA-2	PRZC, PRZD	P
3W			9.5
5W			15
7W			22
10W			35
15W			32
20W			45

功率	料號	類型	尺寸 (mm)										阻值範圍	
			W±1	D±1	L	P±1.5	T ₁ ±1	T ₂ ±0.2	T ₃ ±0.5	H ₁ ⁺² ₋₁	H ₂ ⁺² ₋₁	繞綫型	切割型	
3W	PZ1A3W	PRZA-1						1.6	-		24	10	0.1Ω~47Ω	48Ω~33KΩ
	PZ2A3W	PRZA-2	10	9	22 ± 1	9.5	7			39	25			
	PRZC3W	PRZC						1.5	3.5	36	22			
	PRZD3W	PRZD						1.3		24	10			
5W	PZ1A5W	PRZA-1			25/27 ± 1	9.5/15		1.6	-		24	10	0.1Ω~120Ω	121Ω~56KΩ
	PZ2A5W	PRZA-2	10	9	27 ± 1	15	7			39	25			
	PRZC5W	PRZC						1.5		36	22			
	PZ1C5W	PRZC-1							3.5	39	24			
	PRZD5W	PRZD						1.3		24	10			
7W	PZ1A7W	PRZA-1						1.6	-		24	10	0.1Ω~560Ω	561Ω~100KΩ
	PZ2A7W	PRZA-2	10	9	35 ± 1	22	7			39	25			
	PRZC7W	PRZC						1.5		36	22			
	PZ1C7W	PRZC-1							3.5	39	24			
10W	PRZD7W	PRZD						1.3		24	10	1Ω~820Ω	821Ω~100KΩ	
	PZ1AAW	PRZA-1						1.6	-		24			10
	PZ2AAW	PRZA-2	10	9	48 ± 1.5	32/35	7			39	25			
	PRZCAW	PRZC						1.5	3.5	36	22			
15W	PRZDAW	PRZD						1.3		24	10	1Ω~1KΩ	1.1KΩ~200KΩ	
	PZ1AFW	PRZA-1						3	-		35			15
	PZ2AFW	PRZA-2	12.5	11.5	48 ± 1.5	32	10			47	30			
20W	PRZCFW	PRZC						2	5	47	30	2Ω~1.2KΩ	1.3Ω~200KΩ	
	PZ1A20	PRZA-1						3	-		35			15
	PZ2A20	PRZA-2	12.5	13.5	63 ± 1.5	42	10			47	30			
	PRZC20	PRZC						2	5	47	30			