

Medium Power Film Capacitors



FPG - General Description

PROTECTION



Metallized polypropylene dielectric capacitor with controlled self-healing.

Reinforced metallization on margins developed for high impulse currents.

Axial connections specially developed to reduce series inductance and to provide rigid mechanical mounting.

APPLICATIONS

Protection of gate turn-off thyristor (G.T.O.).

Medium frequency tuning.

PACKAGING

Cylindrical in either plastic case (preferred packaging) or a resin molding.

Outputs: threaded inserts either M6 or M8.

Filled with thermosetting resin.

PROTECTION

ELECTRICAL CHARACTERISTICS

Capacitance range C_n	0.12 μ F to 6 μ F
Tolerance on C_n	$\pm 5\%$
Rated DC voltage $V_{n\text{dc}}$	800 to 3000 V
Peak voltage V_{peak}	1200 to 4000 V
Allowable overvoltage V_s (for 10 s/day)	1500 to 4600 V
Nominal RMS voltage $V_{n\text{dc}}$	500 to 1400 V
Stray inductance	$\approx 10 \text{ nH}$
RMS current	$I_{\text{rms}} \text{ max.} = \text{up to } 80 \text{ A}$ The currents shown in the tables are maximum. It is necessary to respect the thermal limits of the dielectric 85°C see "Hot spot temperature calculation"
Insulation resistance	$R_i \times C \geq 30,000 \text{ s}$
Impulse current	$I^2 \cdot t \text{ max. given in the tables}$ Spikes or peak currents in the capacitors may cause a deterioration of the bonding between the metallization and the connections. These bonds are capable of withstanding only a limited amount of energy for each spike. The table shows the maximum energy permitted in the form ($I^2 \cdot t$), where I is in Ampere, and t is in seconds.
Variation of capacitance with temperature	$\frac{\Delta C}{C} \leq \pm 2\%$ between -40 and 85°C
Climatic category	40/085/56 (IEC 60068)
Test voltage between terminals @ 25°C	V_s during 10s
Test voltage between terminals and case @ 25°C (Type test)	@ 4 kVrms @ 50 Hz during 1 min.

Note: The formula ($I^2 \cdot t$) replaces dV/dt which is less easy to use as it is not an expression of energy ($I = C \cdot dV/dt$).
This type of capacitor has been designed to withstand high ($I^2 \cdot t$) values.

For higher power protection devices and further information
please see PPX Series in Capacitor for High Power Electronics
available on AVX website: www.avxcorp.com

Medium Power Film Capacitors




FPG General Description / Application Notes

PROTECTION


PROTECTION

APPLICATION NOTES

G.T.O. PROTECTION

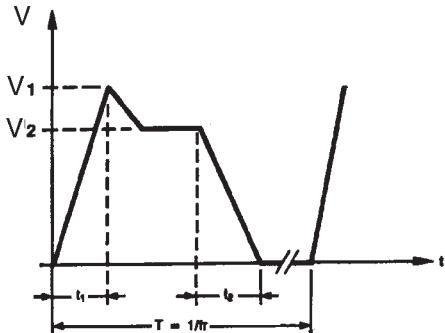

Choice of voltage: $V_1 \leq V_{\text{peak}}$
 $V_2 \leq V_{\text{ndc}}$
Maximum overvoltage $\leq V_s$ (10 s/day)

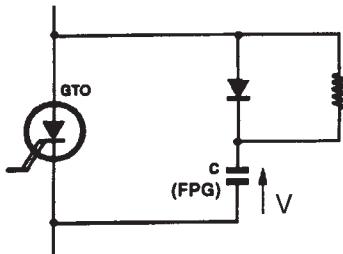

FPG: Snubber capacitor

Nominal DC voltage (V_{ndc}) and peak voltage (V_{peak}) are given in the table of values.

HOT SPOT TEMPERATURE CALCULATION

$$\theta_{\text{hot spot}} = \theta_{\text{terminals}} + (P_d + P_t) \times R_{\text{th}}$$

with

$$P_d \text{ (Dielectric losses)} = Q \times \operatorname{tg}\delta_0 \\ \Rightarrow [\frac{1}{2} \times C_n \times (V_{\text{peak to peak}})^2 \times f] \times (2 \times 10^{-4})$$

$$P_t \text{ (Thermal losses)} = R_s \times (I_{\text{rms}})^2$$

where

C_n in Farads

V in Volts

I_{rms} in Amperes

R_s in Ohms

f in Hertz

θ in °C



R_{th} in °C/W

MARKING

Logo
Withstanding surge voltage
Capacitance and tolerance in clear
Nominal DC voltage in clear
RMS current in clear
Date of manufacture (IEC coding)

DESIGN

Dimensions: millimeters (inches)

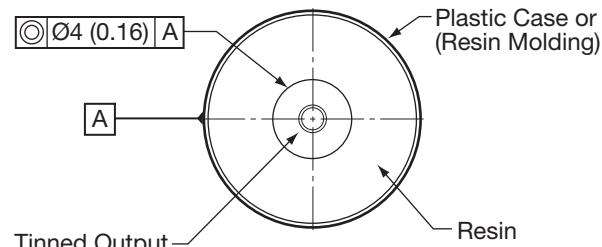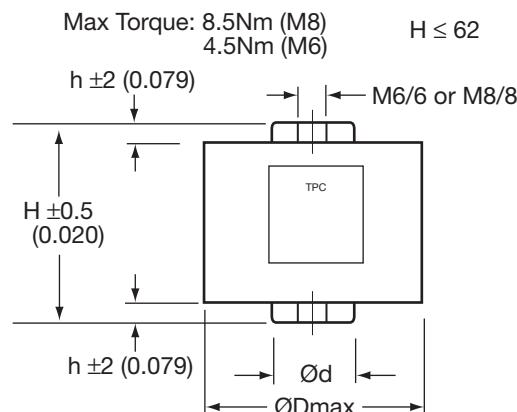

Dimensions: millimeters (inches)
General tolerance: ±2

Due to the design of the capacitor and its technology, the thermal impedance between the terminations and the core of the capacitor is low, it is necessary to take care that the capacitor is never overheated by use of incorrect sized connections.

In the case where the series diodes are screwed to the capacitor, cooling of the diodes must be taken in account.

Do not use the capacitor as a heat sink.

Due to the complexity of the diode/capacitor thermal exchanges, we recommend that thermal measurements shall be made on the different components. We would be pleased to advise you on specific problems.

WORKING TEMPERATURE

(according to the power to be dissipated) -40°C to +85°C

For higher power protection devices and further information please see PPX Series in Capacitor for High Power Electronics available on AVX website: www.avxcorp.com

Medium Power Film Capacitors



FPG Table of Values

PROTECTION

Dimensions: millimeters (inches)

Cn (μ F)	Case Type	Dimensions				I ² .t max. (A ² .s)	Irms max. (A)	Rs (m Ω)	Rth ($^{\circ}$ C/W)	Part Number
		H* ± 0.5 (± 0.020)	h ± 2 (± 0.079)	D max.	d ± 0.5 (± 0.020)					
FPG 1500 V						V _{ndc} = 800 V	V _{peak} = 1200 V	V _{rms} = 500 V	V _s = 1500 V	
1	Resin Molding M6/6	49 (1.929)	4.2 (0.165)	40 (1.575)	19 (0.748)	2	15	2.4	14	FPG66R0105J--
1.5	Resin Molding M6/6	49 (1.929)	4.2 (0.165)	55 (2.165)	19 (0.748)	4.6	20	1.6	10.5	FPG66R0155J--
2	Plastic Case M8/8	52 (2.047)	5 (0.197)	60 (2.362)	22 (0.866)	8	30	1.2	6.1	FPG86R0205J--
3	Plastic Case M8/8	52 (2.047)	5 (0.197)	72 (2.835)	22 (0.866)	18	45	0.9	4.5	FPG86R0305J--
3.5	Plastic Case M8/8	52 (2.047)	5 (0.197)	72 (2.835)	22 (0.866)	25	50	0.85	4.5	FPG86R0355J--
4	Plastic Case M8/8	52 (2.047)	5 (0.197)	82 (1.575)	22 (0.866)	32	60	0.75	3.5	FPG86R0405J--
5	Plastic Case M8/8	52 (2.047)	5 (0.197)	82 (3.622)	22 (0.866)	50	70	0.65	2.5	FPG86R0505J--
6	Resin Molding M8/8	52 (2.047)	5.7 (0.224)	92 (3.622)	28 (1.102)	73	75	0.6	2.5	FPG86R0605J--
FPG 2000 V						V _{ndc} = 1000 V	V _{peak} = 1600 V	V _{rms} = 600 V	V _s = 2000 V	
0.5	Plastic Case M6/6	52 (2.047)	5 (0.197)	40 (1.575)	18 (0.709)	1	15	3	14	FPG66N0504J--
1	Plastic Case M8/8	52 (2.047)	5 (0.197)	60 (2.362)	22 (0.866)	3	20	2.3	10.5	FPG86N0105J--
1.5	Plastic Case M8/8	52 (2.047)	5 (0.197)	60 (2.362)	22 (0.866)	7	30	1.5	6.1	FPG86N0155J--
2	Plastic Case M8/8	52 (2.047)	5 (0.197)	72 (2.835)	22 (0.866)	12.7	40	1.1	4.5	FPG86N0205J--
2.5	Plastic Case M8/8	52 (2.047)	5 (0.197)	72 (2.835)	22 (0.866)	20	60	0.89	3.7	FPG86N0255J--
3	Plastic Case M8/8	52 (2.047)	5 (0.197)	82 (3.228)	22 (0.866)	28	60	0.85	3.2	FPG86N0305J--
3.5	Plastic Case M8/8	52 (2.047)	5 (0.197)	82 (3.228)	22 (0.866)	39	65	0.78	2.9	FPG86N0355J--
4	Resin Molding M8/8	52 (2.047)	5.7 (0.224)	92 (3.622)	28 (1.102)	50	70	0.7	2.5	FPG86N0405J--
FPG 2500 V						V _{ndc} = 1300 V	V _{peak} = 2000 V	V _{rms} = 700 V	V _s = 2500 V	
0.47	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	40 (1.575)	19 (0.748)	0.7	15	6	25	FPG66P0474J--
1	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	55 (2.165)	19 (0.748)	2	18	3	13	FPG66P0105J--
1.5	Resin Molding M8/8	59 (2.323)	4.2 (0.165)	60 (2.362)	19 (0.748)	4.5	25	2	10	FPG66P0155J--
2	Plastic Case M8/8	62 (2.441)	5 (0.197)	72 (2.835)	22 (0.866)	8	35	1.5	6.5	FPG86P0205J--
2.5	Plastic Case M8/8	62 (2.441)	5 (0.197)	72 (2.835)	22 (0.866)	12.5	40	1.3	4.8	FPG86P0255J--
3	Resin Molding M8/8	62 (2.441)	5.7 (0.224)	82 (3.228)	28 (1.102)	18	50	1.15	4.4	FPG86P0305J--
4	Plastic Case M8/8	62 (2.441)	5 (0.197)	92 (3.622)	22 (0.866)	32	65	0.95	3.4	FPG86P0405J--

= Preferred standard values

PROTECTION

For higher power protection devices and further information
please see PPX Series in Capacitor for High Power Electronics
available on AVX website: www.avxcorp.com

Medium Power Film Capacitors



FPG Table of Values

PROTECTION

PROTECTION

Dimensions: millimeters (inches)

C _n (μ F)	Case Type	Dimensions				I ² .t max. (A ² .s)	I _{rms} max. (A)	R _s (m Ω)	R _{th} (°C/W)	References
		H* ± 0.5 (± 0.020)	h ± 2 (± 0.079)	D max.	d ± 0.5 (± 0.020)					
FPG 2600 V						V_{ndc} = 1750 V	V_{peak} = 2000 V	V_{rms} = 800 V	V_s = 2600 V	
0.47	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	40 (1.575)	19 (0.748)	1.4	12	4.04	28	FPG66W0474J--
1	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	55 (2.165)	19 (0.748)	5.7	21	2.17	10.9	FPG66W0105J--
1.5	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	60 (2.362)	19 (0.748)	12.9	31	1.55	7.7	FPG66W0155J--
2	Plastic Case M8/8	62 (2.441)	5 (0.197)	72 (2.835)	22 (0.866)	23	41	1.24	6.1	FPG86W0205J--
2.5	Resin Molding M8/8	62 (2.441)	5.7 (0.224)	82 (3.228)	28 (1.102)	36	51	1.05	4.5	FPG86W0255J--
3	Plastic Case M8/8	62 (2.441)	5 (0.197)	92 (3.622)	22 (0.866)	50	62	0.92	3.9	FPG86W0305J--
3.5	Plastic Case M8/8	62 (2.441)	5 (0.197)	92 (3.622)	22 (0.866)	70	72	0.83	3.4	FPG86W0355J--
3.9	Plastic Case M8/8	62 (2.441)	5 (0.197)	92 (3.622)	22 (0.866)	85	80	0.78	3.1	FPG86W0395J--
FPG 3500 V						V_{ndc} = 2000 V	V_{peak} = 2400 V	V_{rms} = 1000 V	V_s = 3500 V	
0.33	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	40 (1.575)	19 (0.748)	2	15	2.5	28	FPG66X0334J--
0.5	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	55 (2.165)	19 (0.748)	5	19	2.5	11.2	FPG66X0504J--
1	Plastic Case M8/8	62 (2.441)	5 (0.197)	72 (2.835)	22 (0.866)	15	38	1.4	6.2	FPG86X0105J--
1.5	Resin Molding M8/8	62 (2.441)	5.7 (0.224)	82 (3.228)	28 (1.102)	40	56	1.03	3.9	FPG86X0155J--
2	Plastic Case M8/8	62 (2.441)	5 (0.197)	92 (3.622)	22 (0.866)	70	75	0.85	3.1	FPG86X0205J--
FPG 4500 V						V_{ndc} = 2500 V	V_{peak} = 3200 V	V_{rms} = 1200 V	V_s = 4500 V	
0.22	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	40 (1.575)	19 (0.748)	1.5	15	3.8	25	FPG66Z0224J--
0.47	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	60 (2.362)	19 (0.748)	7	24	2.16	8.5	FPG66Z0474J--
0.68	Plastic Case M8/8	62 (2.441)	5 (0.197)	72 (2.835)	22 (0.866)	14	35	1.59	6.2	FPG86Z0684J--
1	Resin Molding M8/8	62 (2.441)	5.7 (0.224)	82 (3.228)	28 (1.102)	30	52	1.18	4	FPG86Z0105J--
1.25	Plastic Case M8/8	62 (2.441)	5 (0.197)	92 (3.622)	22 (0.866)	50	65	1	3.3	FPG86Z1254J--
FPG 4600 V						V_{ndc} = 3000 V	V_{peak} = 4000 V	V_{rms} = 1400 V	V_s = 4600 V	
0.12	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	40 (1.575)	19 (0.748)	0.8	15	6	28	FPG66Y0124J--
0.22	Resin Molding M6/6	59 (2.323)	4.2 (0.165)	60 (2.362)	19 (0.748)	3	20	3.48	11	FPG66Y0224J--
0.33	Plastic Case M8/8	62 (2.441)	5 (0.197)	72 (2.835)	22 (0.866)	6.8	25	2.42	7.7	FPG86Y0334J--
0.47	Resin Molding M8/8	62 (2.441)	5.7 (0.224)	82 (3.228)	28 (1.102)	13.8	35	1.79	5.2	FPG86Y0474J--
0.60	Plastic Case M8/8	62 (2.441)	5 (0.197)	92 (3.622)	22 (0.866)	22	45	1.47	4.2	FPG86Y0604J--

= Preferred standard values

For higher power protection devices and further information
please see PPX Series in Capacitor for High Power Electronics
available on AVX website: www.avxcorp.com